





3P AC OUTLET RECEPTACLE





AC-141

ORDERING CODE:

AC-141--




PANEL CUT OUT DIM.
(THICKNESS SEE TABLE)

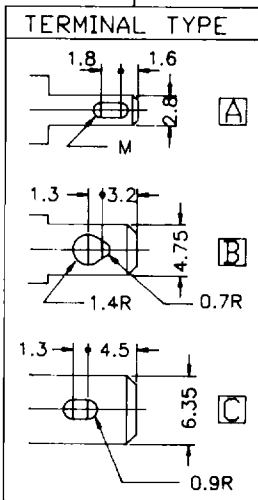

DIM. "A"		
300	3.0	3.16
250	2.5	2.65
230	2.3	2.44
200	2.0	2.14
180	1.8	1.94
150	1.5	1.63
130	1.3	1.43
100	1.0	1.12
PART NUMBER	PANEL THICKNESS	DIM "A"

Insulation Resistance: 5000M Ω Min.
Dielectric Strength: 2000V Min.
Operating Temperature: 65°C
15A 250V: UL, CSA.
10A 250V: VDE, SEV.





(HOT TYPE)


AC-015

ORDERING CODE:



AC-015--

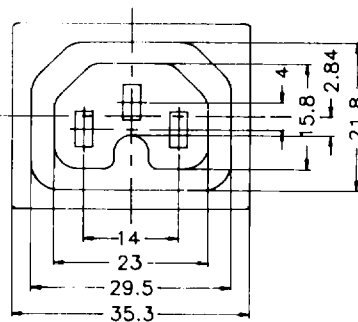

SEE TERMINAL TABLE



PANEL CUT OUT DIM.
(THICKNESS SEE TABLE)

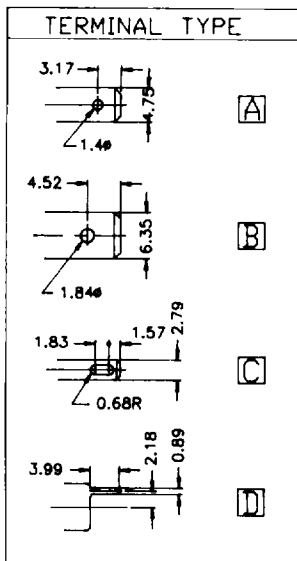

DIM. "A"		
300	3.0	3.33
250	2.5	2.79
230	2.3	2.44
200	2.0	2.23
180	1.8	1.95
150	1.5	1.7
130	1.3	1.4
100	1.0	1.14
PART NUMBER	PANEL THICKNESS	DIM "A"

Insulation Resistance: 500M Ω Min.
Dielectric Strength: 2000V Min.
Operating Temperature: 120°C
15A 250V: CSA
10A 250V: UL