


# 610 Series CMP Cat 6 UTP Cable

TE610P

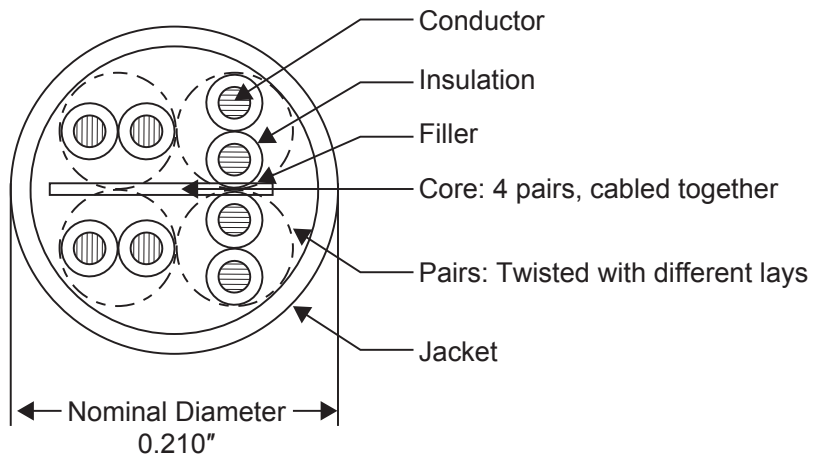

## Description

TE Connectivity's 610 Series Category 6 cables meet ANSI/TIA-568-C.2 Category 6 and ISO/IEC 11801 Class E performance requirements on all parameters. The TE Category 6 System complies with all of the performance requirements for current and proposed applications.

610 Series Category 6 UTP cables are available in standard colors including white, gray, blue and yellow. Category 6 cables from TE feature lead-free jacketing. Packaging is either on reels or in a pull-box, with standard put-ups being 1000ft splice-free lengths.

## Specification

Horizontal cabling shall be 24 AWG, 4-pair UTP, NEC/NFPA CMP rated and be independently verified for compliance. Cable jacketing shall be white, gray, blue or yellow and shall be lead-free. Cable shall meet all ANSI/TIA and ISO Category 6/Class E requirements as well as meet the performance requirements listed in the table shown on page 2.

Cable shall be supplied on reels or in a pull-box. Independent verification for flammability compliance shall be to NEC article 800 and NFPA 70; CMP (NFPA 262). Horizontal cable shall be TE catalog number TE610P-XXYY.

# 610 Series CMP Cat 6 UTP Cable

TE610P

## PERFORMANCE DATA

FREQ MHZ	FITTED IMPEDANCE Ohms		INSERTION LOSS dB/100 m		RETURN LOSS dB/100 m		PAIR-PAIR NEXT dB/100 m		PSNEXT dB/100 m	
	Spec		Max	Spec	Min	Spec	Min	Spec	Min	Spec
1	100+/-15		1.8	2.0	24.1	20.0	79.5	74.3	76.3	72.3
4	100+/-15		3.5	3.8	26.7	22.9	71.2	65.3	65.2	63.3
8	100+/-15		5.0	5.3	29.2	24.5	67.6	60.8	62.5	58.8
10	100+/-15		5.7	6.0	27.4	25.0	65.6	59.3	61.9	57.3
16	100+/-15		7.2	7.6	26.3	25.0	62.8	56.2	57.8	54.2
20	100+/-15		8.1	8.5	29.1	25.0	61.2	54.8	55.7	52.8
25	100+/-15		9.0	9.5	30.4	24.3	57.8	53.3	53.2	51.3
31.25	100+/-15		10.1	10.7	29.3	23.6	56.2	51.9	51.9	49.9
62.5	100+/-15		14.7	15.4	26.0	21.5	53.6	47.4	47.6	45.4
100	100+/-15		18.6	19.8	22.3	20.1	50.5	44.3	43.9	42.3
155	100+/-15		23.8	25.2	20.8	18.8	47.2	41.4	42.1	39.4
200	100+/-15		27.1	29.0	19.5	18.0	46.3	39.8	40.5	37.8
250	100+/-15		31.2	32.8	18.1	17.3	43.9	38.3	39.6	36.3
300	100+/-15		35.2	-	25.5	-	39.3	-	38.1	-
350	100+/-15		39.2	-	23.4	-	36.1	-	35.6	-
400	100+/-15		43.4	-	20.5	-	31.4	-	30.2	-

## PERFORMANCE DATA

FREQ MHZ	PAIR-PAIR ACR dB/100 m		PSACR dB/100 m		PAIR-PAIR ACRF dB/100 m		PSACRF dB/100 m		TCL dB/100 m	ELTCTL dB/100 m
	Min	Spec	Min	Spec	Min	Spec	Min	Spec	Min	Min
1	77.4	72.3	75.2	70.3	71.5	67.8	69.8	64.8	40.0	35.0
4	68.5	61.5	65.3	59.5	59.8	55.8	58.9	52.8	40.0	23.0
8	63.1	55.4	58.9	53.4	57.5	49.7	52.5	46.7	40.0	16.9
10	60.5	53.3	52.1	51.3	52.5	47.8	51.6	44.8	40.0	15.0
16	55.2	48.7	49.2	46.7	47.6	43.7	46.8	40.7	38.0	10.9
20	52.6	46.3	46.5	44.3	46.3	41.8	44.2	38.8	37.0	9.0
25	48.3	43.8	44.9	41.8	44.5	39.8	42.5	36.8	36.0	7.0
31.25	45.7	41.2	43.1	39.2	41.8	37.9	40.8	34.9	35.1	5.1
62.5	36.8	32.0	35.6	30.0	37.6	31.9	31.9	28.9	32.0	-
100	31.4	24.5	28.7	22.5	32.5	27.8	27.1	24.8	30.0	-
155	22.6	16.3	21.3	14.3	29.7	24.0	26.8	21.0	28.1	-
200	18.8	10.8	16.8	8.8	27.4	21.8	25.2	18.8	27.0	-
250	14.7	5.5	9.7	3.5	23.8	19.8	22.4	16.8	26.0	-
300	10.1	-	7.5	-	20.1	-	24.9	-	-	-
350	5.4	-	1.8	-	16.6	-	23.6	-	-	-
400	1.2	-	0	-	12.5	-	21.8	-	-	-

NOTE: The above listed discrete frequency electrical performance values are provided for engineering information only. Actual compliance testing is based on swept frequency measurements.

# 610 Series CMP Cat 6 UTP Cable

TE610P

## SPECIFICATIONS

<b>Mutual Capacitance:</b>		5.6 nF/100 m nominal
<b>Fitted Impedance:</b>		100 $\Omega$ $\pm$ 15%, 1 - 400 MHz
<b>Conductor DC Resistance:</b>		28.6 $\Omega$ /1000 ft (9.38 $\Omega$ /100 m) maximum
<b>Voltage:</b>		300 VDC
<b>Delay Skew:</b>		45 ns
<b>Propagation Delay:</b>		536 ns/100 m @ 250 MHz
<b>Nominal Velocity of Propagation:</b>		72%
<b>Operating Temperature:</b>		-20° C - 60° C (-4° F - 140° F)
<b>Storage Temperature:</b>		-20° C - 80° C (-4° F - 176° F)
<b>Installation Temperature:</b>		5° C - 50° C (41° F - 122° F)
<b>Bend Radius:</b>		4 $\times$ cable diameter
<b>Packaging:</b>	1000' Pull-box:	24 lbs/kft
	1000' Reel:	24 lbs/kft
<b>Materials:</b>	Conductors:	24 AWG, Solid Copper
	Insulation:	$\varnothing$ .037 nominal, plenum grade materials
	Jacket:	$\varnothing$ .210 nominal, FR PVC
<b>Compliances:</b>		UL Subject 444 (UL)-C(UL) Type CMP ICEA S-90-661 ETL Verified TIA-568-C.2 Category 6 Horizontal Cable Requirements ISO/IEC 11801 Category 6 Horizontal Cable Requirements 2002/95/EC RoHS



## ORDERING INFORMATION

Product Description	Packaging	Part Numbers
610 Series Cat 6 UTP Cable, 4-Pair, Plenum (CMP) Rated	1000' Pull-Box	TE610P-XXII
	1000' Reel	TE610P-XX02

\*Additional reel sizes available, please contact TE customer service.

The following jacket colors are available. Replace XX with:

BL= Blue	WT=White	GY=Gray	YL=Yellow	GN=Green
BK=Black	RD=Red	OR=Orange	VT=Violet	BN=Brown

## DATA SHEET



**Contact us:**  
Greensboro, NC  
USA 27409-8420  
Tel: 1-800-553-0938  
Fax: 1-717-986-7406

[www.te.com/EnterpriseNetworks](http://www.te.com/EnterpriseNetworks)

TE Connectivity, TE connectivity (logo), Tyco Electronics, TE (logo), are trademarks of the TE Connectivity Ltd. family of companies and its licensors.

While TE Connectivity has made every reasonable effort to ensure the accuracy of the information in this document, TE Connectivity does not guarantee that it is error-free, nor does TE Connectivity make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE Connectivity reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE Connectivity for the latest dimensions and design specifications.

Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved.

110033AE 12/12 Revision © 2012, 2011