

2.54mm (0.1") Strip Handle Jumper


2207 Series

APPLICATION AND FEATURES

1. Packaged in strips of 10 units for ease of handling.
2. Stackable on 2.54mm center.
3. Mate with any common pairs of 0.64mm square pin and 0.64mm diameter round pin.
4. Test probe hole allows electrical inspection of contact during application.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator resistance:	5000 Megohms min.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40° to +105°C
Contact Material:	Phosphor bronze
Insulator Material:	Polyester, UL 94V-0
©Standard: P.B.T	

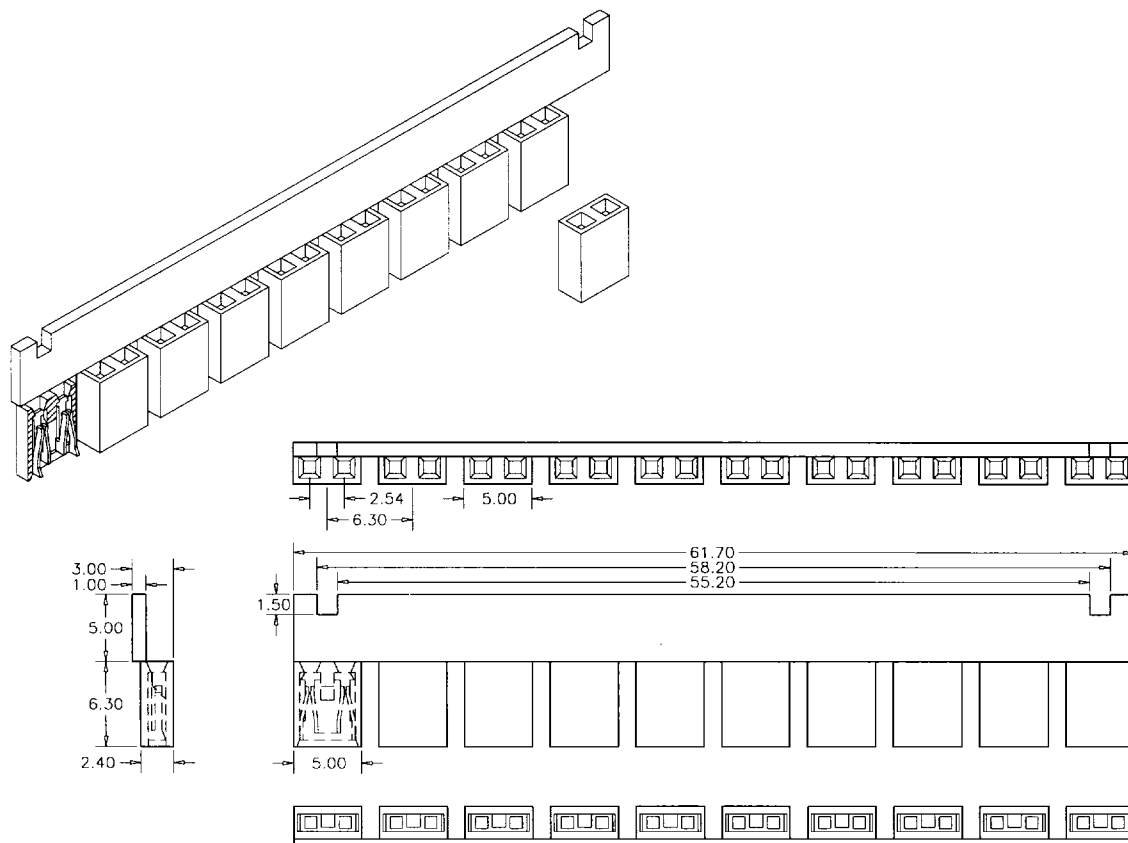

Order Information 2207 Series

Example: 2207-10-B-02

Series No.	Number of Contacts	Open or Close	Contact Plating
2207	10 Units (2 Circuits/Unit)	Open Type B	Tin Plated 01
			Gold Plated
			Flash 02
			10 μ" 10
			30 μ" 30

SINGATRON U.S.A. Tel: (909)464-1883 Fax: (909)464-1884 Email: sales@singatron.com