
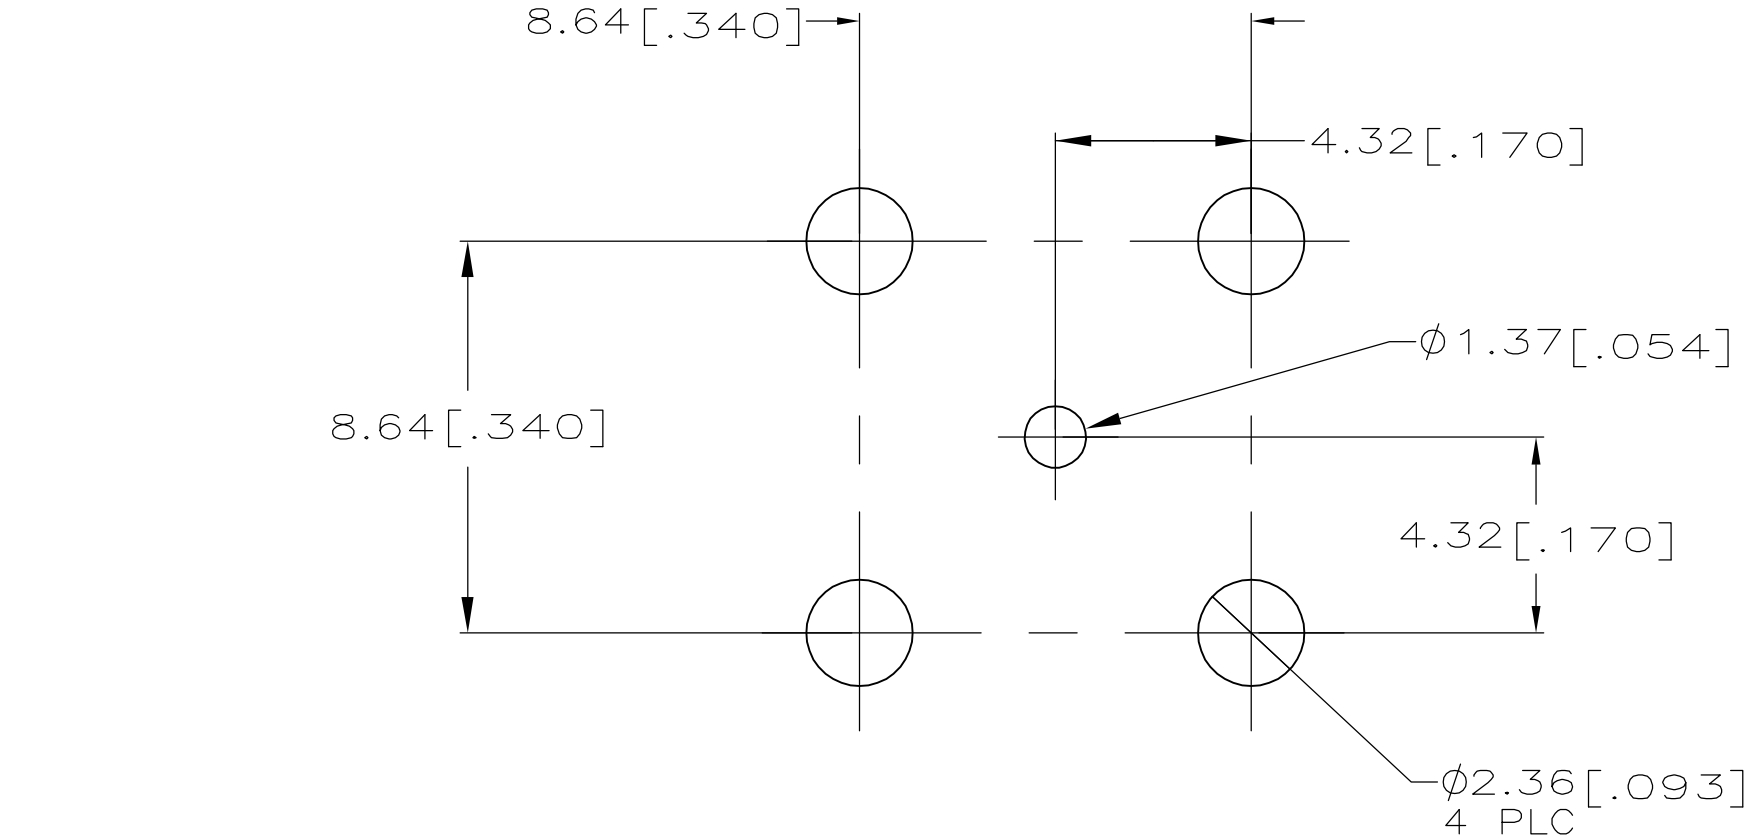


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		A	REV PER ECO 07-006131	15MAR2007	DW	JL

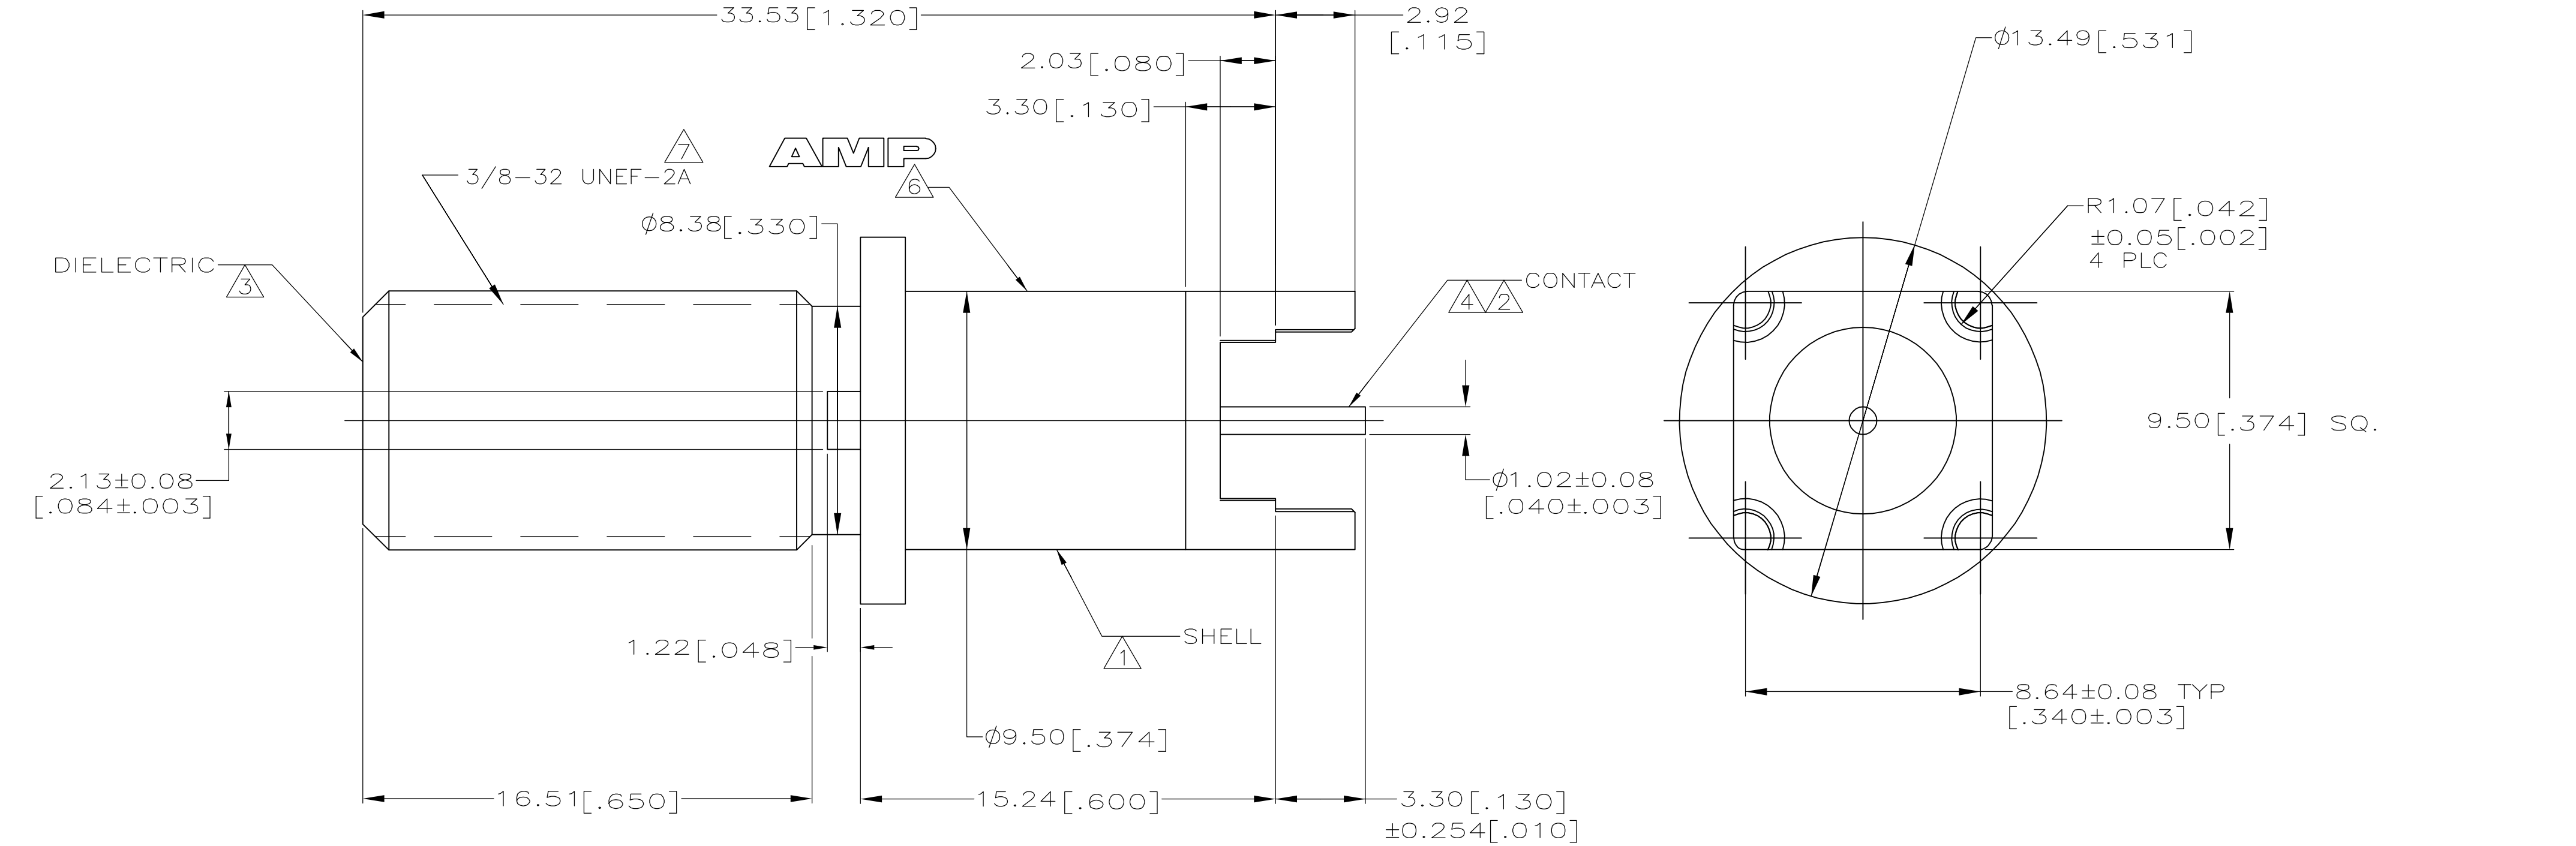

PCB CONFIGURATION

TOLERANCE = ±0.08 [.003]

- 1 ZINC PER QQ-Z-363.
- 2 PHOSPHOR BRONZE PER QQ-B-750.
- 3 POLYMETHYLPENTENE AND ACETAL, GENERAL PURPOSE.
- 4 MATTE TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 5. CONNECTOR WILL ACCEPT A CENTER CONDUCTOR DIAMETER RANGE OF 0.56 [.022] – 1.19 [.047].
- 6 LOGO WILL BE LOCATED ON SURFACE INDICATED.
- 7 MAJOR DIA MODIFIED TO .363 REF.
- 8 BRIGHT TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.

8	6274020-2
4	6274020-1
SHELL FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - 01FEB2005 CHK J. HAVENER 01FEB2005 APVD K. WEIDNER 01FEB2005		tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608					
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME JACK, VERT, PCB, F SERIES					
	0 PLC ± -		PRODUCT SPEC						
	1 PLC ± -		-						
	2 PLC ± 0.20 [.008]		APPLICATION SPEC						
	3 PLC ± -		-						
MATERIAL 	4 PLC ± -		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
	ANGLES ± ±		A2		00779	C=6274020	-		
	FINISH		WEIGHT		-				
	SEE TABLE		CUSTOMER DRAWING						
		SCALE			6:1	SHEET	1 of 1	REV	A