


## AC and Pulse Film/Foil Capacitors Radial Potted Type

Dimensions in millimeters

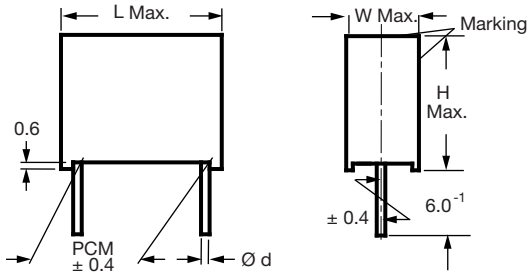

W	Ø d
≥ 16	1.0
< 16.0	0.8

### MAIN APPLICATIONS

High voltage, very high current and high pulse operations, deflection circuits in TV sets (fly-back tuning). Electronic ballasts, protection circuits in SMPS's. Snubber and SCR commutating circuits.

### MARKING

Manufacturer's logo, type, C-value, rated voltage, tolerance, data of manufacture

### DIELECTRIC

Polypropylene film

### ELECTRODES

Aluminum foil

### COATING

Flame retardant plastic case (UL-class 94 V-0), epoxy resin sealed.

### CONSTRUCTION

Extended aluminum foil, internal series connection, double-sided metallized, polyester carrier film

### INSULATION RESISTANCE

Measured at 500 V<sub>DC</sub> after one minute  
100 000 MΩ minimum value, (1000 GΩ typical value)

### FEATURES

- Compliant to RoHS directive 2002/95/EC

### LEADS

Tinned wire

### IEC TEST CLASSIFICATION

55/100/56 according to IEC 60068

### OPERATING TEMPERATURE RANGE

- 55 °C to + 100 °C

### CAPACITANCE RANGE

100 pF to 0.22 µF

### CAPACITANCE TOLERANCES

± 10 % (K), ± 5 % (J)

### RATED VOLTAGES

630 V<sub>DC</sub>, 1000 V<sub>DC</sub>, 1250 V<sub>DC</sub>, 1600 V<sub>DC</sub>, 2000 V<sub>DC</sub>

### PERMISSIBLE AC VOLTAGES (RMS) UP TO 60 Hz

300 V<sub>AC</sub>, 350 V<sub>AC</sub>, 400 V<sub>AC</sub>, 500 V<sub>AC</sub>, 600 V<sub>AC</sub>

### TEST VOLTAGES (ELECTRODE/ELECTRODE)

2 x U<sub>R</sub> for 2 s

### TEMPERATURE COEFFICIENT

- 250 x 10<sup>-6</sup>/°C (typical value)

### CAPACITANCE DRIFT

Up to + 40 °C, ± 0.5 % for a period of two years

### DERATING FOR DC AND AC CATEGORY VOLTAGE UC

At + 85 °C: U<sub>C</sub> = 1.0 U<sub>R</sub>

At + 100 °C: U<sub>C</sub> = 0.7 U<sub>R</sub>

### SELF INDUCTANCE

~ 6 nH measured with 2 mm long leads

### PULL TEST ON LEADS

≥ 30 N in direction of leads according to IEC 60068-2-21

### RELIABILITY

Operational life > 300 000 h

Failure rate < 1 FIT (0.5 x U<sub>R</sub> and 40 °C)

For further details, please refer to the general information available at [www.vishay.com/doc?26033](http://www.vishay.com/doc?26033)



**RoHS**  
COMPLIANT



**MAXIMUM PULSE RISE TIME**

PCM (mm)	Maximum Pulse Rise Time dV/dt [V/μs]				
	630 V <sub>DC</sub>	1000 V <sub>DC</sub>	1250 V <sub>DC</sub>	1600 V <sub>DC</sub>	2000 V <sub>DC</sub>
15	6500	8200	11 100	13 900	13 900
22.5	2600	3200	4600	6000	9800
27.5	1800	2300	3100	4000	6000
37.5	1200	1500	1900	2400	3500

**Note**

• If the maximum pulse voltage is less than the rated voltage higher dV/dt values can be permitted.

**DISSIPATION FACTOR TAN δ**

MEASURED AT	C ≤ 0.1 μF	C > 1.0 μF
1 kHz	0.3 x 10 <sup>-3</sup>	0.3 x 10 <sup>-3</sup>
10 kHz	0.4 x 10 <sup>-3</sup>	0.4 x 10 <sup>-3</sup>
100 kHz	1 x 10 <sup>-3</sup>	-
Maximum values		

CAPACITANCE	CAPACITANCE CODE	VOLTAGE CODE 63 630 V <sub>DC</sub> /300 V <sub>AC</sub>				VOLTAGE CODE 10 1000 V <sub>DC</sub> /350 V <sub>AC</sub>				VOLTAGE CODE 12 1250 V <sub>DC</sub> /400 V <sub>AC</sub>			
		W	H	L	PCM	W	H	L	PCM	W	H	L	PCM
100 pF	-110	-	-	-	-	-	-	-	-	-	-	-	-
150 pF	-115	-	-	-	-	-	-	-	-	-	-	-	-
220 pF	-122	-	-	-	-	-	-	-	-	-	-	-	-
330 pF	-133	-	-	-	-	-	-	-	-	-	-	-	-
470 pF	-147	-	-	-	-	-	-	-	-	-	-	-	-
680 pF	-168	-	-	-	-	-	-	-	-	-	-	-	-
1000 pF	-210	-	-	-	-	-	-	-	-	-	-	-	-
1200 pF	-212	-	-	-	-	-	-	-	-	5.5	10.5	18.0	15
1500 pF	-215	-	-	-	-	-	-	-	-	5.5	10.5	18.0	15
1800 pF	-218	-	-	-	-	5.5	10.5	18.0	15	6.5	12.5	18.0	15
2200 pF	-222	-	-	-	-	5.5	10.5	18.0	15	6.5	12.5	18.0	15
2700 pF	-227	5.5	10.5	18.0	15	6.5	12.5	18.0	15	7.5	13.5	18.0	15
3300 pF	-233	5.5	10.5	18.0	15	6.5	12.5	18.0	15	7.5	13.5	18.0	15
3900 pF	-239	6.5	12.5	18.0	15	7.5	13.5	18.0	15	6.5	14.5	26.5	22.5
4700 pF	-247	6.5	12.5	18.0	15	7.5	13.5	18.0	15	6.5	14.5	26.5	22.5
5600 pF	-256	7.5	13.5	18.0	15	8.5	14.5	18.0	15	6.5	14.5	26.5	22.5
6800 pF	-268	7.5	13.5	18.0	15	8.5	14.5	18.0	15	6.5	14.5	26.5	22.5
8200 pF	-282	8.5	14.5	18.0	15	6.5	14.5	26.5	22.5	57.5	15.5	26.5	22.5
0.01 μF	-310	8.5	14.5	18.0	15	6.5	14.5	26.5	22.5	7.5	15.5	26.5	22.5
0.012 μF	-312	8.5	17.5	18.0	15	7.5	15.5	26.5	22.5	10.5	18.5	26.5	22.5
0.015 μF	-315	10.5	17.5	18.0	15	7.5	15.5	26.5	22.5	10.5	18.5	26.5	22.5
0.018 μF	-318	7.5	15.5	26.5	22.5	8.5	16.5	26.5	22.5	11.0	21.0	26.5	22.5
0.022 μF	-322	7.5	15.5	26.5	22.5	8.5	16.5	26.5	22.5	11.0	21.0	26.5	22.5
0.027 μF	-327	8.5	16.5	26.5	22.5	10.5	18.5	26.5	22.5	11.0	21.0	31.0	27.5
0.033 μF	-333	10.5	18.5	26.5	22.5	11.5	20.5	31.5	27.5	11.0	21.0	31.0	27.5
0.039 μF	-339	10.5	18.5	26.5	22.5	11.5	20.5	31.5	27.5	13.5	23.5	31.5	27.5
0.047 μF	-347	10.5	18.5	26.5	22.5	11.5	20.5	31.5	27.5	13.5	23.5	31.5	27.5
0.056 μF	-356	11.5	20.5	31.5	27.5	12.5	22.5	41.5	37.5	12.5	23.5	41.5	37.5
0.068 μF	-368	11.5	20.5	31.5	27.5	12.5	22.5	41.5	37.5	12.5	22.5	41.5	37.5
0.082 μF	-382	11.5	20.5	31.5	27.5	12.5	22.5	41.5	37.5	14.5	24.5	41.5	37.5
0.1 μF	-410	13.5	23.5	31.5	27.5	14.5	24.5	41.5	37.5	14.5	24.5	41.5	37.5
0.12 μF	-412	12.5	22.5	41.5	37.5	14.5	24.5	41.5	37.5	16.0	28.5	41.5	37.5
0.15 μF	-415	12.5	22.5	41.5	37.5	16.0	28.5	41.5	37.5	16.0	28.5	41.5	37.5
0.18 μF	-418	14.5	24.5	41.5	37.5	16.0	28.5	41.5	37.5	20.0	40.0	42.5	37.5
0.22 μF	-422	14.5	24.5	41.5	37.5	18.0	32.5	41.5	37.5	20.0	40.0	42.5	37.5

**Note**

• Further C-values upon request.



**RECOMMENDED PACKAGING**

LETTER CODE	TYPE OF PACKAGING	HEIGHT (H) (mm)	REEL DIAMETER (mm)	ORDERING CODE EXAMPLES	PCM 15	PCM 22.5 to 27.5	PCM 37.5
D	Ammo	16.5	S <sup>(1)</sup>	KP 1836-168/205-D	X	-	-
G	Ammo	18.5	S <sup>(1)</sup>	KP 1836-168/205-G	X	-	-
F	Reel	16.5	350	KP 1836-168/205-F	X	-	-
W	Reel	18.5	350	KP 1836-168/205-W	X	-	-
V	Reel	18.5	500	KP 1836-310/134-V	X	X	-
G	Ammo	18.5	L <sup>(2)</sup>	KP 1836-310/134-G	-	X	-
-	Bulk	-	-	KP 1836-310/134	X	X	X

**Note**

<sup>(1)</sup> S = box size 55 mm x 210 mm x 340 mm (W x H x L)

<sup>(2)</sup> L = box size 60 mm x 360 mm x 510 mm (W x H x L)

CAPACITANCE	CAPACITANCE CODE	VOLTAGE CODE 13 1600 V <sub>DC</sub> /500 V <sub>AC</sub>				VOLTAGE CODE 20 2000 V <sub>DC</sub> /600 V <sub>AC</sub>			
		W	H	L	PCM	W	H	L	PCM
100 pF	-110	-	-	-	-	5.5	10.5	18.0	15
150 pF	-115	-	-	-	-	5.5	10.5	18.0	15
220 pF	-122	-	-	-	-	5.5	10.5	18.0	15
330 pF	-133	-	-	-	-	5.5	10.5	18.0	15
470 pF	-147	-	-	-	-	5.5	10.5	18.0	15
680 pF	-168	5.5	10.5	18.0	15	5.5	10.5	18.0	15
1000 pF	-210	5.5	10.5	18.0	15	6.5	14.5	26.5	22.5
1200 pF	-212	6.5	12.5	18.0	15	6.5	14.5	26.5	22.5
1500 pF	-215	6.5	12.5	18.0	15	6.5	14.5	26.5	22.5
1800 pF	-218	6.5	14.5	26.5	22.5	6.5	14.5	26.5	22.5
2200 pF	-222	6.5	14.5	26.5	22.5	6.5	14.5	26.5	22.5
2700 pF	-227	6.5	14.5	26.5	22.5	7.5	15.5	26.5	22.5
3300 pF	-233	6.5	14.5	26.5	22.5	7.5	15.5	26.5	22.5
3900 pF	-239	7.5	15.5	26.5	22.5	10.5	18.5	26.5	22.5
4700 pF	-247	7.5	15.5	26.5	22.5	10.5	18.5	26.5	22.5
5600 pF	-256	8.5	16.5	26.5	22.5	10.5	18.5	26.5	22.5
6800 pF	-268	8.5	16.5	26.5	22.5	11.5	20.5	31.5	27.5
8200 pF	-282	10.5	18.5	26.5	22.5	11.5	20.5	31.5	27.5
0.01 μF	-310	10.5	18.5	26.5	22.5	11.5	20.5	31.5	27.5
0.012 μF	-312	11.5	20.5	31.5	27.5	13.5	23.5	31.5	27.5
0.015 μF	-315	11.5	20.5	31.5	27.5	13.5	23.5	31.5	27.5
0.018 μF	-318	11.5	20.5	31.5	27.5	15.0	24.5	31.5	27.5
0.022 μF	-322	11.5	20.5	31.5	27.5	15.0	24.5	31.5	27.5
0.027 μF	-327	13.5	23.5	31.5	27.5	14.5	24.5	41.5	37.5
0.033 μF	-333	13.5	23.5	31.5	27.5	14.5	24.5	41.5	37.5
0.039 μF	-339	12.5	22.5	41.5	37.5	16.0	28.5	41.5	37.5
0.047 μF	-347	12.5	22.5	41.5	37.5	16.0	28.5	41.5	37.5
0.056 μF	-356	14.5	24.5	41.5	37.5	-	-	-	-
0.068 μF	-368	14.5	24.5	41.5	37.5	-	-	-	-
0.082 μF	-382	16.0	28.5	41.5	37.5	-	-	-	-
0.1 μF	-410	16.0	28.5	41.5	37.5	-	-	-	-
0.12 μF	-412	-	-	-	-	-	-	-	-
0.15 μF	-415	-	-	-	-	-	-	-	-
0.18 μF	-418	-	-	-	-	-	-	-	-
0.22 μF	-422	-	-	-	-	-	-	-	-

**Note**

- Further C-values upon request.


**RECOMMENDED PACKAGING**

LETTER CODE	TYPE OF PACKAGING	HEIGHT (H) (mm)	REEL DIAMETER (mm)	ORDERING CODE EXAMPLES	PCM 15	PCM 22.5 to 27.5	PCM 37.5
D	Ammo	16.5	S <sup>(1)</sup>	KP 1836-168/205-D	X	-	-
G	Ammo	18.5	S <sup>(1)</sup>	KP 1836-168/205-G	X	-	-
F	Reel	16.5	350	KP 1836-168/205-F	X	-	-
W	Reel	18.5	350	KP 1836-168/205-W	X	-	-
V	Reel	18.5	500	KP 1836-310/134-V	X	X	-
G	Ammo	18.5	L <sup>(2)</sup>	KP 1836-310/134-G	-	X	-
-	Bulk	-	-	KP 1836-310/134	X	X	X


**Note**

(1) S = box size 55 mm x 210 mm x 340 mm (W x H x L)


(2) L = box size 60 mm x 360 mm x 510 mm (W x H x L)

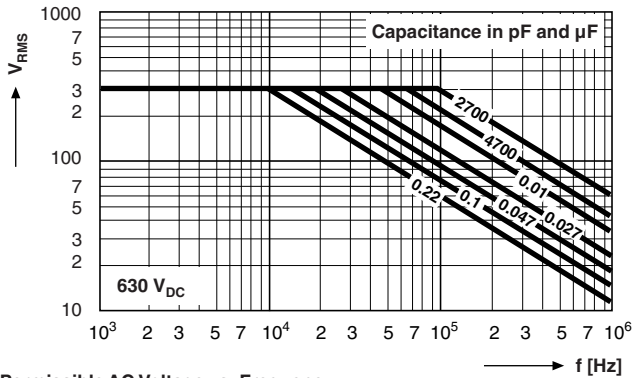


Permissible AC Voltage vs. Frequency

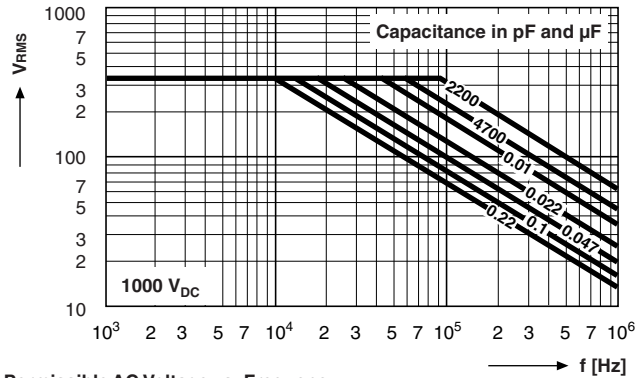


Permissible AC Voltage vs. Frequency

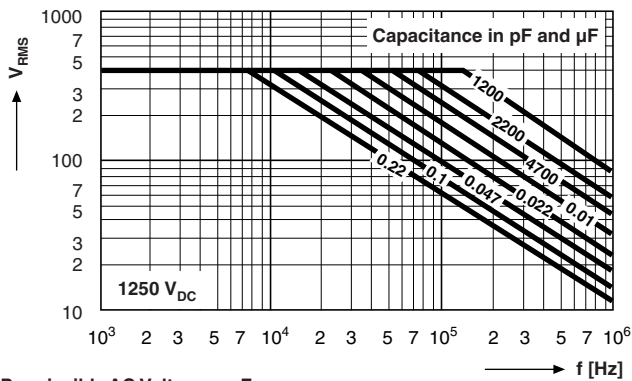

Permissible AC Voltage vs. Frequency

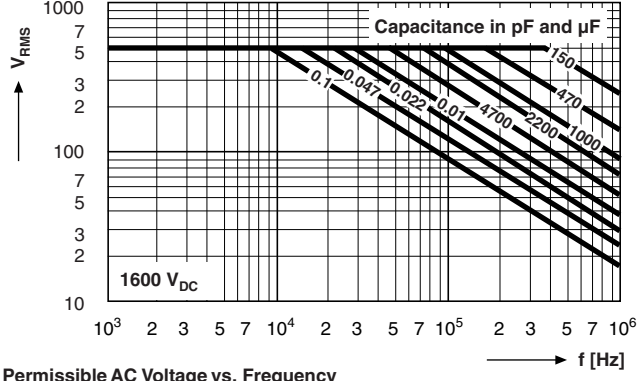

Permissible AC Voltage vs. Frequency

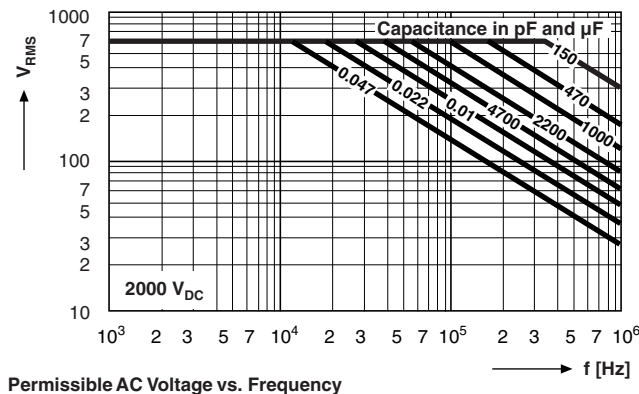

Permissible AC Voltage vs. Frequency



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**