

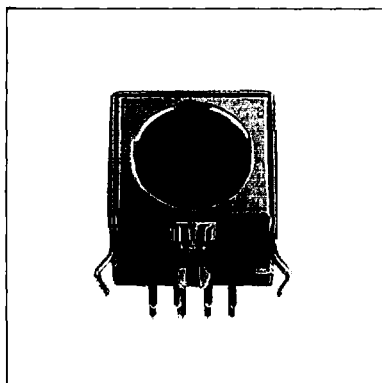


MINIATURE CIRCULAR CONNECTORS (WITH SHIELD)




MDJ-516-8PS

Rating: 1A 100V AC
3A 12V DC
Insulation Resistance: 50MΩ MIN.
Dielectric strength: 250V AC/1 minute
Contact Resistance: 30mΩ MAX.

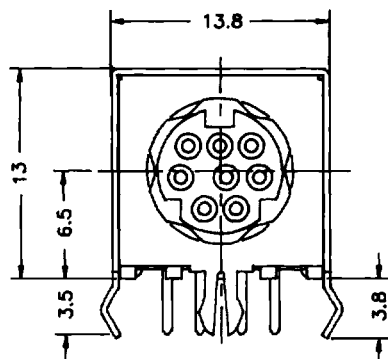

W/O GROUNDING SPRING



W/I GROUNDING SPRING

ARRANGEMENT OF CONTACTS							
NO OF CONTACTS	3	4	5	6	7	8	
MODEL NO	W/O GROUNDING SPRING	MDJ-511-3PS	MDJ-512-4PS	MDJ-513-5PS	MDJ-514-6PS	MDJ-515-7PS	MDJ-516-8PS
	W/I GROUNDING SPRING	MDJ-511-3PGS	MDJ-512-4PGS	MDJ-513-5PGS	MDJ-514-6PGS	MDJ-515-7PGS	MDJ-516-8PGS
HOLE LAYOUT (BOTTOM VIEW)							