

# Isolator & Circulator


## CDMA, GSM, AMPS Series

### Features

- 820-960 MHz
- Low Insertion Loss
- Power Handling 10-200 Watts

### Description

XMA isolators and circulators are widely used in mobile communication, satellite communication, radar, electronic countermeasures and telemetry, etc. as well as other products requiring small volume, low insertion loss, high isolation and good power handling.

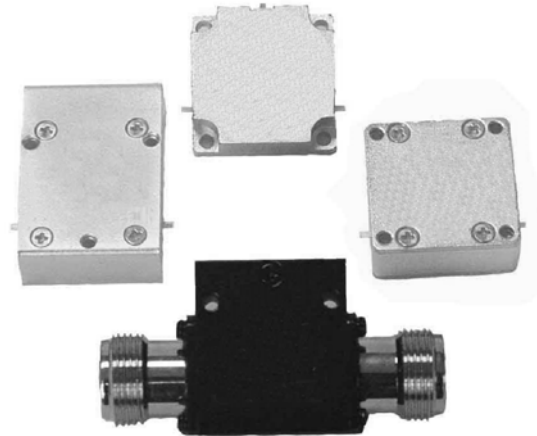

### Ordering Information

Part Number	Frequency (MHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
XMAISO-1-X*	820-840	0.25	23	1.15
XMAISO-2-X	824-869	0.25	22	1.15
XMAISO-3-X	824-894	0.35	21	1.20
XMAISO-4-X	825-835	0.25	22	1.15
XMAISO-5-X	869-894	0.25	23	1.15
XMAISO-6-X	830-872	0.30	21	1.20
XMAISO-7-X	846-876	0.25	23	1.20
XMAISO-8-X	870-880	0.25	21	1.20
XMAISO-9-X	859-904	0.30	23	1.20
XMAISO-10-X	880-915	0.25	23	1.15
XMAISO-11-X	880-960	0.30	21	1.20
XMAISO-12-X	885-920	0.25	23	1.15
XMAISO-13-X	900-980	0.35	20	1.20
XMAISO-14-X	905-925	0.25	23	1.15
XMAISO-15-X	935-940	0.25	23	1.15
XMAISO-16-X	921-960	0.25	23	1.15
XMAISO-17-X	947-960	0.25	23	1.15
<b>Power Handling:</b> 10-200 Watts		<b>Temperature Range:</b> -30 to +70 °C / -22 to 158 °F		

### \*Optional Connectors

S=SMA	N=Type	B=BNC	T=TNC	D=Din	DP=Drop In
-------	--------	-------	-------	-------	------------

Some connector configurations may not be available. Please contact XMA with specifications

Specifications subject to change without notice.