
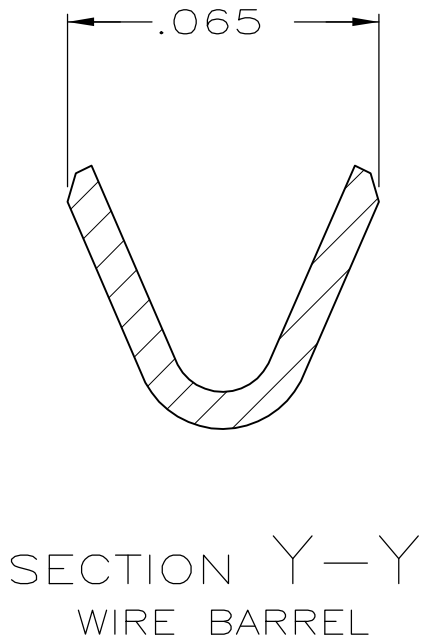
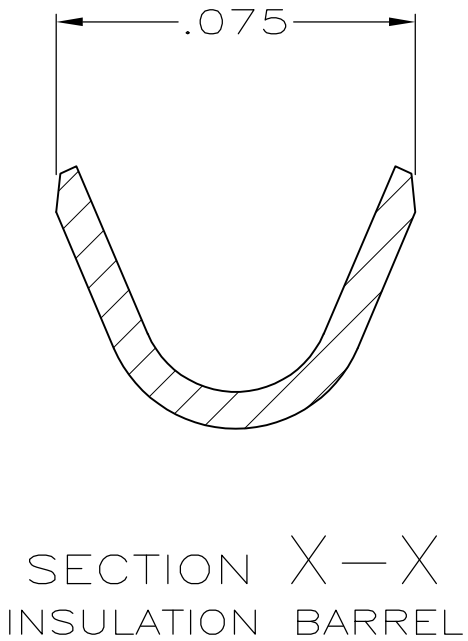
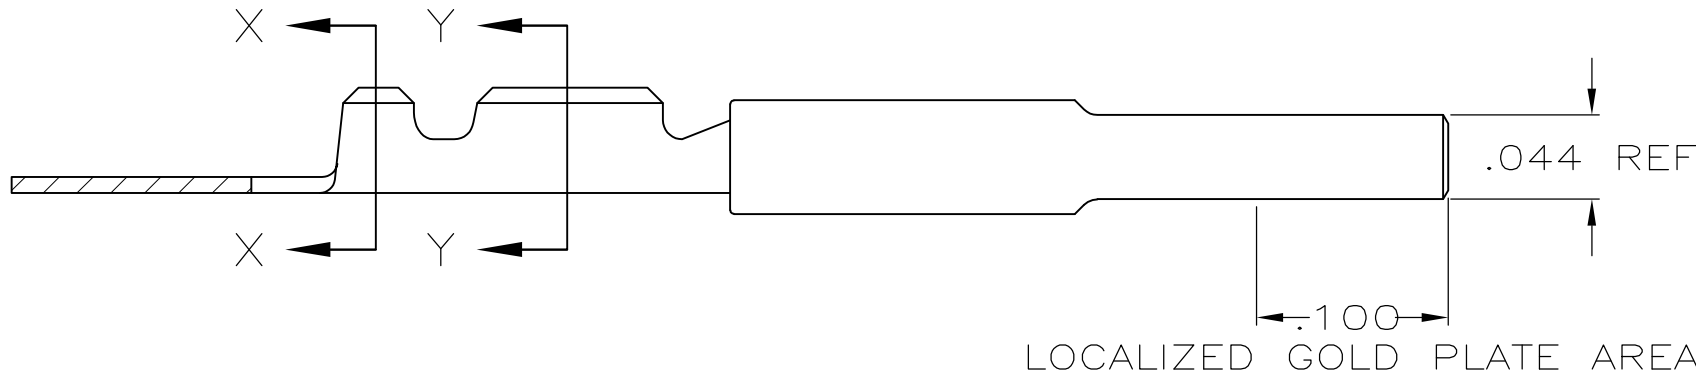


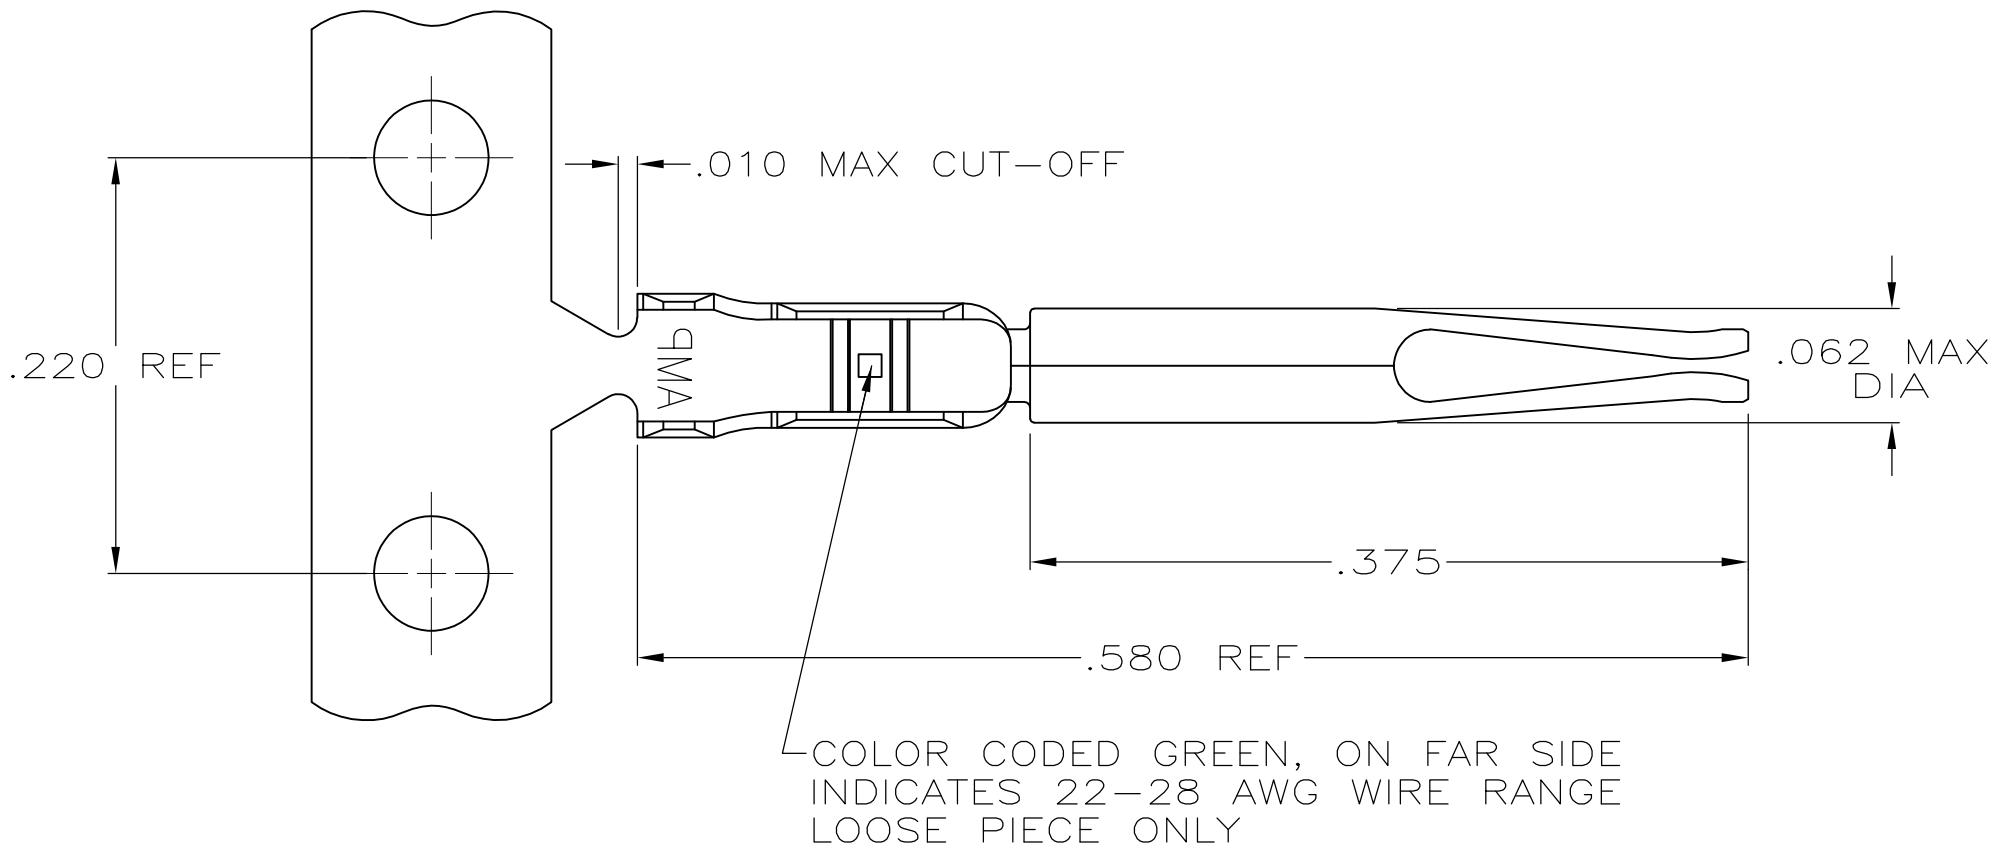

- 1 FOR MINI APPLICATOR.
- 2 FOR HAND TOOL USE ONLY.
3. WIRE RANGE OF 22-28, INSULATION RANGE OF .030-.040.
- 4 GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PLATING PER MIL-T-10727.
- 5 PLATED WITH .000030 GOLD IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000050 NICKEL.
- 6 PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000030 NICKEL.
- 7 PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, .000050 GOLD ON REMAINDER, ALL OVER .000050 NICKEL UNDERPLATE.
- 8 GOLD PLATING ON THE CARRIER STRIP IS NOT REQUIRED.
- 9 OBSOLETE.

SMALL PACK	6	9	748610-7	91-748610-1
-	7	8	748610-9	748610-8
STANDARD	6	9	748610-7	748610-5
-	5	9	748610-4	748610-2
PACKAGING	FINISH 4	LOOSE PIECE 2	PART NUMBER 1	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 1-12-88 C.RICHARD	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK 1-14-88 W.LENKER	NAME	
		APVD 1-19-88 V.KUMAR	SOCKET CONTACT, SIZE 22 DF, 22-28 AWG, W/.030-.040 DIA INSULATION SUPPORT	
		PRODUCT SPEC		
		APPLICATION SPEC		
MATERIAL PHOS BRONZE PER QQ-B-750	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± 0° 30' FINISH SEE TABLE	WEIGHT -	SIZE A2 CAGE CODE 00779 DRAWING NO C-748610	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1	REV H