

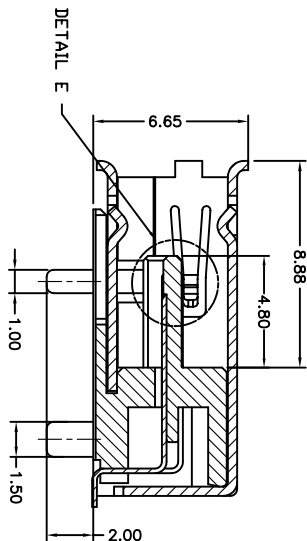
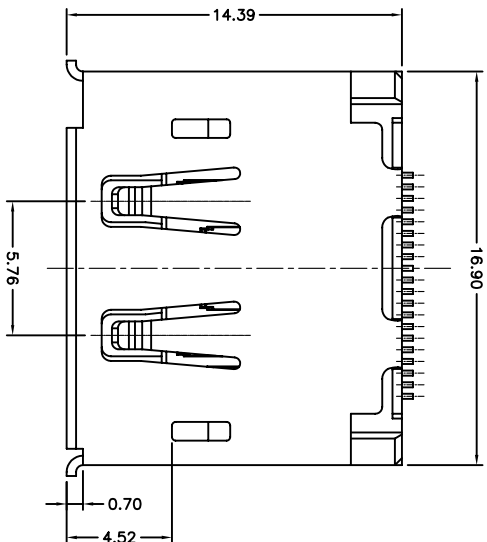

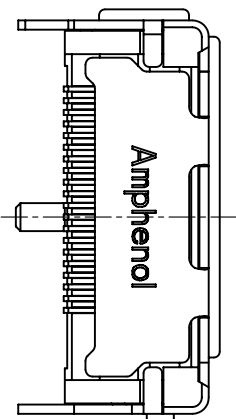


Customer Drawing

REVISIONS			
SYM	ECN	DESCRIPTION	DATE
1	HK5456	New Release	11/13/08
2	HK6205	UPDATE DRAWING	06/01/10

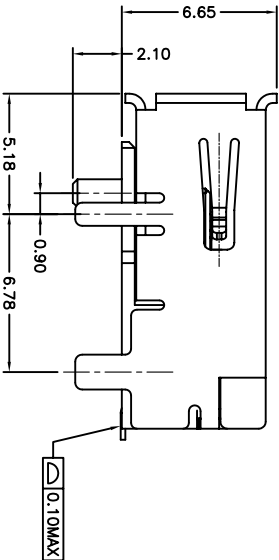

SECTION A-A

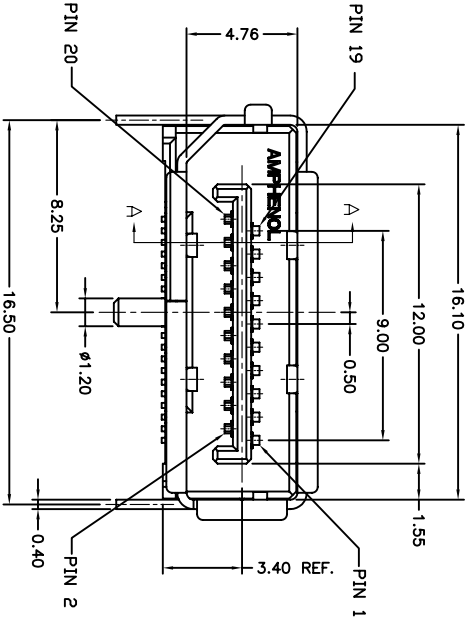



DETAIL E
SCALE 2:1



- NOTES:
- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE PLASTIC UL94V-0, BLACK.
CONTACT: PHOSPHOR BRONZE ,THICKNESS=0.20mm
SHIELD: BRASS OR SPCC, THICKNESS=0.4mm
 - 2.FINISH:
CONTACT: REFER TO P/N SYSTEM ON MATING AREA
1.27~2.54um NICKEL UNDERPLATE OVERALL
2.54~5.08um PURE TIN ON SOLDER TAIL
SHIELD: REFER TO P/N SYSTEM
 - 3.ELECTRICAL SPECIFICATION:
CURRENT RATING: 0.5A
CONTACT RESISTANCE: 30mΩ MAX
INSULATOR RESISTANCE: 100MΩ MIN(UNMATED) 10MΩ MIN(MATED)
DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC(UNMATED) 300 V AC(MATED)
 4. ORDER P/N SYSTEM: DP-F201-001-X-X-XX

- MATING AREA PLATING:
1- 0.76um MIN Au.
2- 0.38um MIN Au.
A- Gold FLASH
- PACKING METHOD:
N/A- PACKING IN TRAY.
TR- PACKING IN TAPE AND REEL.
- SHELL PLATING:
1- GOLD FLASH PLATED.
2- SOLDERABLE NICKEL PLATED.
3- TIN PLATED.
4- SOLDERABLE BLACK NICKEL PLATED.

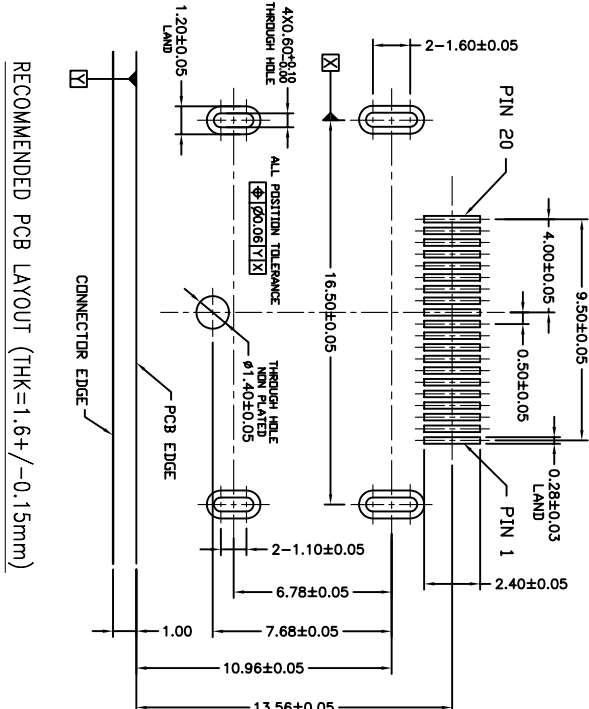

ITEM	PART	NO.	REQ'D	DESCRIPTION
PARTS LIST				
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		Amphenol
U.S.		DRAWN	TONY.ZHENG06/01/10	
METRIC		CHECKED	VICTOR.LIN 06/01/10	
X +/- XX +/- XXX +/- FRACTIONS +/- ANGLES +/-		CHECKED		
±0.50 ±0.25 ±0.10		DRAWING FILE : Drawing/DP/CDPF201001XXXX-2		
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION		
REMOVE SHARP EDGES				
DIMENSIONS		TITLE		
U.S.	INCHES	DISPLAYPORT R/A SMT RECEPTACLE (SHELL DIP)		
(METRIC)	(MM)	SIZE	DRAWING NO.	REV.
		A3	C DP-F201-001-X-X-XX	2
		SCALE	NONE	SHEET 1 OF 1