

FXPT FlexiPlug™ Pluggable Terminal Block Screw/Pressure Plate Termination

.200"

PCD's new FXPT terminal blocks feature U.S. style barrier block wire terminations designed for a standard screwdriver, and mate with PCD ELHF headers and many competitive European style scalloped headers. FlexiPlug™ can be used interchangeably with moving cage clamp style plugs, such as PCD's ELF. Select either approach, or use both in the same system.

Screw/pressure plate termination systems (SEMS) in a tri-barrier configuration accept a #2 Phillips head 1/4" slotted screwdriver to provide easy wire termination and a strong mechanical and electrical connection.

MATERIALS:

Housing: Black PPO

Contact: Phosphor bronze

Plating: Tin-lead

Hardware: M3 SEM screw, steel, nickel plated

SPECIFICATIONS:

Maximum Operating Temperature: 105°C

Dielectric Withstanding: 3000V

Current Rating: 15 A

Operating Voltage: 300 V

Insulation Resistance: 10¹¹ ohms

Wire Range: #12-26 AWG solid and stranded

Wire Pullout Force: Meets UL 486

INSTALLATION:


Wire Strip Length: .250"

Tightening Torque: 12 in.-lbs.


Screwdriver: #2 Phillips, 1/4" blade

APPROVAL:

UL recognized under File No. E83421

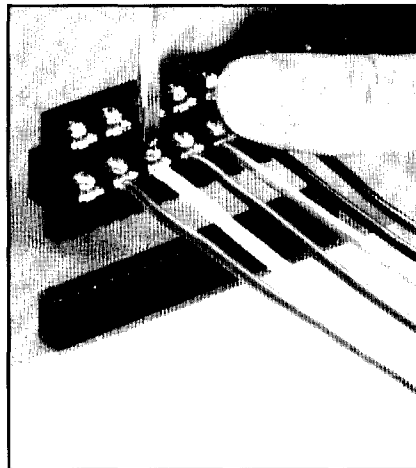

- **SCREW CLAMP WIRE TERMINATION**
- **TRI-BARRIER BLOCKS**
- **MATES WITH PCD AND OTHER PIN HEADERS**
- **.200" CENTERS**
- **2 TO 24 POSITIONS**

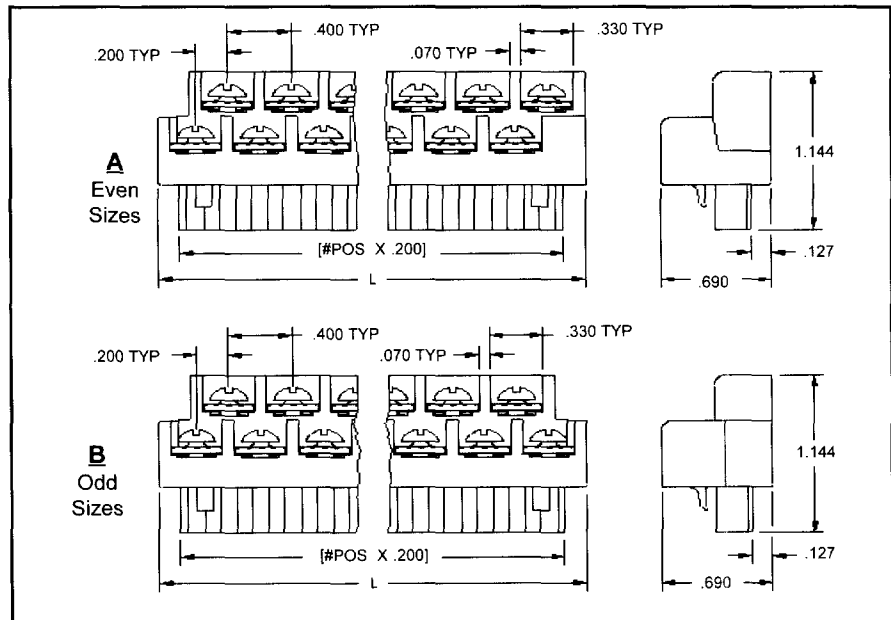

POS	CATALOG NO.	L"	STYLE	POS	CATALOG NO.	L"	STYLE
2	FXPT02200	0.67	A	14	FXPT14200	3.07	A
3	FXPT03200	0.87	B	15	FXPT15200	3.27	B
4	FXPT04200	1.07	A	16	FXPT16200	3.47	A
5	FXPT05200	1.27	B	17	FXPT17200	3.67	B
6	FXPT06200	1.47	A	18	FXPT18200	3.87	A
7	FXPT07200	1.67	B	19	FXPT19200	4.07	B
8	FXPT08200	1.87	A	20	FXPT20200	4.27	A
9	FXPT09200	2.07	B	21	FXPT21200	4.47	B
10	FXPT10200	2.27	A	22	FXPT22200	4.67	A
11	FXPT11200	2.47	B	23	FXPT23200	4.87	B
12	FXPT12200	2.67	A	24	FXPT24200	5.07	A
13	FXPT13200	2.87	B				



FOR RAPID PRICING, SAMPLES OR ASSISTANCE, **1-800-2-FAX-PCD**
FAX THE PCD EXPRESS HOTLINE: