

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2000



© COPYRIGHT 2000

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
GWDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	-	-	-	-
A1		SR10-0146-01	09APR2001	CM	KM

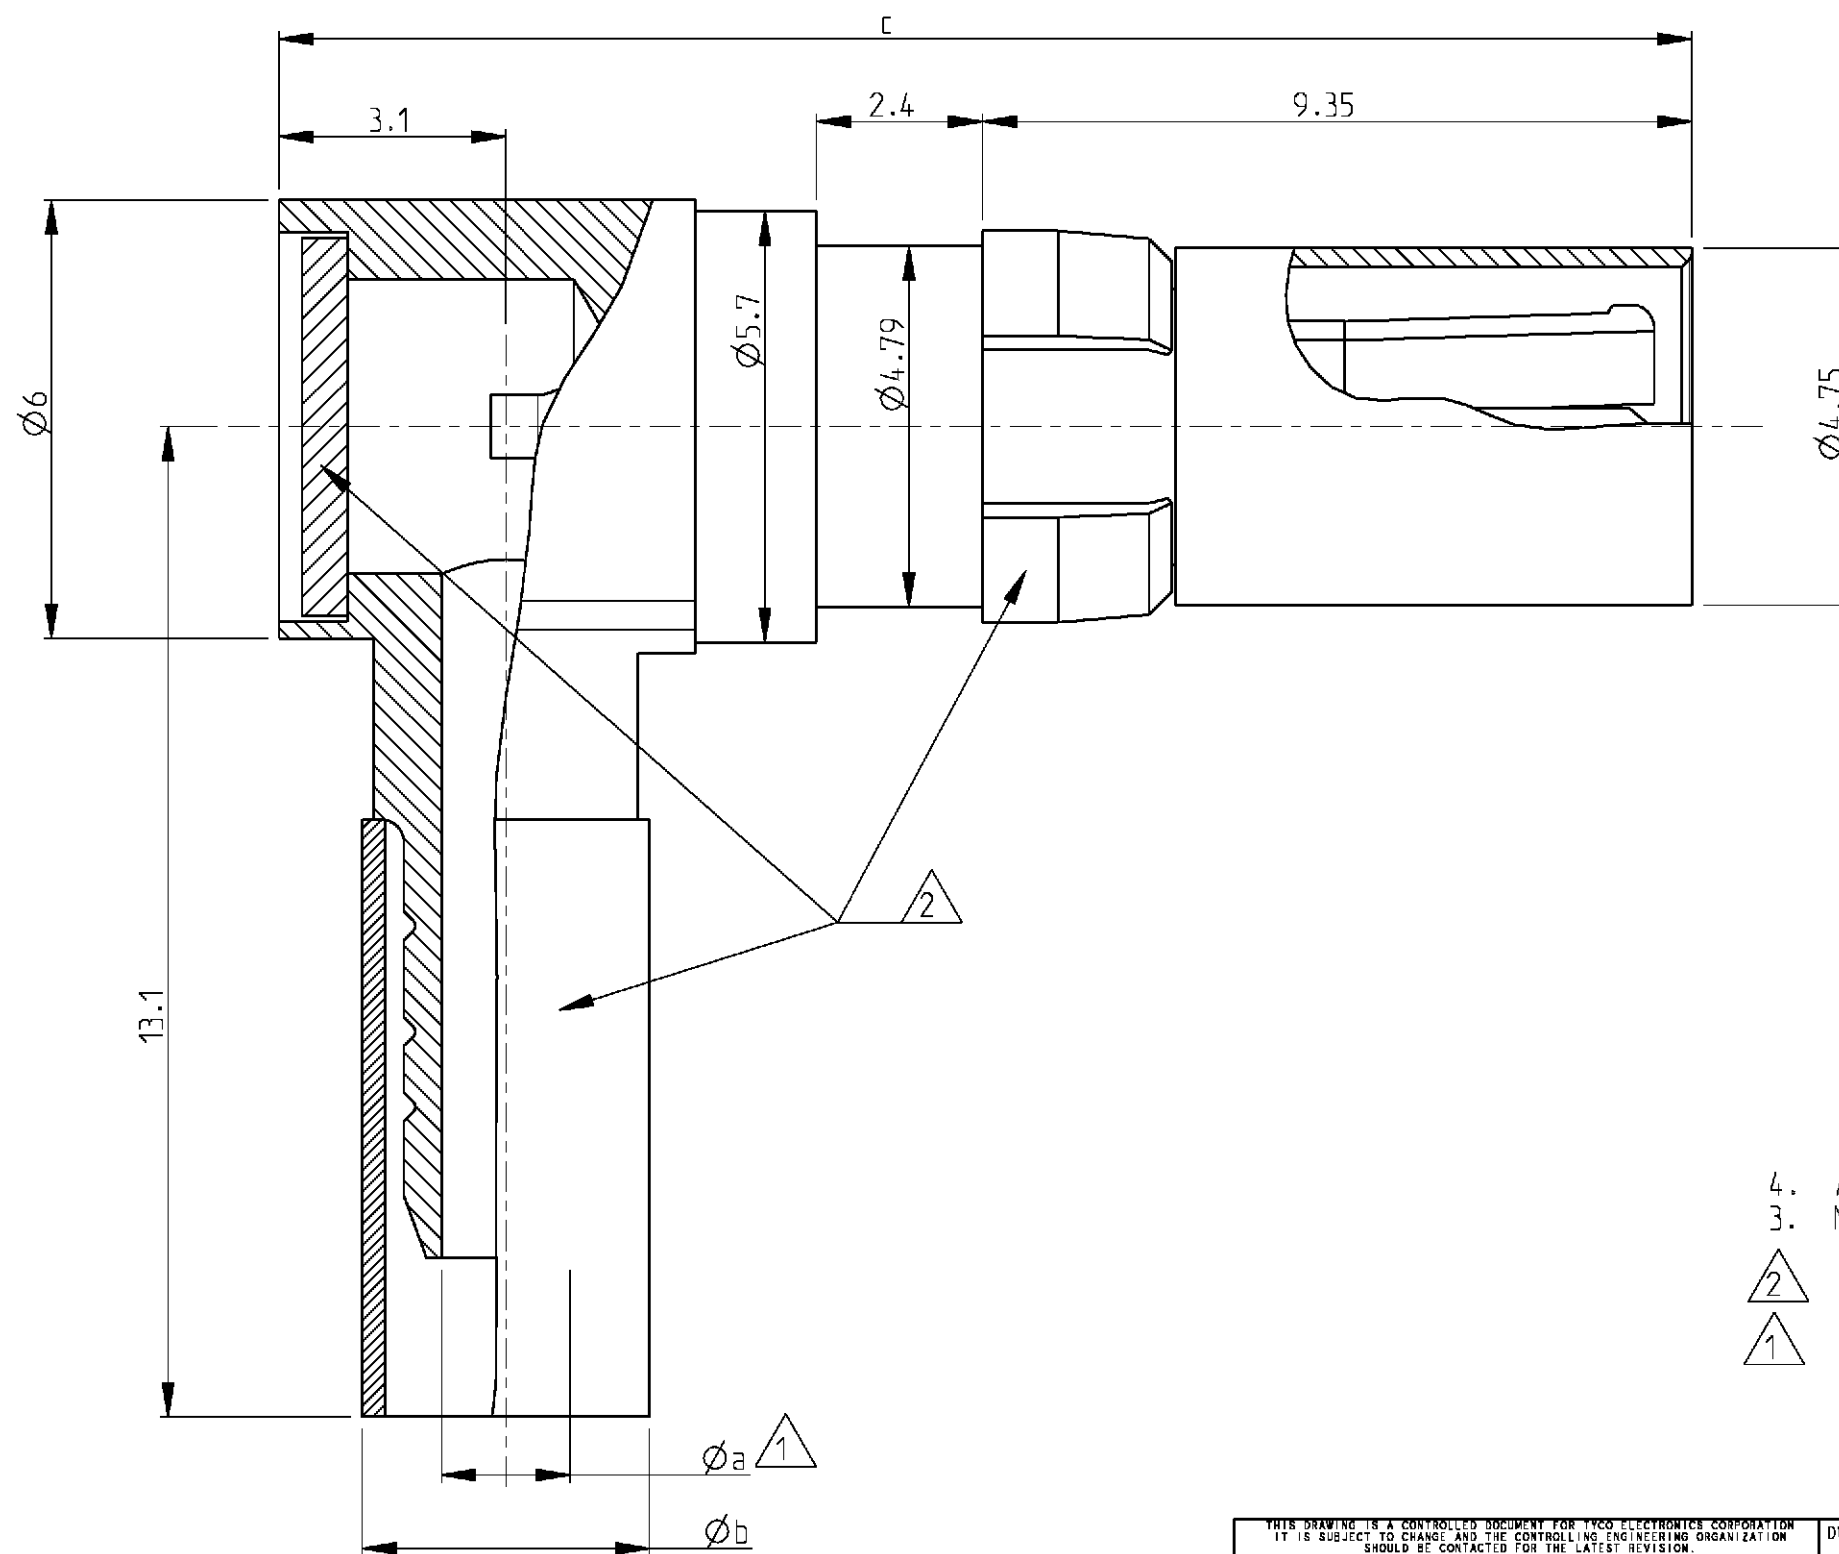

4. Application : female connectors DIN 41612 : type M
3. Mating face according to DIN 41626 Part 2



Supplied as loose part



Minimum Dimension


All dimensions are max. dimensions unless otherwise specified

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC $\pm$
	1 PLC ± 0.5
	2 PLC ± 0.13
	3 PLC ± 0.013
	4 PLC ± 0.0001
	ANGLES $\pm$
MATERIAL -	FINISH -

DWN	MOROB	04APR2001
CHK	MATTHEEUS	9APR2001
APVD	BOZZER	9APR2001
PRODUCT SPEC	108-71032	
APPLICATION SPEC	114-71014	
WEIGHT	-	

tyco Electronics		Tyco Electronics Oostkamp - Belgium	
NAME BULKHEAD PLUG 1.0/2.3 INSERT 50 Ohm			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1393668-4	-
SCALE 10/1		SHEET 1 OF 2	REV A1




LOC	DIST	REVISIONS				
GW	-	P	LTR	DESCRIPTION	DATE	APVD

V23601-A556-E71A	1393668-9	RG316 B/U RG174 A/U	1.7	3.85	22.3	Dielectric	PTFE	
						Outer Con.	Cu Be	1µm Au min in contact area
						Center Con.	Brass	1µm Au min in contact area
V23601-A556-E71	1393668-8	RG316 B/U RG174 A/U	1.7	3.85	22.3	Dielectric	PTFE	
						Outer Con.	Cu Be	1µm Au min in contact area
						Center Con.	Brass	1µm Au min in contact area
V23601-A502-E73	1393668-7	L910/9 L910/19 Flex Cable 0.4/1.6	1.7	4.3	18.7	Dielectric	PTFE	
						Outer Con.	Cu Be	1µm Au min in contact area
						Center Con.	Brass	1µm Au min in contact area
V23601-A502-E71A	1393668-5	RG316 B/U RG174 A/U	1.7	3.85	18.7	Dielectric	PTFE	
						Outer Con.	Cu Be	1µm Au min in contact area
						Center Con.	Brass	1µm Au min in contact area
V23601-A502-E71	1393668-4	RG316 B/U RG174 A/U	1.7	3.85	18.7	Dielectric	PTFE	
						Outer Con.	Cu Be	1µm Au min in contact area
						Center Con.	Brass	1µm Au min in contact area
Old Nr	Tyco Nr	Cable Type	Dim a	Dim b	Dim c	Description	Material	Plating

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±0.5
2 PLC ±0.13
3 PLC ±0.013
4 PLC ±0.0001
ANGLES ±

MATERIAL -

FINISH -

DWN MOROBE 4 APR 2001
CHK MATTHEEUS 9 APR 2001
APVD BOZZER 9 APR 2001
PRODUCT SPEC 108-71032
APPLICATION SPEC 114-71014
WEIGHT -

tyco
Electronics

Tyco Electronics
Oostkamp - Belgium

NAME
BULKHEAD PLUG
1.0/2.3 INSERT 50 Ohm
-

SIZE A3 CAGE CODE 00779 DRAWING NO C-1393668-4 RESTRICTED TO -

RESTRICTED CUSTOMER

SCALE 10/1 SHEET 2 OF 2 REV A1

AMP 1470-19 REV 31MAR2000