

ONE HOLE HYLUG™ FLEX CONDUCTOR STANDARD BARREL LEAD PLATED

TYPE YAG-L-TC-LD

UL Listed 90° C,
600 Volts to 35KV ◆

C-32

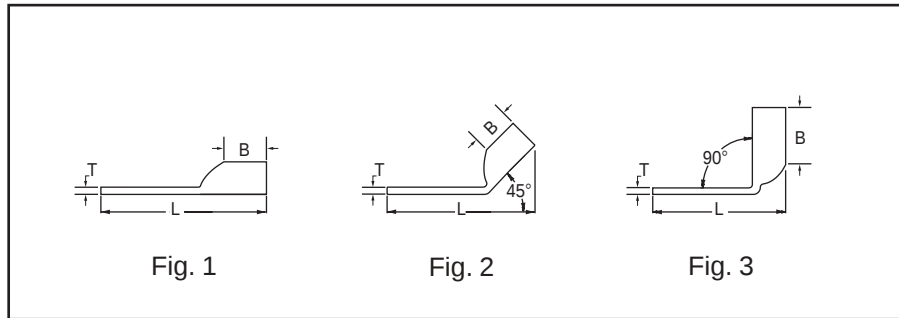
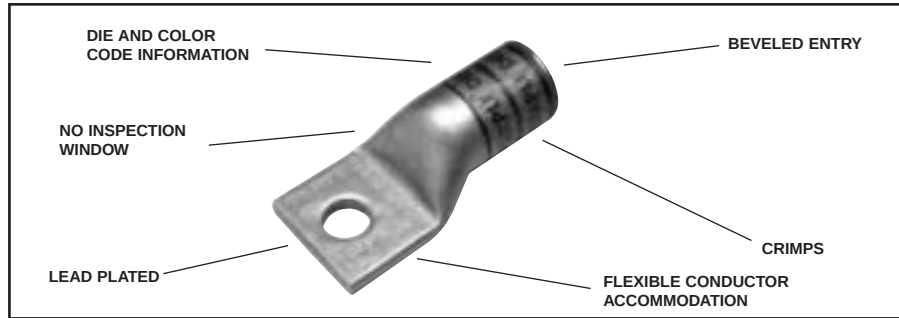


Fig. 1

Fig. 2

Fig. 3

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			▲ Installation Tooling						Wire Strip Length
		AWG	*** MM ²			(B)	(T)	(L)	Dieless (# of crimps)	Mechanical MD6, OUR840, MD7-34R	Hydraulic		Color Code	Die Index	
											BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750			
YAG18TC516LD	1	22-18 AWG		5/16"	.52"	.25"	.06"	1.42"	MR20 (1)				—	—	1/4"
YAG8CLTC10LD	1	37/24	**	# 10	.41"	.44"	.08"	1.19"	MY29-11 (1) Y2MR (1) Y1MR (1)	W8CVT (1) W8CRT (1) X8CRT (1)	W8CVT (1) W8CRT (1) X8CRT (1)	U8CRT (1)	Red	49	7/16"
YAG8CLTC10LD45	2							1.20"							
YAG8CLTC10LD90	3							.74"							
YAG8CLTC14LD	1			1/4"	.44"	.44"	.08"	1.32"							
YAG8CLTC14LD45	2							1.31"							
YAG8CLTC14LD90	3							.86"							
YAG8CLTC516LD	1			5/16"	.52"	.44"	.06"	1.38"							
YAG8CLTC516LD45	2							1.34"							
YAG8CLTC516LD90	3							.92"							
YAG8CLTC38LD	1			3/8"	.58"	.44"	.06"	1.51"							
YAG8CLTC38LD45	2							1.45"							
YAG8CLTC38LD90	3							1.04"							
YAG8CLTC12LD	1	1/2"	.71"	.44"	.05"	1.76"									
YAG8CLTC12LD45	2					1.67"									
YAG8CLTC12LD90	3					1.28"									
YAG6CLTC10LD	1	61/24	**	# 10	.41"	.50"	.08"	1.30"	Y1MR (1) MY29-11 (1) Y2MR (1) Y644M (1)	W5CVT (1) W5CRT (1) X5CRT (1)	W5CVT (1) W5CRT (1) X5CRT (1)	U5CRT (1)	Blue	7	1/2"
YAG6CLTC10LD45	2							1.26"							
YAG6CLTC10LD90	3							.76"							
YAG6CLTC14LD	1			1/4"	.48"	.50"	.08"	1.43"							
YAG6CLTC14LD45	2							1.39"							
YAG6CLTC14LD90	3							.88"							
YAG6CLTC516LD	1			5/16"	.52"	.50"	.07"	1.49"							
YAG6CLTC516LD45	2							1.44"							
YAG6CLTC516LD90	3							.94"							
YAG6CLTC38LD	1			3/8"	.58"	.50"	.06"	1.61"							
YAG6CLTC38LD45	2							1.54"							
YAG6CLTC38LD90	3							1.06"							
YAG6CLTC12LD	1	1/2"	.75"	.50"	.12"	1.86"									
YAG6CLTC12LD45	2					1.92"									
YAG6CLTC12LD90	3					1.34"									

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™

** The MM² conductor size referenced here is for both Class 2 and Class 5 conductor.

*** The MM² conductor sizes listed are the recommendations for Class 5 conductor.

▲ See tooling section of this catalog for complete tool and die listings.

† Alternate Tooling includes Y8MRB-1, MY29-11

◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ FLEX CONDUCTOR STANDARD BARREL LEAD PLATED (Continued)




Fig. 1




Fig. 2




Fig. 3

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions		▲ Installation Tooling						Wire Strip Length		
		AWG	*** MM²			Dieless (# of crimps)	Mechanical MD6, OUR840, MD7-34R	Hydraulic BCT500HS, Y500CTHS		Y35, Y39, Y750, Y46*, PAT750	Color Code	Die Index				
YAG4CLTC10LD	1	#4 WELD	91/24 - 105/24	# 10	.55"	.50"	.09"	Y1MR (2) MY29-11 (1) Y2MR (2) Y644M (1)	W4CVT (1) W4CRT (1) X4CRT (1)	W4CVT (1) W4CRT (1) X4CRT (1)	U4CRT (1)	Gray	8	1/2"		
YAG4CLTC10LD45	2														1.33"	
YAG4CLTC10LD90	3														.79"	
YAG4CLNT10LD	1			# 10	.41"	.50"	.09"								1.36"	
YAG4CLNT10LD45	2														1.33"	
YAG4CLNT10LD90	3														.79"	
YAG4CLTC14LD	1			1/4"	.55"	.50"	.09"								1.48"	
YAG4CLTC14LD45	2														1.46"	
YAG4CLTC14LD90	3														.92"	
YAG4CLTC516LD	1			4 AWG	5/16"	.55"	.50"								.08"	1.55"
YAG4CLTC516LD45	2															1.52"
YAG4CLTC516LD90	3															.98"
YAG4CLTC38LD	1			3/8"	.58"	.50"	.08"								1.67"	
YAG4CLTC38LD45	2														1.63"	
YAG4CLTC38LD90	3														1.10"	
YAG4CLTC12LD	1	1/2"	.71"	.50"	.07"	1.92"										
YAG4CLTC12LD45	2					1.84"										
YAG4CLTC12LD90	3					1.34"										
YAG2CLTC10LD	1	#2 WELD	125/24	#10	.68"	.63"	.10"	Y1MR (2) MY29-11 (1) Y2MR (2) Y644M (1)	W2CRT (1) W2CVT (1) X2CRT (1)	W2CRT (1) W2CVT (1) X2CRT (1)	U2CRT (1)	Brown	10	11/16"		
YAG2CLTC10LD45	2														1.47"	
YAG2CLTC10LD90	3														.84"	
YAG2CLTC14LD	1			1/4"	.68"	.63"	.10"								1.64"	
YAG2CLTC14LD45	2														1.60"	
YAG2CLTC14LD90	3														.97"	
YAG2CLTC516LD	1			5/16"	.68"	.63"	.10"								1.70"	
YAG2CLTC516LD45	2														1.66"	
YAG2CLTC516LD90	3														1.03"	
YAG2CLTC38LD	1			3/8"	.68"	.63"	.10"								1.83"	
YAG2CLTC38LD45	2														1.78"	
YAG2CLTC38LD90	3														1.15"	
YAG2CLTC12LD	1			1/2"	.77"	.63"	.10"								2.12"	
YAG2CLTC12LD45	2														2.03"	
YAG2CLTC12LD90	3														1.40"	
YAG1CLTC10LD	1	#1 AWG	175/24 - #1 WELD	# 10	.75"	.69"	.12"	MY29-11 (1) Y644M (1)	W1CVT (1) W1CRT-1 (1) X1CRT-1 (1)	W1CVT (1) W1CRT-1 (1) X1CRT-1 (1)	U1CRT-1 (1)	Green	11	11/16"		
YAG1CLTC10LD45	2														1.61"	
YAG1CLTC10LD90	3														1.57"	
YAG1CLTC14LD	1			1/4"	.83"	.69"	.12"								.88"	
YAG1CLTC14LD45	2														1.73"	
YAG1CLTC14LD90	3														1.70"	
YAG1CLTC516LD	1			5/16"	.75"	.69"	.12"								1.00"	
YAG1CLTC516LD45	2														1.80"	
YAG1CLTC516LD90	3														1.76"	
YAG1CLTC38LD	1			3/8"	.75"	.69"	.12"								1.07"	
YAG1CLTC38LD45	2														1.92"	
YAG1CLTC38LD90	3														1.89"	
YAG1CLTC12LD	1			1/2"	.75"	.69"	.12"								1.19"	
YAG1CLTC12LD45	2														2.17"	
YAG1CLTC12LD90	3														2.14"	

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™

*** The MM² conductor sizes listed are the recommendations for Class 5 conductor.

▲ See tooling section of this catalog for complete tool and die listings.

† Alternate Tooling includes Y8MRB-1, MY29-11

◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ FLEX CONDUCTOR STANDARD BARREL LEAD PLATED (Continued)




Fig. 1




Fig. 2




Fig. 3

C-34

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions		▲ Installation Tooling						Wire Strip Length	
		AWG	*** MM²			(B)	(T)	(L)	Dieless (# of crimps)	Mechanical	Hydraulic		Color Code		Die Index
										MD6, OUR840, MD7-34R	BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750			
YAG25LTC14LD	1	275/24	50	1/4"	.83"	.69"	.12"	MY29-11 (1) Y644M (1)	W25RT (2) W25VT (2) X25RT (2)	W25RT (2) W25VT (2) X25RT (2)	U25RT (1)	Pink	12	11/16"	
YAG25LTC14LD45	2														1.77"
YAG25LTC14LD90	3														1.73"
YAG25LTC516LD	1			1.03"											
YAG25LTC516LD45	2			1.84"											
YAG25LTC516LD90	3			1.79"											
YAG25LTC38LD	1			1.09"											
YAG25LTC38LD45	2			1.96"											
YAG25LTC38LD90	3			1.92"											
YAG25LTC12LD	1			1.22"											
YAG25LTC12LD45	2	325/24	70	# 10	.83"	.69"	.12"	MY29-11 (1) Y644M (1)	W26VT (2) W26RT (2) X26RT (2)	W26VT (2) W26RT (2) X26RT (2)	U26RT (1)	Black	13	13/16"	
YAG25LTC12LD90	3														2.21"
YAG26LTC10LD	1														2.17"
YAG26LTC10LD45	2			1.47"											
YAG26LTC10LD90	3			1.82"											
YAG26LTC14LD	1			1.75"											
YAG26LTC14LD45	2			.94"											
YAG26LTC14LD90	3			1.95"											
YAG26LTC516LD	1			1.87"											
YAG26LTC516LD45	2			1.07"											
YAG26LTC516LD90	3	450/24	95	1/4"	.93"	.81"	.13"	MY29-11 (1) Y644M (1)	W27VT (2) X27RT (3) W27RT (2)	W27VT (2) X27RT (3) W27RT (2)	U27RT (1)	Orange	14	1"	
YAG26LTC38LD	1														2.01"
YAG26LTC38LD45	2														1.93"
YAG26LTC38LD90	3			1.13"											
YAG26LTC12LD	1			2.13"											
YAG26LTC12LD45	2			2.06"											
YAG26LTC12LD90	3			1.26"											
YAG26LTC58LD	1			2.38"											
YAG26LTC58LD45	2			2.31"											
YAG26LTC58LD90	3			1.51"											
YAG27LTC10LD	1	3/0 AWG	95	#10	.93"	.81"	.13"	MY29-11 (1) Y644M (1)	W26VT (2) W26RT (2) X26RT (2)	W26VT (2) W26RT (2) X26RT (2)	U26RT (1)	Black	13	13/16"	
YAG27LTC10LD45	2														2.13"
YAG27LTC10LD90	3														2.06"
YAG27LTC14LD	1			1.26"											
YAG27LTC14LD45	2			2.38"											
YAG27LTC14LD90	3			2.31"											
YAG27LTC516LD	1			1.51"											
YAG27LTC516LD45	2			2.63"											
YAG27LTC516LD90	3			2.56"											
YAG27LTC38LD	1			1.76"											
YAG27LTC38LD45	2	3/0 WELD	95	1/4"	.93"	.81"	.14"	MY29-11 (1) Y644M (1)	W27VT (2) X27RT (3) W27RT (2)	W27VT (2) X27RT (3) W27RT (2)	U27RT (1)	Orange	14	1"	
YAG27LTC38LD90	3														2.89"
YAG27LTC12LD	1														2.75"
YAG27LTC12LD45	2			1.93"											
YAG27LTC12LD90	3			2.05"											
YAG27LTC14LD	1			1.93"											
YAG27LTC14LD45	2			.98"											
YAG27LTC14LD90	3			2.18"											
YAG27LTC516LD	1			2.06"											
YAG27LTC516LD45	2			1.10"											
YAG27LTC516LD90	3	3/0 AWG	95	5/16"	1.03	1.00"	.14"	MY29-11 (1) Y644M (1)	W27VT (2) X27RT (3) W27RT (2)	W27VT (2) X27RT (3) W27RT (2)	U27RT (1)	Orange	14	1"	
YAG27LTC38LD	1														2.24"
YAG27LTC38LD45	2														2.12"
YAG27LTC38LD90	3			1.17"											
YAG27LTC12LD	1			2.37"											
YAG27LTC12LD45	2			2.24"											
YAG27LTC12LD90	3			1.29"											
YAG27LTC14LD	1			2.62"											
YAG27LTC14LD45	2	2.49"													
YAG27LTC14LD90	3	1.54"													

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™

*** The MM² conductor sizes listed are the recommendations for Class 5 conductor.

▲ See tooling section of this catalog for complete tool and die listings.

† Alternate Tooling includes Y8MRB-1, MY29-11

◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ FLEX CONDUCTOR STANDARD BARREL LEAD PLATED (Continued)




Fig. 1




Fig. 2





Fig. 3

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling						Wire Strip Length
		AWG	*** MM²			Dimensions				Mechanical MD6, OUR840, MD7-34R	Hydraulic		Color Code	Die Index		
						(B)	(T)	(L)			BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750				
YAG28LTC14LD	1	550/24 4/0 WELD	** 120	1/4"	1.14"	1.03"	.15"	MY29-11 (1) Y644M (1)	W28VT (2) X28RT (3) W28RT (2)	W28VT (2) X28RT (3) W28RT (2)	U28RT (1)	Purple	15	1-1/16"		
YAG28LTC14LD45	2														2.26"	
YAG28LTC14LD90	3														2.13"	
YAG28LTC516LD	1			5/16"	1.14"	1.03"	.15"								2.32"	
YAG28LTC516LD45	2															2.19"
YAG28LTC516LD90	3															1.21"
YAG28LTC516N66LD	1			3/8"	1.14"	1.03"	.15"								2.64"	
YAG28LTC38LD	1															2.45"
YAG28LTC38LD45	2															2.32"
YAG28LTC38LD90	3			1/2"	1.14"	1.03"	.15"								1.33"	
YAG28LTC12LD	1															2.70"
YAG28LTC12LD45	2															2.57"
YAG28LTC12LD90	3	5/8"	1.14"	1.03"	.15"	1.58"										
YAG28LTC58LD	1						2.95"									
YAG28LTC58LD45	2						2.82"									
YAG28LTC58LD90	3	3/4"	1.14"	1.03"	.15"	1.83"										
YAG28LTC34LD	1						3.14"									
YAG28LTC34LD45	2						3.00"									
YAG28LTC34LD90	3	550/24 4/0 WELD		1/4"	1.14"	1.03"	.16"	Y644M (1)	W29VT (2) X29RT (4)	W29VT (2) X29RT (4) W29RT (2)	U29RT (1)	Yellow	16	1-1/16"		
YAG29LTC14LD	1														2.26"	
YAG29LTC14LD45	2														2.13"	
YAG29LTC14LD90	3			5/16"	1.14"	1.03"	.16"								1.14"	
YAG29LTC516LD	1															2.32"
YAG29LTC516LD45	2															2.19"
YAG29LTC516LD90	3			3/8"	1.14"	1.03"	.16"								1.21"	
YAG29LTC38LD	1															2.45"
YAG29LTC38LD45	2															2.32"
YAG29LTC38LD90	3			1/2"	1.14"	1.03"	.16"								1.33"	
YAG29LTC12LD	1															2.70"
YAG29LTC12LD45	2															2.57"
YAG29LTC12LD90	3	5/8"	1.14"	1.03"	.16"	1.58"										
YAG29LTC58LD	1						2.95"									
YAG29LTC58LD45	2						2.82"									
YAG29LTC58LD90	3	3/4"	1.14"	1.03"	.16"	1.83"										
YAG29LTC34LD	1						3.14"									
YAG29LTC34LD45	2						3.00"									
YAG29LTC34LD90	3	250 FLEX CLASS G - 259 STR. CLASS H - 427 STR.		5/16"	1.20"	1.03"	.16"		W29VT (2) X29RT (4)	W29VT (2) X29RT (4) W29RT (2)	U29RT (1)	Yellow	16	1-1/16"		
YAG30LTC516LD	1														2.34"	
YAG30LTC516LD45	2														2.25"	
YAG30LTC516LD90	3			3/8"	1.20"	1.03"	.16"								1.24"	
YAG30LTC38LD	1															2.47"
YAG30LTC38LD45	2															2.37"
YAG30LTC38LD90	3			1/2"	1.20"	1.03"	.16"								1.36"	
YAG30LTC12LD	1															2.72"
YAG30LTC12LD45	2															2.62"
YAG30LTC12LD90	3														1.61"	

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™
 ** The 120 MM² referenced here is for both Class 2 and Class 5 conductor.
 *** The MM² conductor sizes listed are the recommendations for Class 5 conductor.

▲ See tooling section of this catalog for complete tool and die listings.
 † Alternate Tooling includes Y8MRB-1, MY29-11
 ◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ FLEX CONDUCTOR STANDARD BARREL LEAD PLATED (Continued)

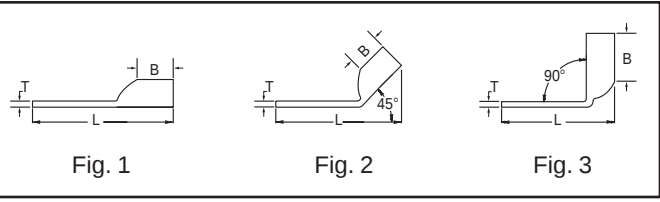

C-36

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling						Wire Strip Length
		AWG	*** MM²			(B)	(T)	(L)		Mechanical MD6, OUR840, MD7-34R	Hydraulic		Color Code	Die Index		
											BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750				
YAG30LTC58LD	1	250 FLEX CLASS G - 259 STR. CLASS H - 427 STR.		5/8"	1.20"	1.03"	.16"	2.97"	Y644M (1)	W29VT (2) X29RT (4)	W29VT (2) X29RT (4) W29RT (2)	U29RT (1)	Yellow	16	1-1/16"	
YAG30LTC58LD45	2							2.87"								
YAG30LTC58LD90	3			1.86"												
YAG30LTC34LD	1			3.16"												
YAG30LTC34LD45	2			3.06"												
YAG30LTC34LD90	3	637/259		3/4"	1.20"	1.03"	.16"	2.05"		W30VT (2)	W30VT (2) W30RT (2)	U30RT (2)			17	1-1/8"
YAG31LTC14LD	1							2.35"								
YAG31LTC14LD45	2			2.26"												
YAG31LTC14LD90	3			1.19"												
YAG31LTC516LD	1			2.41"												
YAG31LTC516LD45	2			2.32"												
YAG31LTC516LD90	3			1.27"												
YAG31LTC38LD	1			2.53"												
YAG31LTC38LD45	2			2.45"												
YAG31LTC38LD90	3			1.40"												
YAG31LTC12LD	1	250 FLEX CLASS I, K, M	150	1/2"	1.29"	1.06"	.18"	2.78"		W31VT (2)	W31VT (2) W31RT (2)	U31RT (2)	Red	18	1-1/4"	
YAG31LTC12LD45	2							2.70"								
YAG31LTC12LD90	3			1.65"												
YAG31LNT12LD	1			2.78"												
YAG31LNT12LD45	2			2.70"												
YAG31LNT12LD90	3			1.65"												
YAG31LTC58LD	1			3.03"												
YAG31LTC58LD45	2			2.95"												
YAG31LTC58LD90	3			1.90"												
YAG31LTC34LD	1			3.22"												
YAG31LTC34LD45	2	775/24-300 FLEX 313.1 kcmil	185	3/8"	1.40"	1.19"	.19"	3.13"		W32VT (2)	W32VT (2) W32RT (2)	U32RT (2)	Blue	19	1-5/16"	
YAG31LTC34LD90	3							2.09"								
YAG32LTC38LD	1			2.72"												
YAG32LTC38LD45	2			2.61"												
YAG32LTC38LD90	3			1.45"												
YAG32LTC12LD	1			2.97"												
YAG32LTC12LD45	2			2.86"												
YAG32LTC12LD90	3			1.70"												
YAG32LTC58LD	1			3.22"												
YAG32LTC58LD45	2			3.11"												
YAG32LTC58LD90	3	1.95"														
YAG34LTC516LD	1	925/24-350 FLEX 373.7 kcmil	240	5/16"	1.55"	1.27"	.23"	2.78"		W33VT (2)	W33VT (2) W33RT (2)	U33RT (2)				
YAG34LTC516LD45	2							2.71"								
YAG34LTC516LD90	3			1.41"												
YAG34LTC516N66LD	1			3.09"												
YAG34LNT516N66LD	1			3.09"												
YAG34LTC38LD	1			2.91"												
YAG34LTC38LD45	2			2.83"												
YAG34LTC38LD90	3			1.53"												
YAG34LTC12LD	1			3.16"												
YAG34LTC12LD45	2			3.08"												
YAG34LTC12LD90	3			1/2"	1.73"	1.27"	.23"	1.78"								

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™

*** The MM² conductor sizes listed are the recommendations for Class 5 conductor.

▲ See tooling section of this catalog for complete tool and die listings.

† Alternate Tooling includes Y8MRB-1, MY29-11

◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ FLEX CONDUCTOR STANDARD BARREL LEAD PLATED (Continued)



Fig. 1




Fig. 2




Fig. 3

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling						Wire Strip Length
		AWG	*** MM²			Hydraulic				Color Code	Die Index					
						MD6, OUR840, MD7-34R	BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750								
YAG34LTC58LD	1	925/24-350 FLEX 373.7 kcmil		5/8"	1.73"	1.27"	.23"	3.41"	Y644M (1)	W32VT (2)	W32VT (2) W32RT (2)	U32RT (2)	Blue	19	1-5/16"	
YAG34LTC58LD45	2															3.33"
YAG34LTC58LD90	3															2.03"
YAG36LTC12LD	1	1100/24-450 FLEX		1/2"	1.73"	1.38"	.27"	3.34"		-	-	U34RT (2)	Brown	20	1-3/8"	
YAG36LTC12LD45	2															3.30"
YAG36LTC12LD90	3															1.86"
YAG36LTC58LD	1	444.4 kcmil		5/8"	1.73"	1.38"	.27"	3.59"		-	-	U38XRT (2)	Pink	L99	1-7/16"	
YAG36LTC58LD45	2															3.55"
YAG36LTC58LD90	3															2.11"
YAG38LTC516LD	1	1325/24		5/16"	1.84"	1.45"	.27"	3.08"		-	-	U39RT (2)	Black	24	1-5/16"	
YAG38LTC516LD45	2															3.01"
YAG38LTC516LD90	3															1.52"
YAG38LTC38LD	1	500 FLEX		3/8"	1.84"	1.45"	.27"	3.39"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG38LTC38LD45	2															3.32"
YAG38LTC38LD90	3															1.83"
YAG38LTC12LD	1	535.3 kcmil		1/2"	1.84"	1.45"	.27"	3.46"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG38LTC12LD45	2															3.38"
YAG38LTC12LD90	3															1.90"
YAG38LTC58LD	1			5/8"	1.84"	1.45"	.27"	3.71"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG38LTC58LD45	2															3.63"
YAG38LTC58LD90	3															2.15"
YAG40LTC516LD	1	1600/24-646 kcmil		5/16"	1.96"	1.42"	.30"	3.11"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG40LTC516LD45	2															3.10"
YAG40LTC516LD90	3															1.59"
YAG40LTC38LD	1	650 FLEX		3/8"	1.96"	1.42"	.30"	3.42"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG40LTC38LD45	2															3.42"
YAG40LTC38LD90	3															1.91"
YAG40LTC12LD	1			1/2"	1.96"	1.42"	.30"	3.48"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG40LTC12LD45	2															3.47"
YAG40LTC12LD90	3															1.96"
YAG40LTC58LD	1			5/8"	1.96"	1.42"	.30"	3.73"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG40LTC58LD45	2															3.72"
YAG40LTC58LD90	3															2.21"
YAG44LTC12LD	1	1925/24		1/2"	2.18"	1.65"	.33"	3.85"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG44LTC12LD45	2															3.81"
YAG44LTC12LD90	3															2.07"
YAG44LTC58LD	1	777.7 kcmil		5/8"	2.18"	1.65"	.33"	4.10"		-	-	U44XRT (2)	Yellow	L115	1-5/8"	
YAG44LTC58LD45	2															4.06"
YAG44LTC58LD90	3															2.32"

C-37

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™

*** The MM² conductor sizes listed are the recommendations for Class 5 conductor.

▲ See tooling section of this catalog for complete tool and die listings.

† Alternate Tooling includes Y8MRB-1, MY29-11

◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.