


MODEL 072 750 kHz – 30 MHz TTL Oscillator

Surface Mount 32 Pad Leadless Chip Carrier

Frequency Range	Input Current @ 5.25 V mA	Rise & Fall Time (.8 & 2.0 V) ns	Duty Cycle @ 1.4 V	Unit Loads (max.)
750.0 kHz to 12.0 MHz	45	15	45 to 55	10 TTL
12.1 MHz to 30.0 MHz	30	5	40 to 60	10 TTL

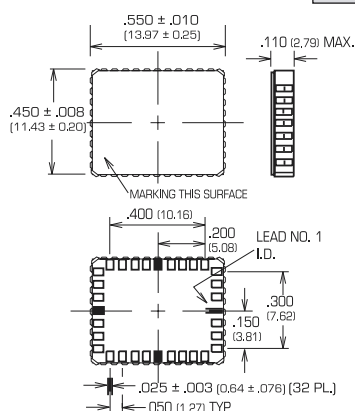


PIN CONNECTIONS

12, 16 – GND
8 – Output
26, 32 – VCC
All Others N/C

MODEL 717 375 kHz – 65 MHz TTL Oscillator

*8-Pin TO-5 Package
Generic Equivalent of MIL-PRF-55310/09
Optional Height 0.20" (5.08mm)*

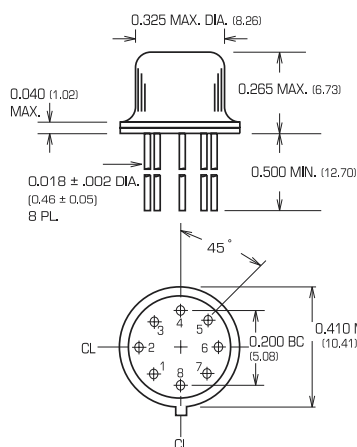

Frequency Range	Input Current @ 5.25 V mA	Rise & Fall Time (.8 & 2.0 V) ns	Duty Cycle @ 1.4 V	Unit Loads (max.)
375.0 kHz to 7.0 MHz	50	15	45 to 55	10 TTL
>7.0 MHz to 20.0 MHz	30	5	40 to 60	10 TTL
>20.0 MHz to 65.0 MHz	50	5	40 to 60	10 TTL

PIN CONNECTIONS

4 – GND/Case
5 – Output
8 – VCC
All Others N/C