
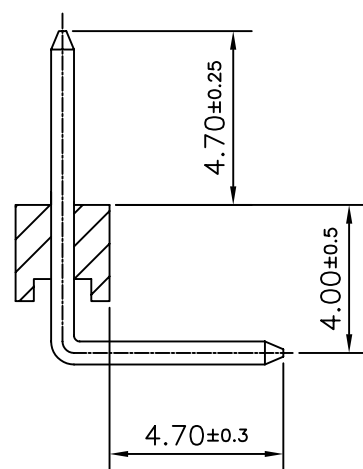
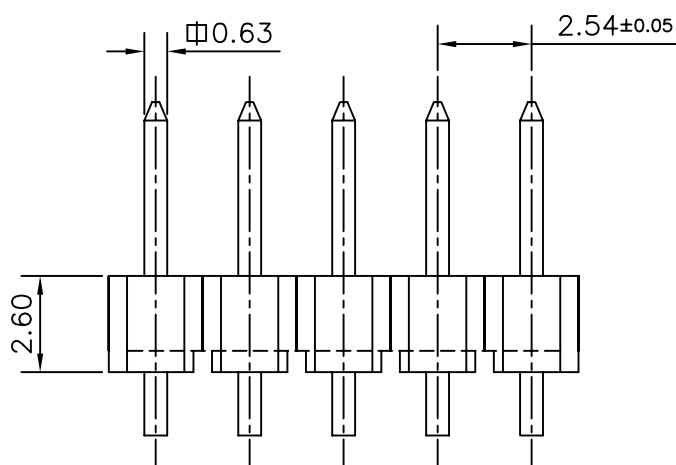


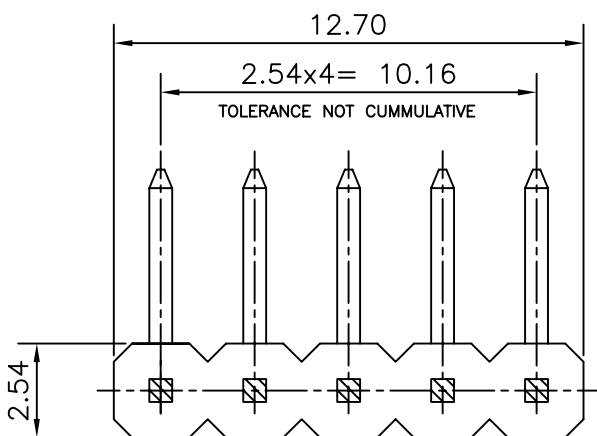

TECHNICAL SPECIFICATION

INSULATOR MATERIAL	SELF EXTINGUISHING THERMOPLASTIC (UL94 VO)
CONTACT MATERIAL	: COPPER ALLOY
CONTACT PLATING	: FULL GOLD FLASH
MAXIMUM VOLTAGE	: 500 V rms.
NOMINAL CURRENT	: 3A AT 20°C
INSULATION RESISTANCE	: ≥ 1000 MΩ
	: -40°C TO +100°C / 21 DAYS EXPOSURE TO-
	INDUSTRIAL ENVIRONMENT HUMIDITY TEST AS HE-14.

PART NO: 8614-00-05-1-LO-10-690-XX

LF :-LEAD FREE

Notes:

1, THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

mat'l. code SEE SPEC ABOVE				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family 8614			
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM 	title 05 PIN OPEN HEADER (SINGLE ROW ANGLED SPILL)			
B	106-0116	AB	2006-07-20	angles	linear					
				0°±1°						
				dr	ELIAS.C.T	2002-02-22	dwg no C-8614-0123			
				enr	ELIAS.C.T	2002-02-22				
				chr	ALEX BABU	2006-07-20				
				app	BIJU K PAUL	2006-07-20				
sheet	revision	A	B				type Product Customer Drawing			
index	sheet	1	1							