


- Open insulator.
- Sockets are XY stackable.
- Stamped and formed DIP sockets with a dual beam contact for positive retention (Phosphor Bronze).
- Stand-offs aid the cooling process and facilitate cleaning and soldering.

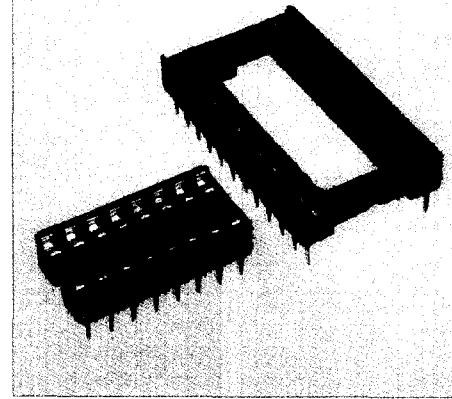

Total
no.
of
con-
tacts

Ordering Information

Low Cost DIP Sockets

	A	B	C	Fig. 1	
6	0.3	0.3	0.4		110-90-306-00-000
8	0.4	0.3	0.4		110-90-308-00-000
14	0.7	0.3	0.4		110-90-314-00-000
16	0.8	0.3	0.4		110-90-316-00-000
18	0.9	0.3	0.4		110-90-318-00-000
20	1.0	0.3	0.4		110-90-320-00-000
22	1.1	0.3	0.4		110-90-322-00-000
24	1.2	0.3	0.4		110-90-324-00-000
28	1.4	0.3	0.4		110-90-328-00-000
22	1.1	0.4	0.5		110-90-422-00-000
24	1.2	0.4	0.5		110-90-424-00-000
24	1.2	0.6	0.7		110-90-624-00-000
28	1.4	0.6	0.7		110-90-628-00-000
32	1.6	0.6	0.7		110-90-632-00-000
40	2.0	0.6	0.7		110-90-640-00-000
48	2.4	0.6	0.7		110-90-648-00-000
64	3.2	0.9	1.0		110-90-964-00-000

Fig. 2

Low Cost DIP Sockets with 0.1µF Capacitor

16	0.8	0.3	0.4		110-90-316-00-800
18	0.9	0.3	0.4		110-90-318-00-800

PLATING CODE

90

Contact

200µ" Sn