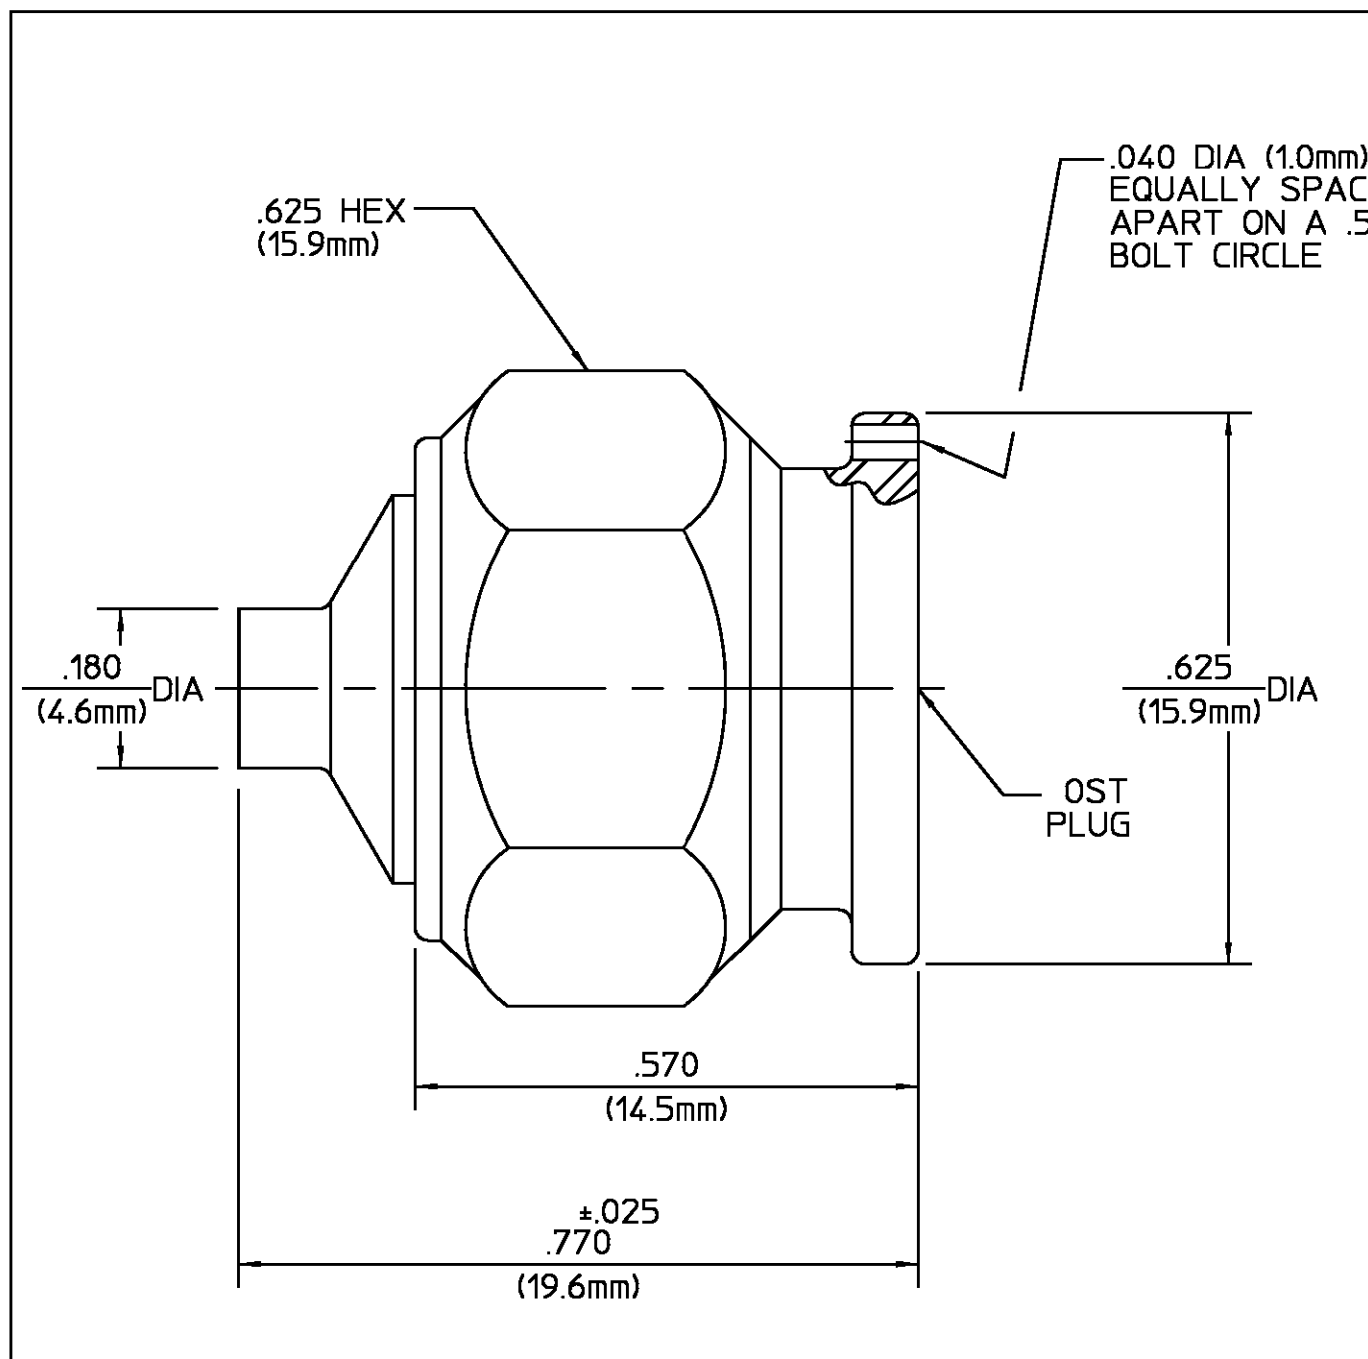


		REVISIONS			
		REV	DESCRIPTION	DATE	APPROVED
		01 ₀	RELEASED	5-10-79	GMH
		01 ₂	REDRAWN ON CAD PER ECN 88-0678	M.Y. 4-4-89	<i>[Signature]</i> RCM
		B	PER EC 0U20-0615-00	20SEP01	<i>[Signature]</i> 20SEP01
HOUSING		STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303		GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290	
COUPLING NUT		STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303		PASSIVATE PER ASTM A380	
DIELECTRIC		TFE FLUOROCARBON PER MIL-P-19468 AND FED SPEC L-P-403		N/A	
CENTER CONTACT		BRASS PER ASTM-B-16, HALF HARD		GOLD PLATE PER MIL-G-45204	
RETAINING RING		BERYLLIUM COPPER PER QQ-C-533		N/A	
GASKET		SILICONE RUBBER PER ZZ-R-765		N/A	
COMPONENT		MATERIAL		FINISH	
CABLE ENTRY DIAMETER MINIMUM		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON			
HOUSING		FRAC. DEC. ANGLES ± 1/64 ± .005 ± 1°			
CONTACT		These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.			
		DRAWN BY D M DATE 3-27-79			
		CHECKED BY RMF 5-3-79			
		APPD BY GMH 5-10-79			
		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599			
		TITLE 18 GHz OST CABLE PLUG DIRECT SOLDER ATTACH.			
		USE ASS'Y PROCEDURE			
		NO. AP. 37-001			
		SIZE B CODE IDENT NO. 26805 3701-7941-02 REV 01 ₂			
		SCALE 5:1 SHEET 1 OF 1			

NOTES:
1. DESIGNED FOR USE WITH
.141 SEMI-RIGID CABLE