


RICHMOND 8300 SERIES

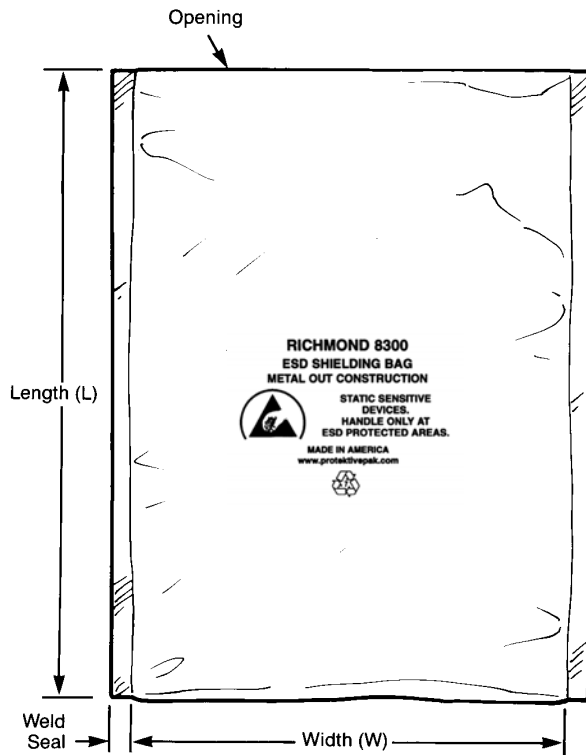

Side Weld Seals 3/8 in.

Item No.	Size (in.) W x L	Item No.	Size (in.) W x L
48500	4 x 4	48509	10 x 14
48501	4 x 6	48510	11 x 15
48502	5 x 8	48511	12 x 16
48503	6 x 8	48512	12 x 18
48504	6 x 10	48513	14 x 16
48505	8 x 8	48514	14 x 18
48506	8 x 10	48515	14 x 24
48507	8 x 12	48516	18 x 24
48508	10 x 12		

Packaged 100 per package

Specifications:

Electrical Properties	Typical Values
Surface Resistance:	
Outer Surface	<10 ¹¹ ohms
Aluminum Layer	<10 ² ohms
Inner Surface	<10 ¹¹ ohms
Static Shielding	<20 nJ
Charge Generation (nC/in ²)	Teflon: -0.03 Quartz: +0.10
Capacitance Probe (to dissipate 1 KV)	<30V

Physical Properties:

Bag Thickness:		
Polyester Layer	0.5 Mils Static Dissipative PET film	ASTM D-2103
Aluminum Layer	10-25 Angstroms	
Polyethylene Layer	2.5 Mils Static Dissipative PE film	ASTM D-2103
Total Thickness	3.0 to 3.1 Mils	ASTM D-2103
Light Transmission (%)	40% (Tobias)	ASTM D-1003
Seam Strength	Pass	ANSI/ESD S541
Tear Strength (lbs)	>25	ASTM D-1004
Puncture Resistance (lbs)	>10	ASTM D-2065
MVTR (gms / 100 in ² / 24 hrs, 100°F)	0.40	ASTM F-1249
Burst Strength (psi)	>50 psi	FTMS 101C, 2065.1
Heat Seal	>10 lbs/in.	375°F, 1/2 sec 60 psi
Abrasion Resistance	>30 cycles	Sutherland Abr. (.0000 Steel Wool)
Outgassing	Pass	ASTM E595
Non-corrosive	Pass	MIL-STD-3010, M3005

Chemical Properties

Corrosion	No effect on aluminum, copper, silver, Sn-Pb coated foil, stainless steel, low carbon steel
Polycarbonate Capability, No Amines N-Octanoic Acid	Yes Not present




Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades.

Protektive Pak's bags are recyclable

High Performance
Static Dissipative
Abrasion Resistant
Coating
Aluminum
Shielding Layer
Polyester Layer
Static Dissipative Inner
Polyethylene Layer



A fundamental ESD control principle (see ANSI/ESD S20.20 Foreword): ESD susceptible items should be transported and stored outside an Electrostatic protected Area enclosed in low charging, static shielding protective packaging.

The bag's material meets the performance specification requirements of ANSI/ESD S541. Bag is free of amines, N-octanoic acid, and heavy metals.



Made in the United States of America

RICHMOND 8300, TRANSPARENT STATIC SHIELDING BAG (METAL OUT)

PROTEKTIVE PAK

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578, FAX (909) 363-7331
www.ProtektivePak.com

DRAWING NUMBER
48500

DATE:
December
2012