

Terminations & Loads



Model 1428 Model 1435 High Power Coaxial Termination

dc to 1.5 GHz
dc to 5.0 GHz
150 Watts



Convection Cooled



Features

- Low SWR - Maximum SWR remains low through full frequency and power range.
- Rugged Construction - Quality connector with special high temperature support beads.

Specifications


NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: Model 1428: dc to 1.5 GHz
Model 1435: dc to 5.0 GHz

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 2	1.10
2 - 5	1.15

INTERMODULATION (Model 1435-X-LIM Only): IM3 (Reflected) = -100 dBc with two input signals @ 869 MHz and 891 MHz with an average power of +43 dBm each.

PHYSICAL DIMENSIONS:

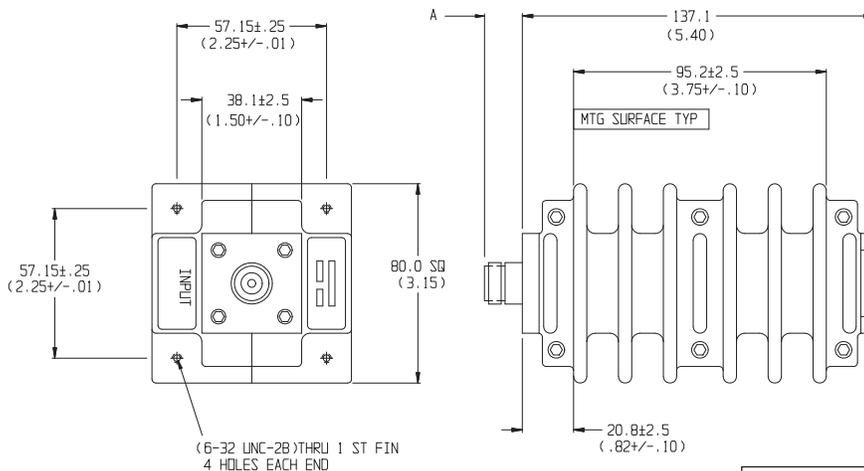

NOTE:

- All dimensions are given in mm (inches) and are maximum, unless otherwise specified.
- Unit available with RoHS compliant materials, specify when ordering.

Model #	DIM A	Connector Type
F1428, 1435-3	15.0 (0.59)	N female
M1428, 1435-4	22.9 (0.90)	N male

POWER RATING: 150 watts average (mounted horizontally assuming unobstructed air flow and natural convection around unit) @ 25°C ambient temperature, derated linearly to 15 watts @ 125°C. 10 kilowatts peak (5 μsec pulse width; 0.75% duty cycle).

TEMPERATURE RANGE: -55°C to +125°C

TEST DATA: SWR Testing performed across the frequency band. Test data is available at additional cost.

CONNECTOR: Type N connector per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connector.


Model 1428: Add M for male or F for female
Model 1435: Add -4 for male or -3 for female

CONSTRUCTION: Black, finned aluminum body, stainless steel connector; gold plated beryllium copper female contact or stainless steel male contact.

WEIGHT: 1,130 g (2 lbs, 8 oz)

MODEL NUMBER DESCRIPTION:

Example:

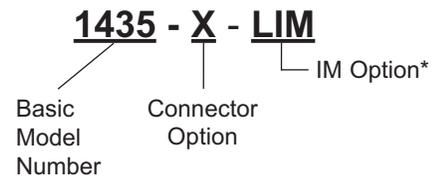

* Add -LIM to entire model number for Low Intermodulation option.