

Modupack


Micro-Sicma



12 way female module for 0.64 mm pre-loaded terminals

Features

- High density female module suitable to be integrated into a modular connector system
- Available in 12 position for 0.64 mm pre-loaded female terminals
- Pitch of 2.54 mm
- Female Modules delivered on reel
- Termination to flex by StarCrimp technology
- Mechanical polarisation at 180° in female Module Holder
- Hinge secondary lock with strain relief feature

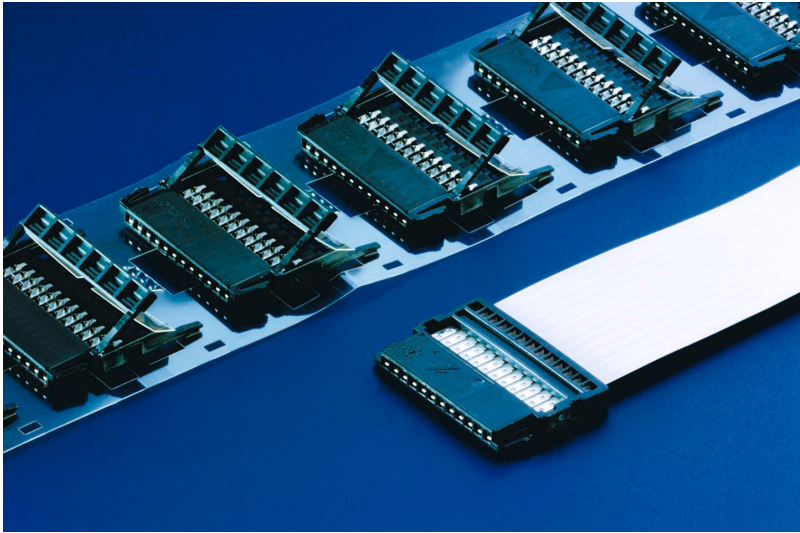

Performance characteristics

- Temperature range: from -40°C to +85°C
- Contact retention force: > 70 N
- Connector mating force: < 60 N

Construction

- Housing material: PBT
- Terminal material: CuSn

Tooling

- Manual Crimping Tool: Consult us
- Semi-Automatic Crimping Tool: Consult us
- Automatic Crimping Tool: Consult us

Part Numbers	No. of position	Terminal size	Colour
250 MC121F0001	12	0.64 mm pre-loaded	Black

Modupack

Micro-Sigma

12 way female module for 0.64 mm pre-loaded terminals

Dimensional characteristics

Notes :

