


- Series 310 and 350 interconnects are available in single and double row form.
- Single row interconnects having an even number of pins are now available with a left or right hand footprint.
- Headers (350 & 450) use MM# 3404 pins. (See page 170 for details)
- Sockets (310 & 410) use MM# 1005 receptacles and accept pin diameters from 0,38-0,64. (See page 135 for details)
- Insulators are high temp. thermoplastic.

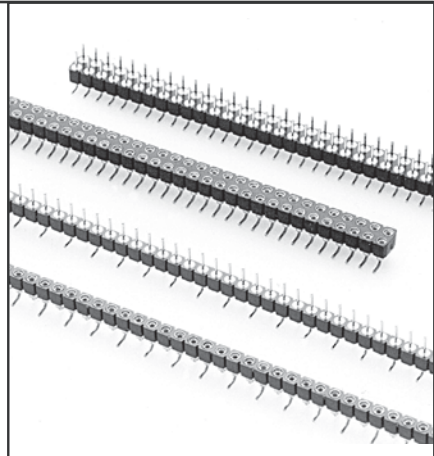

Ordering Information						
Fig. 1L	Single Row Header, Left Hand Footprint Odd or Even # of pins					
	350-XX-1__-00-106000 Specify # of pins → 02-64					
Fig. 1R	Single Row Header, Right Hand Footprint Even # of pins					
	350-XX-1__-00-107000 Specify even # of pins → 02-64					
Fig. 2	Double Row Header, Even # of pins					
	450-XX-2__-00-106000 Specify even # of pins → 02-72					
SPECIFY PLATING CODE XX=		10◇	90	40◇		
Pin Plating		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn		
Fig. 3L	Single Row Socket, Left Hand Footprint Odd or Even # of pins					
	310-XX-1__-41-105000 Specify # of pins → 02-64					
Fig. 3R	Single Row Socket, Right Hand Footprint Even # of pins					
	310-XX-1__-41-107000 Specify even # of pins → 02-64					
Fig. 4	Double Row Socket, Even # of pins					
	410-XX-2__-41-105000 Specify even # of pins → 02-72					
SPECIFY PLATING CODE XX=		13◇	93	99	43◇	44◇
Sleeve (Pin)		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	5,08µm Sn
Contact (Clip)		0,76µm Au	0,76µm Au	5,08µm Sn/Pb	0,76µm Au	5,08µm Sn