


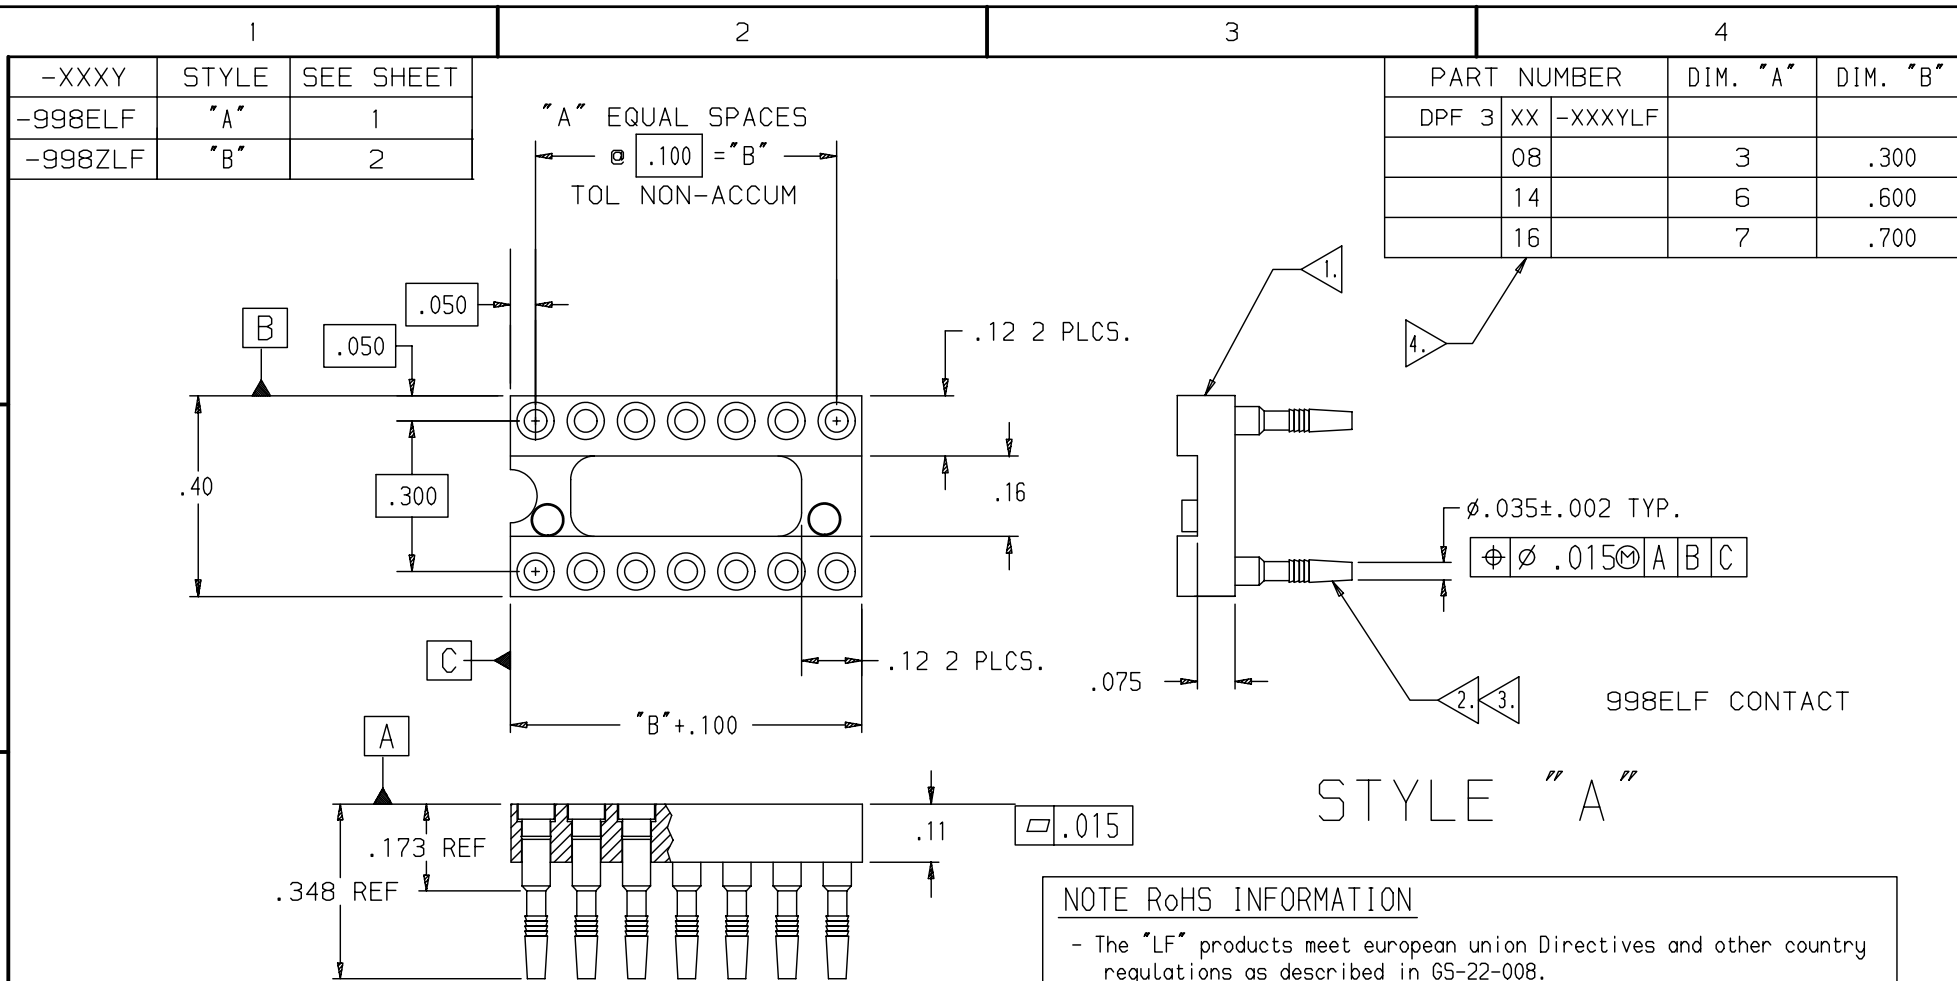

-XXXY	STYLE	SEE SHEET
-998ELF	"A"	1
-998ZLF	"B"	2

PART NUMBER			DIM. "A"	DIM. "B"
DPF 3	XX	-XXXLYF		
	08		3	.300
	14		6	.600
	16		7	.700

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in GS-22-008.
- Packaging spec: see GS-14-920

NOTES:

- INSULATOR MATERIAL:
GLASS FILLED POLYESTER (PCT),
RATED UL 94V-0, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD, PER ASTM B16.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172, PER ASTM B194.
- CONTACT PLATING:
OUTER SHELL: 80-120u" TIN/LEAD PER SAE AMS-P-81728
OUTER SHELL: 80-120u" TIN for LF VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: #4(30), 200u" TIN/LEAD PER SAE-AMS-P-81728
INNER CONTACT: #4(30), 200u" TIN for LF VERSION
OVER 50u" NICKEL PER QQ-N-290.
- NUMBER OF POSITIONS.

rev	ecn no	dr	date
H	LS07-0271	HLE	2007/10/29
J	LS07-0299	HLE	2007/11/20
K	LS08-0038	STG	2008/02/01
L	LS08-0051	HLE	2008/02/11
-	-	-	-
-	-	-	-
g	LS07-0141	HLE	2007/05/21

www.fciconnect.com			surface ISO 1302	tolerance std ISO 406 ISO 1101	projection A3	inch
			TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	D-WOLFORD	2000/02/14	ANGULAR	0.X	±0.1	size
Eng	A-VASBINDER	2000/02/14	LINEAR	0.XX	±0.1	Scale
Chr	A-VASBINDER	2000/02/14		0.XXX	±0.1	1:1
Appr	A-VASBINDER	2000/02/14	Product family	SOCKET		
			Spec ref RELEASED			ECN LS08-0051
FCI			PRESS FIT DIP SOCKET			Rev.
DPF			58707			L
catalog no			SEE TABLE			sheet 1 of 2

1

2

3

4

A

B

C

D




A

B

C


D

STYLE "B"

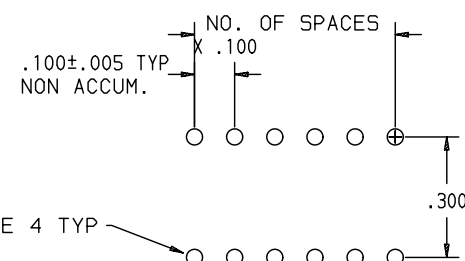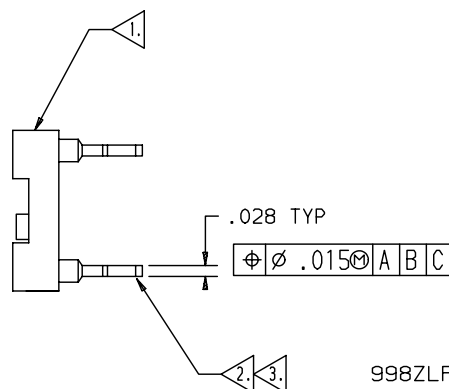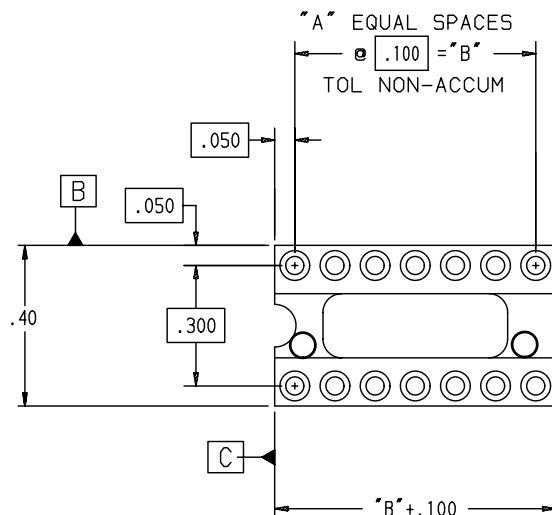

998ZLF CONTACT

THIS HOLE PATTERN APPLIES TO BOTH
STYLE A AND STYLE B CONTACTS.

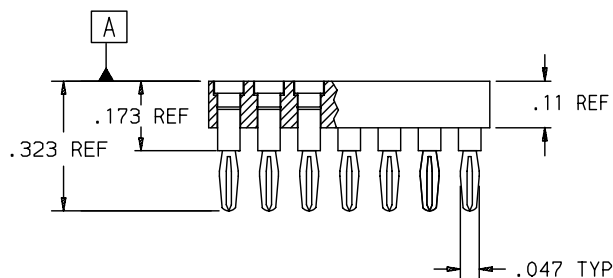

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in 65-22-008.
- Packaging spec: see 65-14-920

NOTES:

- INSULATOR MATERIAL:
GLASS FILLED POLYESTER (PCT),
RATED UL 94V-0, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: PHOSPHOR BRONZE.
INNER CONTACT: BERYLLIUM COPPER.
- CONTACT PLATING:
OUTER SHELL: 200u" TIN/LEAD PER SAE AMS-P-81728
OUTER SHELL: 200u" TIN for LEAD FREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
INNER CONTACT: #4(30), 200u" TIN/LEAD PER SAE-AMS-P-81728
INNER CONTACT: #4(30), 200u" TIN for LEADFREE VERSION
OVER 100u" NICKEL PER QQ-N-290.
- COMPLIANT PRESS FIT IN $\phi .040 \pm .003$ PLATED
HOLE, RECOMMENDED DRILL SIZE 1.15 MM
FOR .090 TO .130 THICK BOARD.

REV F - 2006-04-17

1

2

3

4

www.fciconnect.com

surface
ISO 1302tolerance std
ISO 406 ISO 1101projection
A3inch
Scale
1:1

TOLERANCES UNLESS OTHERWISE SPECIFIED

ANGULAR

LINEAR

0.X ± 0.1

0.XX ± 0.1

0.XXX ± 0.1

Product family

SOCKET

Spec ref RELEASED

Dr D-WOLFORD 2000/02/14

Eng A-VASBINDER 2000/02/14

Chr A-VASBINDER 2000/02/14

Appr A-VASBINDER 2000/02/14

rev

ecn no

dr

date

H LS07-0271 HLE 2007/10/29

J LS07-0299 HLE 2007/11/20

K LS08-0038 STG 2008/02/01

L LS08-0051 HLE 2008/02/11

- - - -

G LS07-0141 HLE 2007/05/21



PRESS FIT DIP SOCKET

DPF

catalog no

SEE TABLE

dwg no

58707

CUSTOMER

sheet 2 of 2

Rev.

L