


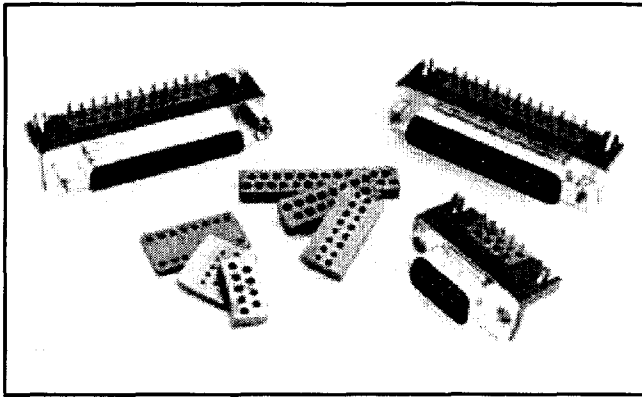


4400-[*]-[]**
.318" Standard density

4401-15-[]**
.350" High density

*Number of contacts; Options are:
9, 15, 25


**Gender; Options are:
M = Male
F = Female

4400 Series

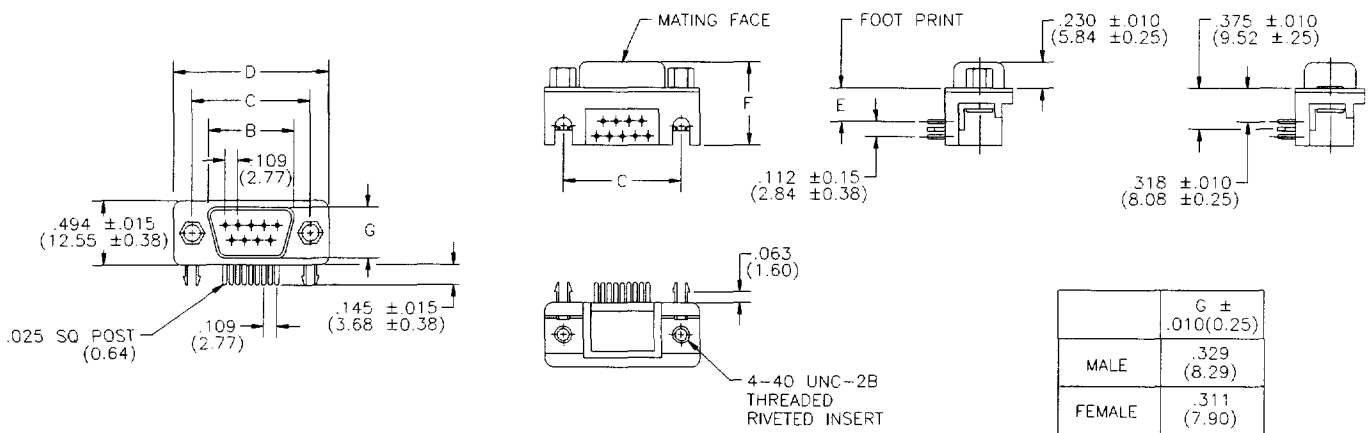


DIMENSION CHART					
MODEL	B ± .010(0.25)	C ± .015(0.38)	D ± .015(0.38)	E ± .010(0.25)	F ± .015(0.38)
4400-09F	.643 (16.33)	.984 (24.99)	1.216 (30.89)	.318 (8.08)	.748 (19.00)
4400-09M	.643 (16.33)	.984 (24.99)	1.216 (30.89)	.318 (8.08)	.748 (19.00)
4400-15F	.971 (24.66)	1.312 (33.32)	1.539 (39.10)	.318 (8.08)	.748 (19.00)
4400-15M	.971 (24.66)	1.312 (33.32)	1.539 (39.10)	.318 (8.08)	.748 (19.00)
4400-25F	1.511 (38.38)	1.852 (47.04)	2.090 (53.09)	.318 (8.08)	.748 (19.00)
4400-25M	1.511 (38.38)	1.852 (47.04)	2.090 (53.09)	.318 (8.08)	.748 (19.00)

4401 Series

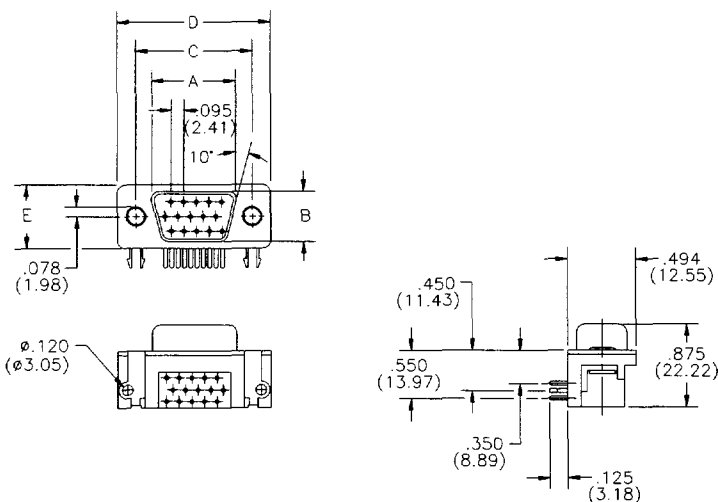

IMPEDANCE CHARACTERISTICS
SINGLE TURN (INSIDE HOLE)

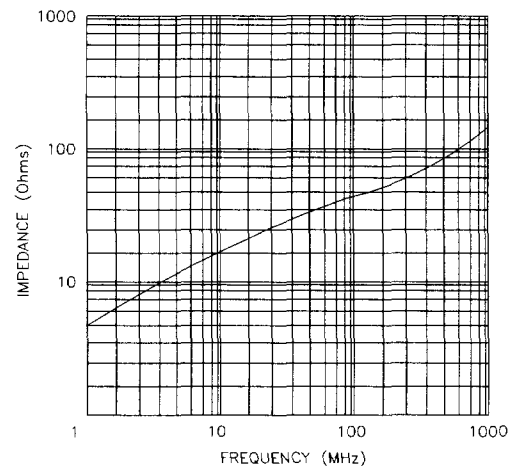

DIMENSION CHART					
MODEL	A ± .010(0.25)	B ± .010(0.25)	C ± .015(0.38)	D ± .015(0.38)	E ± .010(0.25)
4401-15F-H	.642 (16.30)	.311 (7.90)	.965 (24.50)	1.220 (31.00)	.350 (8.89)
4401-15M-H	.642 (16.30)	.311 (7.90)	.965 (24.50)	1.220 (31.00)	.350 (8.89)