

RF AMPLIFIER

MODEL *TM6654*

Available as: TM6654, 4 Pin TO-8 (T4)
 TN6654, 4 Pin Surface Mount (SM3)
 FP6654, 4 Pin Flatpack (FP4)
 BX6654, Connectorized Housing (H1)

Features

- High Gain: 29 dB Typical
- Low Noise Figure: <2.5 dB Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 500 MHz	5 - 500 MHz
Gain (dB)	29	27.5 Min.
Power @ 1 dB Comp. (dBm)	+11	+10.0 Min.
Reverse Isolation (dB)	-34.5	-33 Max.
VSWR In	<1.5:1	2.0:1 Max.
Out	<1.25:1	2.0:1 Max.
Noise figure (dB)	<2.5	3.0 Max.
Power Vdc	+5	+5
mA	40	45 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +39 dBm (Typ.)
 Second Order Two Tone Intercept Point +33 dBm (Typ.)
 Third Order Two Tone Intercept Point +23 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 10 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

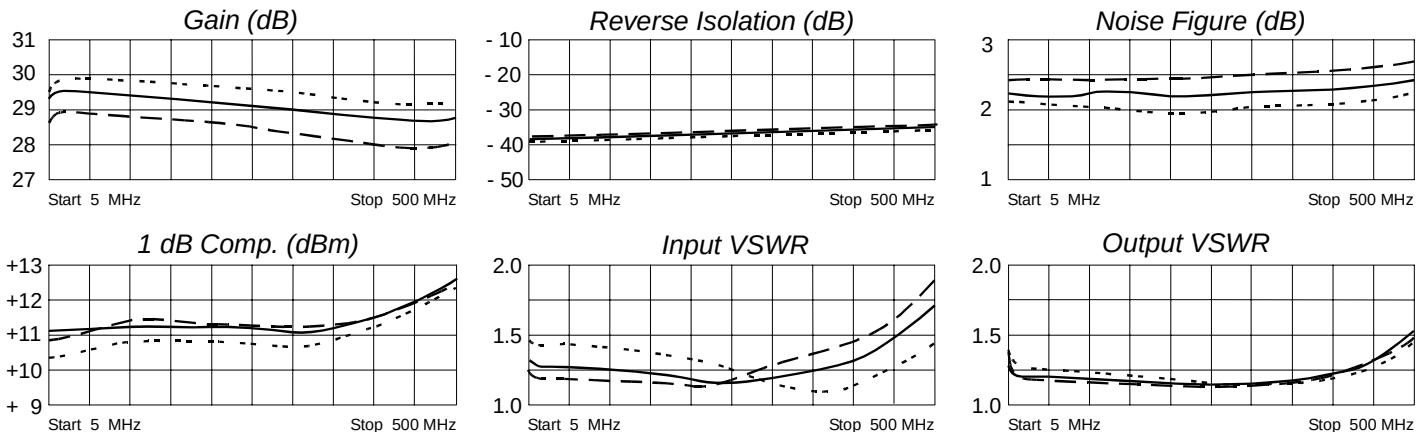

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.13	175	28.91	11	.01	13	.13	134
50	.12	161	29.63	- 21	.01	6	.09	176
100	.11	141	29.48	- 43	.01	- 3	.08	180
200	.09	92	28.91	- 83	.01	2	.07	166
300	.07	12	27.94	-131	.01	- 4	.07	142
400	.13	- 66	27.11	-175	.01	- 9	.09	111
500	.27	-115	27.29	137	.02	- 21	.21	77
								41



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 3/17/03

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001