

BBS-1200-W

1U High, Rackmount Server with Core™ 2 Duo, 3 COM, 2 USB, 180W ATX P/S, 3 Expansion Slot

Bare Bone



Features

- » 1U high, rackmount server design
- » Supports Intel® Core™ 2 Duo processor TDP ≤ 65W
- » VGA, dual Gigabit Ethernet port
- » 2 x 3.5" HDD space
- » 3 x PCI slot
- » 3 x COM port, 2 x USB2.0 port
- » 180W ATX power supply
- » 5 x 4cm ball bearing cooling fan

System

SBC

HS-7005

Backplane

HPCI-3SD

CPU

Intel® Core™ 2 Duo/Pentium® 4/Celeron® D processor (option)

System Chipset

Intel® Q965/ICH8-DO

System Memory

2 x 240-pin DIMM, DDR2 800MHz, Max. 4GB

Display Interface:

1 x D-SUB 15-pin

Ethernet Interface

2 x RJ-45 for Gigabit Ethernet

Storage

2 x 3.5" HDD space

Expansion Interface

3 x PCI slot

Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

H/W Status Monitor

Monitoring temperatures, voltages, and cooling fan status

Thermal System

5 x 4cm ball bearing cooling fan

Power

180W ATX power supply

Operating/Storage Temperature

0~50°C/-20~+70°C


Certification

FCC/CE Class A compliance


Dimensions

48.0(L) x 4.3(H) x 43.8(W) cm

I/O Interface

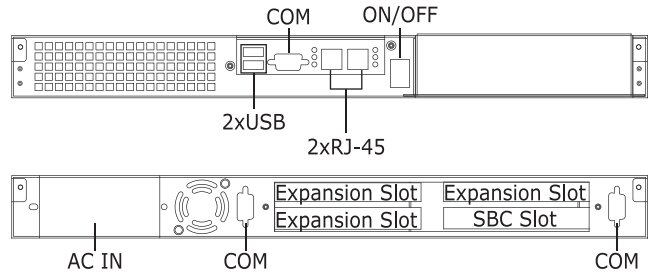

Dimensions (unit:cm)

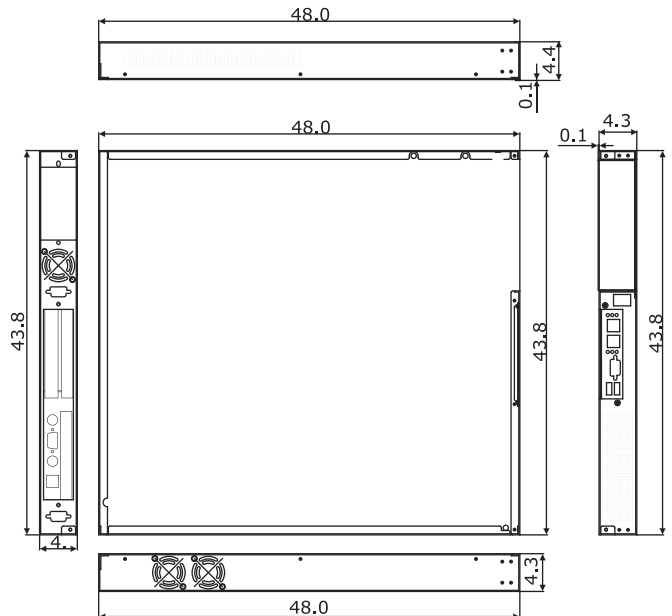

Ordering Information

BBS-1200-W

Rackmount Server w/HPCI-3SD, 3 COM, 2 USB, 180W ATX P/S, I/O Window for Dual LAN

Accessory Options

CPU, Memory Module, 3.5" HDD