

SPECIFICATIONS

RF Coaxial Connector

Mechanical

Gauge Retention Force (For resilient center contact): 0.27 N min
 Durability: 500 Cycles


Electrical

Nominal Impedance: 75Ω
 Frequency Range: 0-6GHz
 Insulation Resistance: 1000MΩ min.


Physical

Body: Copper alloy (C3604)
 Insulator: Teflon (PTFE)
 Socket: Beryllium Copper (C17300)

Plating: See "ORDERING INFORMATION"

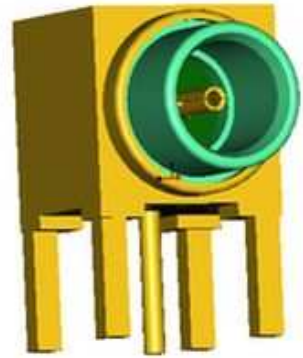

DRAWING

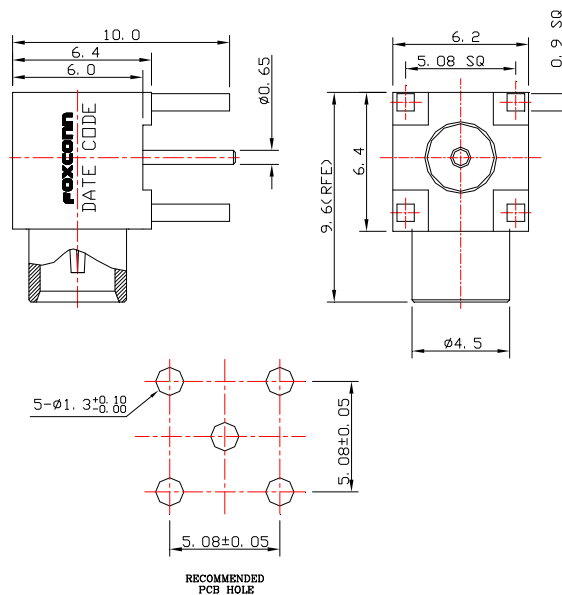

ORDERING INFORMATION

PRODUCT NO.:KF83111-1R01-4F

