



# UNISONIC TECHNOLOGIES CO., LTD

## UDT1605

Preliminary

**NPN EPITAXIAL SILICON TRANSISTOR**

### 120V NPN SILICON HIGH VOLTAGE DARLINGTON TRANSISTOR

#### DESCRIPTION



The UTC **UDT1605** is an NPN Darlington transistor. Utilizing UTC's advanced technology, **UDT1605** features ultra-high DC current gain and low collector-emitter saturation voltage, making it suitable for efficient driving functions.

The UTC **UDT1605** is suitable for a variety of efficient driving functions, etc.

#### FEATURES

- \* High breakdown voltage
- \* Low saturation voltage
- \* Ultra-high DC current gain

#### SYMBOL

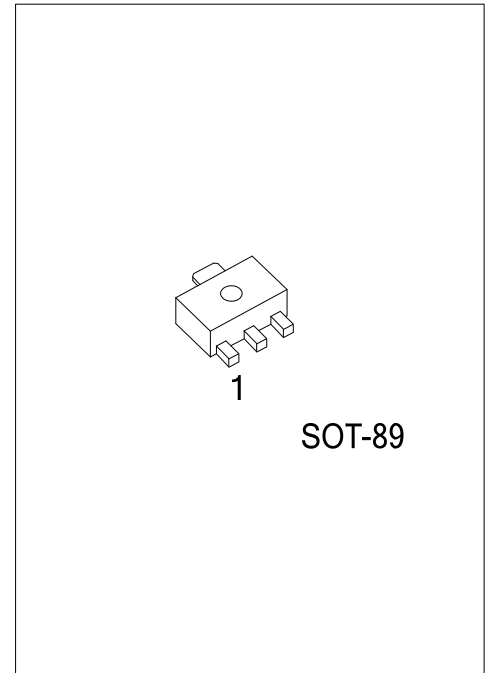

#### ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UDT1605L-AB3-R	UDT1605G-AB3-R	SOT-89	B	C	E	Tape Reel

UDT1605L-AB3-R	(1)Packing Type (2)Package Type (3)Halogen Free	(1) R: Tape Reel (2) AB3: SOT-89 (3) G: Halogen Free, L: Lead Free
----------------	---	--

### ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	$V_{CBO}$	140	V
Collector-Emitter Voltage	$V_{CEO}$	120	V
Emitter-Base Voltage	$V_{EBO}$	10	V
Peak Pulse Current	$I_{CM}$	4	A
Continuous Collector Current	$I_C$	1	A
Power Dissipation at $T_A=25^\circ\text{C}$ (Note 1)	$P_D$	1	W
Linear Derating Factor		8	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (Note 2)	$P_D$	2.8	W
Linear Derating Factor		22	mW/ $^\circ\text{C}$
Junction Temperature	$T_J$	-55~+150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55~+150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient (Note 1)	$R_{\theta JA}$	125	$^\circ\text{C}/\text{W}$
Junction to Ambient (Note 2)	$R_{\theta JA}$	45	$^\circ\text{C}/\text{W}$

Notes: 1. For a device surface mounted on 25mmx25mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions

2. For a device surface mounted on FR4 PCB measured at  $t \leq 5$  secs.

### ■ ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ , unless otherwise stated)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	$BV_{CBO}$	$I_C=100\mu\text{A}$	140			V
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	$I_C=10\text{mA}$ (Note 1)	120			V
Emitter-Base Breakdown Voltage	$BV_{EBO}$	$I_E=100\mu\text{A}$	10			V
Collector Cut-Off Current	$I_{CBO}$	$V_{CB}=10\text{V}$			100	nA
		$V_{CB}=120\text{V}$ , $T_{AMB}=100^\circ\text{C}$			10	$\mu\text{A}$
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB}=8\text{V}$			0.1	$\mu\text{A}$
Collector Emitter Cut-Off Current	$I_{CES}$	$V_{CES}=120\text{V}$			10	$\mu\text{A}$
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=250\text{mA}$ , $I_B=0.25\text{mA}$ (Note 1)			1	V
		$I_C=1\text{A}$ , $I_B=1\text{mA}$ (Note 1)			1.5	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=1\text{A}$ , $I_B=1\text{mA}$ (Note 1)			1.8	V
Base-Emitter Turn-On Voltage	$V_{BE(ON)}$	$I_C=1\text{A}$ , $V_{CE}=5\text{V}$ (Note 1)			1.7	V
DC Current Gain	$h_{FE}$	$I_C=50\text{mA}$ , $V_{CE}=5\text{V}$ (Note 1)	2K			
		$I_C=500\text{mA}$ , $V_{CE}=5\text{V}$ (Note 1)	5K			
		$I_C=1\text{A}$ , $V_{CE}=5\text{V}$ (Note 1)	2K	100K		
		$I_C=2\text{A}$ , $V_{CE}=5\text{V}$ (Note 1)	0.5			
Transition Frequency	$f_T$	$I_C=100\text{mA}$ , $V_{CE}=10\text{V}$ , $f=20\text{MHz}$	150			MHz
Input Capacitance	$C_{iBO}$	$V_{CB}=500\text{mV}$ , $f=1\text{MHz}$		90		pF
Output Capacitance	$C_{oBO}$	$V_{CB}=10\text{V}$ , $f=1\text{MHz}$		15		pF
Turn-On Time	$t_{(ON)}$	$I_C=500\text{mA}$ , $V_{CE}=10\text{V}$ $I_{B1}=I_{B2}=0.5\text{mA}$		0.5		$\mu\text{s}$
Turn-Off Time	$t_{(OFF)}$	$I_C=500\text{mA}$ , $V_{CE}=10\text{V}$ $I_{B1}=I_{B2}=0.5\text{mA}$		1.6		$\mu\text{s}$

Note: 1. Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle $\leq 2\%$

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.