



Patchcord, Fibre, Duplex, ST-ST, OM2

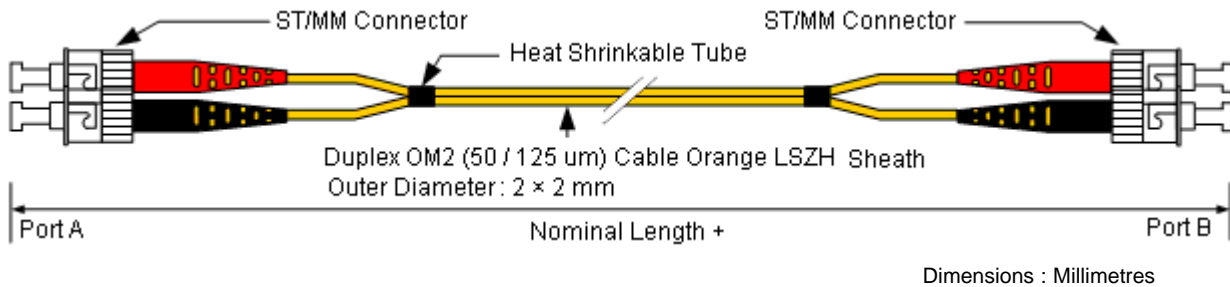

Specifications

		Port A	Port B
Connector Type		ST/MM	ST/MM
Connector Body	Material	Zn Alloy	Zn Alloy
	Colour	-	-
Connector Boot	Material	Plastic	Plastic
	Colour	Red and Black	Red and Black
Patchcord Length (Metre)		Customized	
Optical Cable	Fibre Type	OM2 50 / 125 um	
	Fibre Count	2	
	Outer Sheath	LSZH	
	Cable Outer Diameter	2 x 2 mm	
	Strength Member	DuPont Kevlar	
	Outer Sheath	LSZH	
Ferrule	Cable Colour	Orange	
	Diameter	2.5 mm	2.5 mm
	Type	MM	MM
	Material	ZrO2 (Ceramic)	ZrO2 (Ceramic)
Connection at Cable		Crimp	Crimp
Connection at Fibre		353ND Glue	353ND Glue
Connection at Adapter		Twist - Lock Bayonet	Twist - Lock Bayonet
Polishing		PC	PC
Insertion Loss (dB)		< 0.3	< 0.3

Patchcord, Fibre, Duplex, SC-ST, OM2

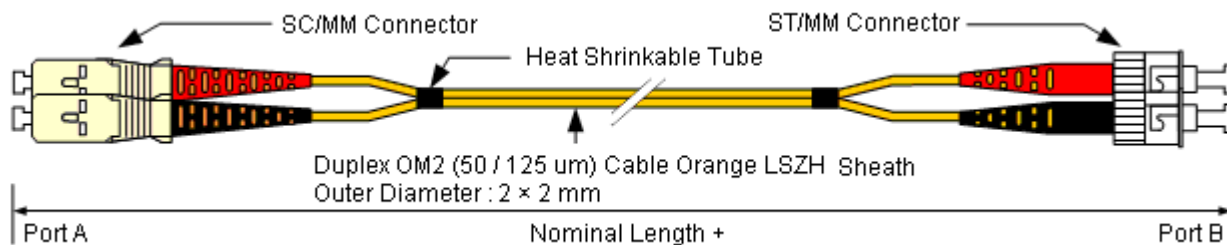


Dimensions : Millimetres

Specifications

		Port A	Port B
Connector Type		SC/MM	ST/MM
Connector Body	Material	Plastic	Zn Alloy
	Colour	Beige	-
Connector Boot	Material	Plastic	Plastic
	Colour	Red and Black	Red and Black
Patchcord Length (Metre)		Customized	
Optical Cable	Fibre Type	OM2 50 / 125 um	
	Fibre Count	2	
	Outer Sheath	LSZH	
	Cable Outer Diameter	2 x 2 mm	
	Strength Member	DuPont Kevlar	
	Outer Sheath	LSZH	
	Cable Colour	Orange	
Ferrule	Diameter	2.5 mm	2.5 mm
	Type	MM	MM
	Material	ZrO2 (Ceramic)	ZrO2 (Ceramic)
Connection at Cable		Crimp	Crimp
Connection at Fibre		353ND Glue	353ND Glue
Connection at Adapter		Plug - In	Twist - Lock Bayonet
Polishing		PC	PC
Insertion Loss (dB)		< 0.3	< 0.3


Patchcord, Fibre, Duplex, SC-SC, OM2

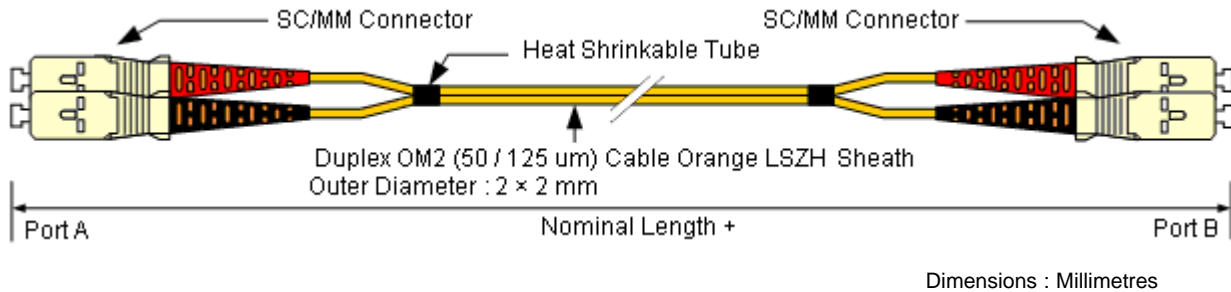

Specifications

		Port A	Port B
Connector Type		SC/MM	SC/MM
Connector Body	Material	Plastic	Plastic
	Colour	Beige	Beige
Connector Boot	Material	Plastic	Plastic
	Colour	Red and Black	Red and Black
Patchcord Length (Metre)		Customized	
Optical Cable	Fibre Type	OM2 50 / 125 um	
	Fibre Count	2	
	Outer Sheath	LSZH	
	Cable Outer Diameter	2 x 2 mm	
	Strength Member	DuPont Kevlar	
	Outer Sheath	LSZH	
	Cable Colour	Orange	
Ferrule	Diameter	2.5 mm	2.5 mm
	Type	MM	MM
	Material	ZrO2 (Ceramic)	ZrO2 (Ceramic)
Connection at Cable		Crimp	Crimp
Connection at Fibre		353ND Glue	353ND Glue
Connection at Adapter		Plug - In	Plug - In
Polishing		PC	PC
Insertion Loss (dB)		< 0.3	< 0.3


Patchcord, Fibre, Duplex, LC-LC, OM2

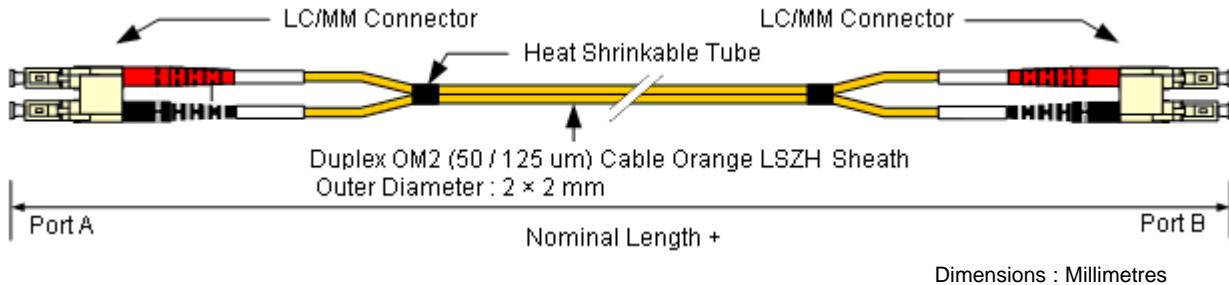

Specifications

		Port A	Port B
Connector Type		LC/MM	LC/MM
Connector Body	Material	Plastic	Plastic
	Colour	Beige	Beige
Connector Boot	Material	Plastic	Plastic
	Colour	Red and Black	Red and Black
Patchcord Length (Metre)		Customized	
Optical Cable	Fibre Type	OM2 50 / 125 um	
	Fibre Count	2	
	Outer Sheath	LSZH	
	Cable Outer Diameter	2 x 2 mm	
	Strength Member	DuPont Kevlar	
	Outer Sheath	LSZH	
Ferrule	Cable Colour	Orange	
	Diameter	1.25 mm	1.25 mm
	Type	MM	MM
Material		ZrO2 (Ceramic)	ZrO2 (Ceramic)
Connection at Cable		Crimp and Heat Shrinkable Tubing	Crimp and Heat Shrinkable Tubing
Connection at Fibre		353ND Glue	353ND Glue
Connection at Adapter		RJ45 Style	RJ45 Style
Polishing		PC	PC
Insertion Loss (dB)		< 0.3	< 0.3


Patchcord, Fibre, Duplex, LC-SC, OM2

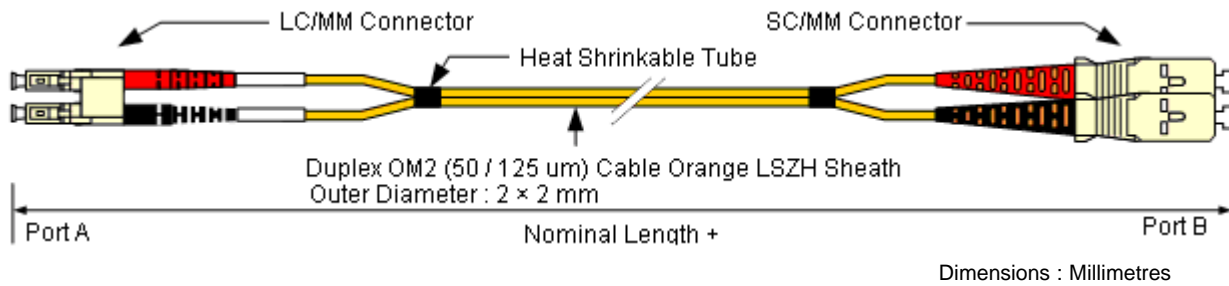

Specifications

		Port A	Port B
Connector Type		LC/MM	SC/MM
Connector Body	Material	Plastic	Plastic
	Colour	Beige	Beige
Connector Boot	Material	Plastic	Plastic
	Colour	Red and Black	Red and Black
Patchcord Length (Metre)		Customized	
Optical Cable	Fibre Type	OM2 50 / 125 um	
	Fibre Count	2	
	Outer Sheath	LSZH	
	Cable Outer Diameter	2 x 2 mm	
	Strength Member	DuPont Kevlar	
	Outer Sheath	LSZH	
	Cable Colour	Orange	
Ferrule	Diameter	1.25 mm	2.5 mm
	Type	MM	MM
	Material	ZrO2 (Ceramic)	ZrO2 (Ceramic)
Connection at Cable		Crimp and Heat Shrinkable Tubing	Crimp
Connection at Fibre		353ND Glue	353ND Glue
Connection at Adapter		RJ45 Style	Plug - In
Polishing		PC	PC
Insertion Loss (dB)		< 0.3	< 0.3

Patchcord, Fibre, Duplex, LC-ST, OM2

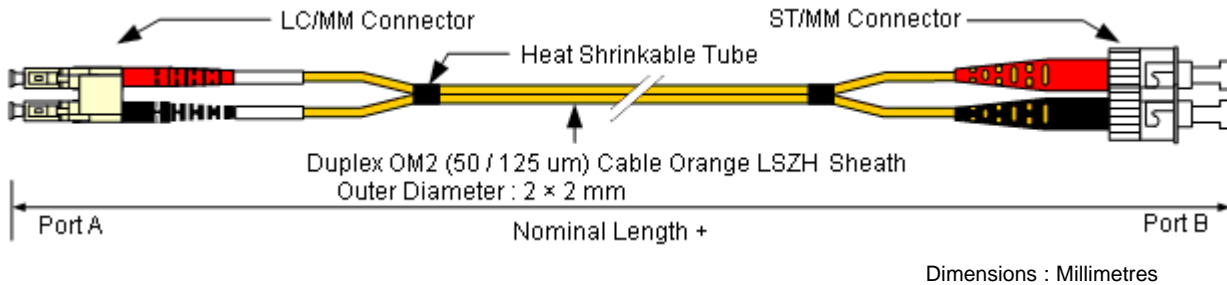

Specifications

		Port A	Port B
Connector Type		LC/MM	ST/MM
Connector Body	Material	Plastic	Zn Alloy
	Colour	Beige	-
Connector Boot	Material	Plastic	Plastic
	Colour	Red and Black	Red and Black
Patchcord Length (Metre)		Customized	
Optical Cable	Fibre Type	OM2 50 / 125 um	
	Fibre Count	2	
	Outer Sheath	LSZH	
	Cable Outer Diameter	2 x 2 mm	
	Strength Member	DuPont Kevlar	
	Outer Sheath	LSZH	
Ferrule	Cable Colour	Orange	
	Diameter	1.25 mm	2.5 mm
	Type	MM	MM
		ZrO2 (Ceramic)	ZrO2 (Ceramic)
Connection at Cable		Crimp and Heat Shrinkable Tubing	Crimp
Connection at Fibre		353ND Glue	353ND Glue
Connection at Adapter		RJ45 Style	Twist - Lock Bayonet
Polishing		PC	PC
Insertion Loss (dB)		< 0.3	< 0.3