

Microsemi Corp.

The diode experts

SANTA ANA, CA

SCOTTSDALE, AZ

For more information call:
(602) 941-6300

FEATURES

- DESIGNED TO PROTECT BIPOLAR AND MOS MICROPROCESSOR BASED SYSTEMS.
- VOLTAGE RANGE OF 5.0 TO 45 VOLTS
- LOW CLAMPING RATIO

MAXIMUM RATINGS

1500 Watts of Peak Pulse Power dissipation at 25°C

$t_{clamping}$ (0 volts to $V_{(BR)}$ min): Unidirectional — Less than 1×10^{-12} seconds
Bidirectional — Less than 5×10^{-9} seconds

Operating and Storage temperatures: -65° to +175°C

Forward surge rating: 200 amps, 1/120 second at 25°C

(Applies to Unipolar or single direction only)

Steady State power dissipation: 1.0 watt

Repetition rate (duty cycle): .01%

ELECTRICAL CHARACTERISTICS


Clamping Factor: 1.33 @ Full rated power
1.20 @ 50% rated power

Clamping Factor: The ratio of the actual V_C (Clamping Voltage) to the actual $V_{(BR)}$ (Breakdown Voltage) as measured on a specific device.

1N6356 thru 1N6372 and MPT-5 thru MPT-45C

TRANSIENT ABSORPTION ZENER

④

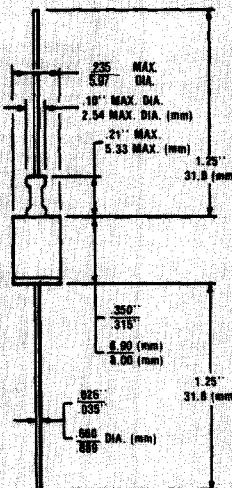

MECHANICAL CHARACTERISTICS

CASE: DO-13 welded, hermetically sealed, metal and glass.

FINISH: All external surfaces are corrosion resistant and leads solderable.

POLARITY: Cathode connected to case and marked. Bidirectional not marked.

WEIGHT: 1.4 grams (Appx.)

MOUNTING POSITION: Any.

1N6356 thru 1N6372 and MPT-5 thru MPT-45C

ELECTRICAL CHARACTERISTICS @ 25°C

MICROSEMI PART NUMBER	STAND-OFF VOLTAGE (NOTE 1) V_{WM} VOLTS	MAXIMUM REVERSE LEAKAGE @ V_{WM} I_D μA	MINIMUM* BREAKDOWN VOLTAGE @ mA V_{BR} (min) VOLTS	MAXIMUM CLAMPING VOLTAGE [Fig. 2] $I_{PP1} = 1A$ V_C VOLTS	MAXIMUM CLAMPING VOLTAGE [Fig. 2] @ $I_{PP2} = 10A$ V_C VOLTS	MAXIMUM PEAK PULSE CURRENT I_{PP3} A
IN6356 MPT-5	5.0	300	6.0	7.1	7.5	160
IN6357 MPT-8	8.0	25	9.4	11.3	11.5	100
IN6358 MPT-10	10.0	2	11.7	13.7	14.1	90
IN6359 MPT-12	12.0	2	14.1	16.1	16.5	70
IN6360 MPT-15	15.0	2	17.6	20.1	20.6	60
IN6361 MPT-18	18.0	2	21.2	24.2	25.2	50
IN6362 MPT-22	22.0	2	25.9	29.8	32.0	40
IN6363 MPT-36	36.0	2	42.4	50.6	54.3	23
IN6364 MPT-45	45.0	2	52.9	63.3	70.0	19

V_f at 100 amps peak, 8.3 msec sine wave equals 3.5 volts maximum


ELECTRICAL CHARACTERISTICS @ 25°C (Test Both Polarities)

IN6365 MPT-8C	8.0	25	9.4	11.4	11.6	100
IN6366 MPT-10C	10.0	2	11.7	14.1	14.5	90
IN6367 MPT-12C	12.0	2	14.1	16.7	17.1	70
IN6368 MPT-15C	15.0	2	17.6	20.8	21.4	60
IN6369 MPT-18C	18.0	2	21.2	24.8	25.5	50
IN6370 MPT-22C	22.0	2	25.9	30.8	32.0	40
IN6371 MPT-36C	36.0	2	42.4	50.6	54.3	23
IN6372 MPT-45C	45.0	2	52.9	63.3	70.0	19


C Suffix indicates Bidirectional

NOTE 1 TAZ are normally selected according to the reverse "Stand Off Voltage" (V_{WM}) which should be equal to or greater than the DC or continuous peak operating voltage level.


*The minimum breakdown voltage as shown takes into consideration the ± 1 volt tolerance normally specified for power supply regulation on most integrated circuit manufacturers data sheets. Similar devices are available with reduced clamping voltages where tighter regulated power supply voltages are employed.

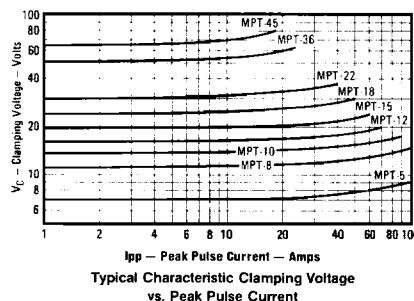

Typical Characteristic Clamping Voltage
vs. Peak Pulse Current

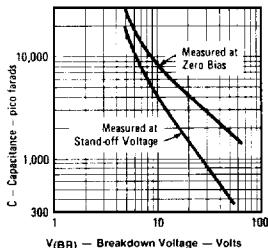

Typical Capacitance vs. Breakdown Voltage
(Unidirectional Types)

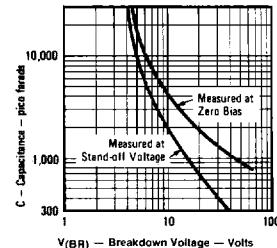

Typical Capacitance vs. Breakdown Voltage
(Bidirectional Types)