










Stiflleisten im Raster 1,27 mm Pin strips pitch 1.27 mm

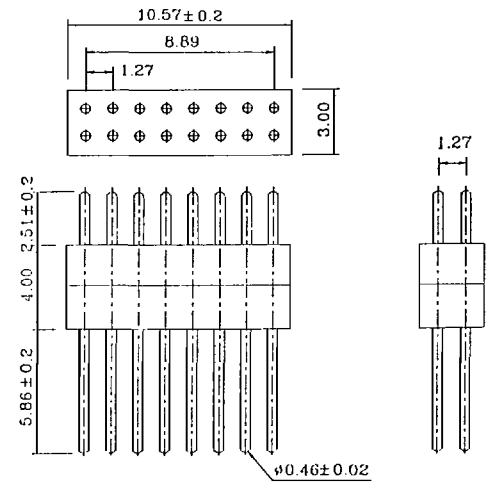

Art. Nr. / Part no.	Polzahl / No. of contacts	Art. Nr. / Part no.	Polzahl / No. of contacts
AW 160/G ¹ 32	32	AW 161/G ¹ 32	32
AW 160/Z ² 32	32	AW 161/Z ² 32	32

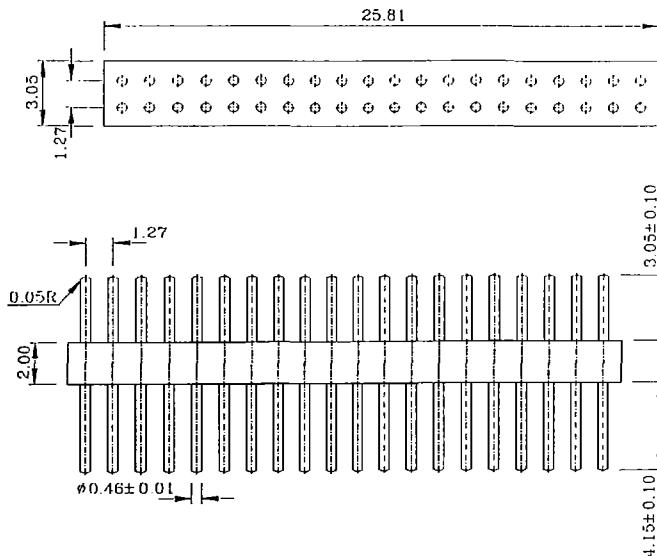

Art. Nr. / Part no.	Polzahl / No. of contacts	Art. Nr. / Part no.	Polzahl / No. of contacts
AWL 160/G ¹ 40	40	AWL 161/G ¹ 16	16

Technische Daten

1. Werkstoffe
Isolierkörper: Polyester, UL 94-VO
Kontakte: CuSn
G¹ = Gold über Nickel
Z² = Zinn über Nickel
2. Mechanische Daten
Kontaktabstand: 1,27 mm

3. Elektrische Daten
Strombelastbarkeit: 1 A
Spannungsfestigkeit: 500 V/AC
Isolationswiderstand: 5000 M Ω min.
Betriebstemperatur: -40 °C bis +105 °C

Technical data

1. Materials
Insulation body: Polyester, UL 94-VO
Contacts: CuSn
G¹ = gold plated over nickel
Z² = tin plated over nickel
2. Mechanical data
Pitch: 1.27 mm

3. Electrical data
Nominal power: 1 A
Dielectric strength: 500 V/AC
Insulation resistance: 5000 M Ω min.
Working temperature: -40° to +105 °C