

SPECIFICATIONS

Mechanical

Mating Force: 3.0kg (6.6Lb) min.
Unmating Force: 0.3kg (0.66Lb) min.
Durability : 5000 Cycles

Electrical


Voltage Rating: 150V max.
Current Rating: 1A max.
Contact Resistance: 50mΩ max.
Dielectric Withstanding Voltage: 500V
Insulation Resistance: 100MΩ

Physical


Housing: Thermoplastic, UL 94V-0
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Metal Spring: Copper alloy
Operating Temperature: -40 °C to +85 °C

AUDIO JACK Connector

JA Series
T/H Type
3 Bands
Plug 3.5mm
6 Pos.

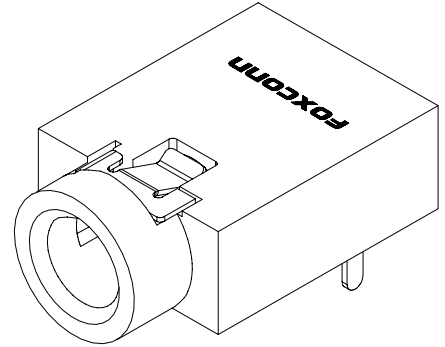

DRAWING

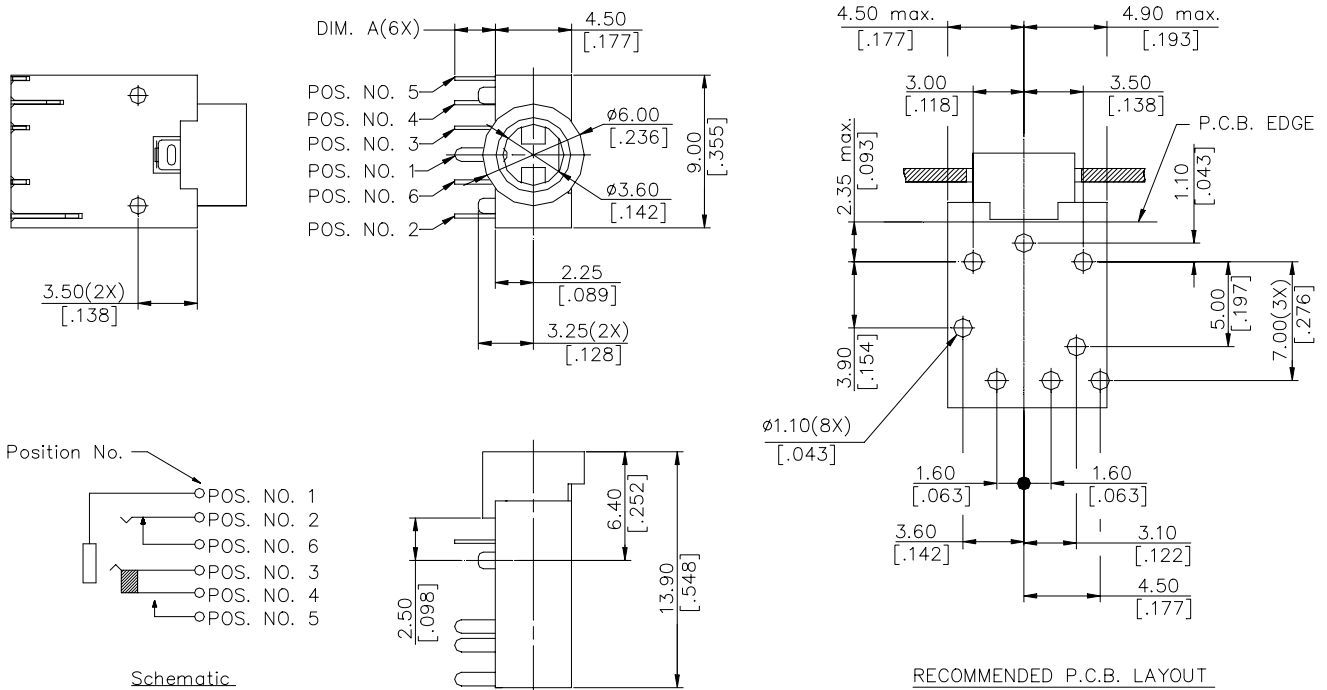

ORDERING INFORMATION

PRODUCT NO.: JA6333L-(W*)1R*-TR

Series Prefix J=Jack
Conn. Series A=Audio Jack
Body&Termination Type 6=Single Port, R/A,
Sleeve Style 3=W/O Bushing
Plug Type 3=3 Band
Plug Diameter 3=3.50 (0.141")
Contact Area Plating L=Pd/Ni + Gold Flash
W=High temperature Plastic

Packing Code TR=Tape Reel
Tail Length 0=2.00mm
 1=2.40mm
 2=1.45mm
W/O Shell& Reverse Schematic
Color B=Light Blue
 L=Lime
 P=Pink

JA6333L-1R1-TR	BLACK	2.40
JA6333L-1R0-TR	BLACK	2.00
JA6333L-1R2-TR	BLACK	1.45
JA6333L-WP1R2-TR	PINK 701C	1.45
JA6333L-WL1R2-TR	LIME 577C	1.45
JA6333L-WB1R2-TR	LIGHT BLUE 284C	1.45
P/N	COLOR	DIM. L