



| DATE | SYM | REVISION RECORD | AUTH. | DR. | CK. |
|----------|-----|-----------------|-------|-----|-----|
| 10/16/00 | - | ISSUED | | NT | DG |
| | | | | | |
| | | | | | |
| | | | | | |

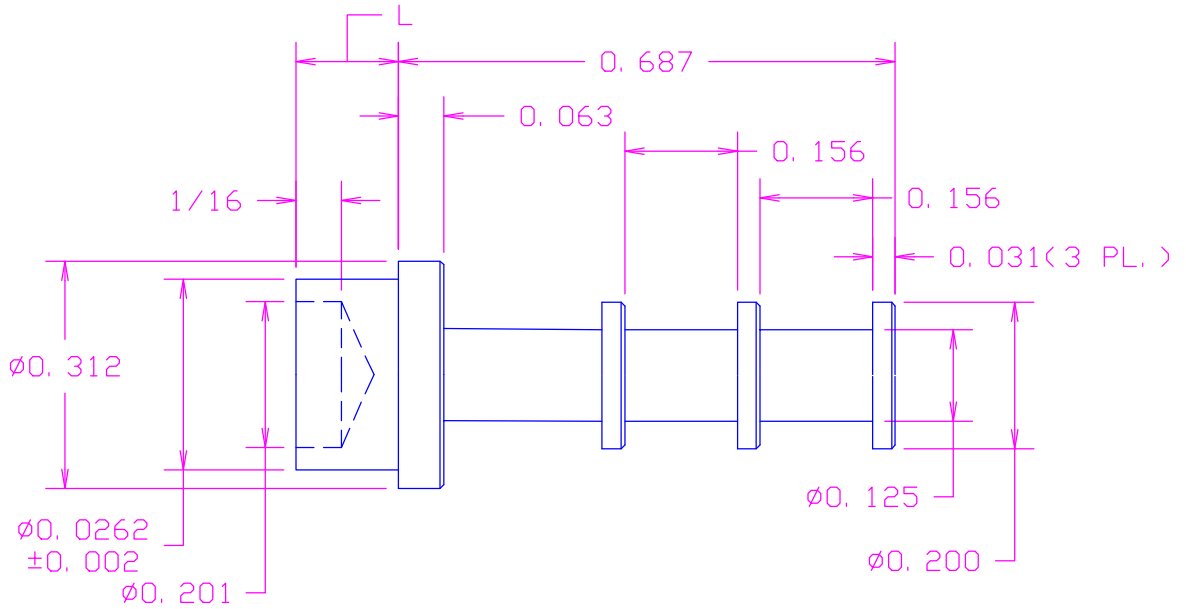

RECOMMENDED MOUNTING HOLE .266 DIA.(#H DRILL)
MATERIAL: BRASS PER ASTM B16,
ALLOY C36000, 1/2 HARD
FINISH: .0003"MIN. SILVER PER QQ-S-365,
TYPE II, GRADE A WITH NON-CHROMATE
PRESERVATIVE

ACTUAL SIZE

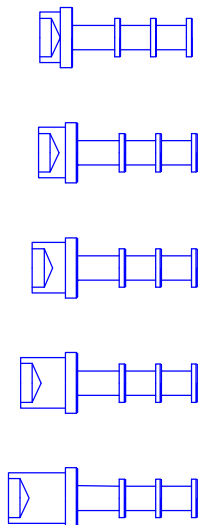

| | |
|--------------|------|
| PART NUMBER: | L: |
| 10-604-2-01 | .109 |
| 10-604-3-01 | .141 |
| 10-604-4-01 | .172 |
| 10-604-6-01 | .234 |
| 10-604-8-01 | .297 |

| | | | |
|---------------------------------|-------------------|-------------------------------|--|
| TOLERANCES (EXCEPT AS NOTED) | CONCORD | | ELECTRONICS CORPORATION |
| DECIMAL ± .005 | P/N | SCALE | 30 GREAT JONES ST. NEW YORK N. Y. 10012 |
| FRACTIONAL ± 1/64 | TITLE TERMINAL | | |
| ANGULAR ± 5° | DATE 11/15/00 | DRAWING NUMBER 10-604-X-01 | |