

RoHS Compliant Product
A suffix of "-C" specifies halogen free


DESCRIPTION

The SSD15N10 provide the designer with the best combination of fast switching. The TO-252 package is universally preferred for all commercial-industrial surface mount applications. The device is suited for charger, industrial and consumer environment.

FEATURES

- $R_{DS(on)} \leq 100\text{m}\Omega$ @ $V_{GS} = 10\text{V}$
- Super high density cell design for extremely low $R_{DS(on)}$
- Exceptional on-resistance and maximum DC current capability


MARKING




PACKAGE INFORMATION

Package	MPQ	Leader Size
TO-252	2.5K	13' inch

TO-252(D-Pack)

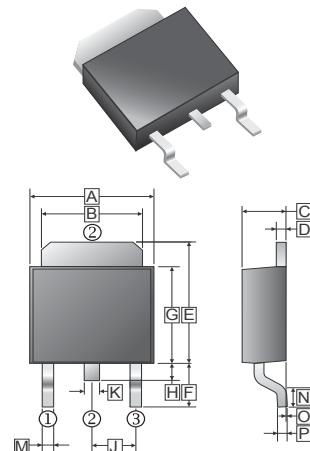

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.4	6.8	J	2.30	REF.
B	5.20	5.50	K	0.70	0.90
C	2.20	2.40	M	0.50	1.1
D	0.45	0.58	N	0.9	1.6
E	6.8	7.3	O	0	0.15
F	2.40	3.0	P	0.43	0.58
G	5.40	6.2			
H	0.8	1.20			

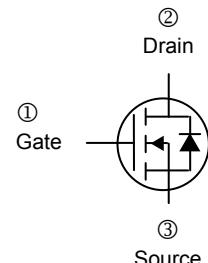

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	100	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current $T_C=25^\circ\text{C}$	I_D	15	A
$T_C=70^\circ\text{C}$		13.8	A
Pulsed Drain Current ¹	I_{DM}	24	A
Power Dissipation $T_C=25^\circ\text{C}$	P_D	44.6	W
$T_A=25^\circ\text{C}$		2	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 ~ 150	°C
Thermal Resistance Ratings			
Maximum Thermal Resistance Junction-Ambient (PCB mount) ³	$R_{\theta JA}$	62.5	°C / W
Maximum Thermal Resistance Junction-Case	$R_{\theta JC}$	2.8	°C / W

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test conditions
Drain-Source Breakdown Voltage	BV_{DSS}	100	-	-	V	$V_{GS}=0$, $I_D=250\mu\text{A}$
Gate Threshold Voltage	$V_{GS(\text{th})}$	1.0	-	2.5	V	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$
Gate-Source Leakage Current	I_{GSS}	-	-	± 100	nA	$V_{GS} = \pm 20\text{V}$
Drain-Source Leakage Current	I_{DSS}	-	-	1	μA	$V_{DS}=80\text{V}$, $V_{GS}=0$
Static Drain-Source On-Resistance ²	$R_{DS(\text{ON})}$	-	100	110	m Ω	$V_{GS}=10\text{V}$, $I_D=8\text{A}$
Total Gate Charge ²	Q_g	-	26.2	-	nC	$I_D=10\text{A}$ $V_{DS}=80\text{V}$ $V_{GS}=10\text{V}$
Gate-Source Charge	Q_{gs}	-	4.6	-		
Gate-Drain ("Miller") Change	Q_{gd}	-	5.1	-		
Turn-on Delay Time ²	$T_{d(\text{on})}$	-	4.2	-	nS	$V_{DS}=50\text{V}$ $I_D= 10\text{A}$ $V_{GS}=10\text{V}$ $R_L=5\Omega$ $R_G=3.3\Omega$
Rise Time	T_r	-	8.2	-		
Turn-off Delay Time	$T_{d(\text{off})}$	-	35.6	-		
Fall Time	T_f	-	9.6	-		
Input Capacitance	C_{iss}	-	1535	-	pF	$V_{GS}=0$ $V_{DS}=15\text{V}$ $f=1.0\text{MHz}$
Output Capacitance	C_{oss}	-	60	-		
Reverse Transfer Capacitance	C_{rss}	-	37	-		
Gate Resistance	R_g	-	2	-	Ω	$f=1.0\text{MHz}$
Source-Drain Diode						
Forward On Voltage ²	V_{SD}	-	-	1.2	V	$I_S=8.0\text{A}$, $V_{GS}=0\text{V}$

Notes:

1. Pulse width limited by maximum junction temperature.
2. Pulse test.
3. Surface Mounted on 1 in₂ copper pad of FR4 Board.

CHARACTERISTICS CURVE

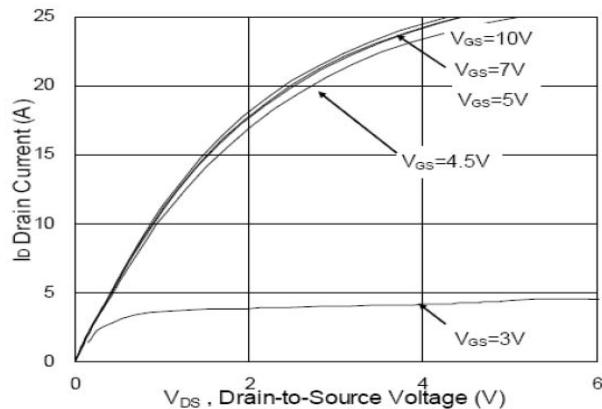


Fig 1. Typical Output Characteristics

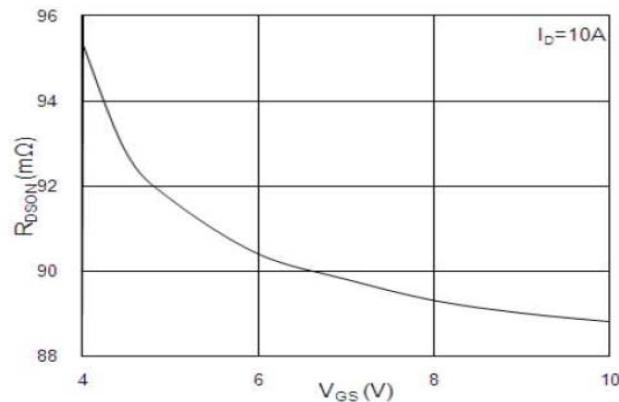


Fig 2. On-Resistance vs. Gate-Source

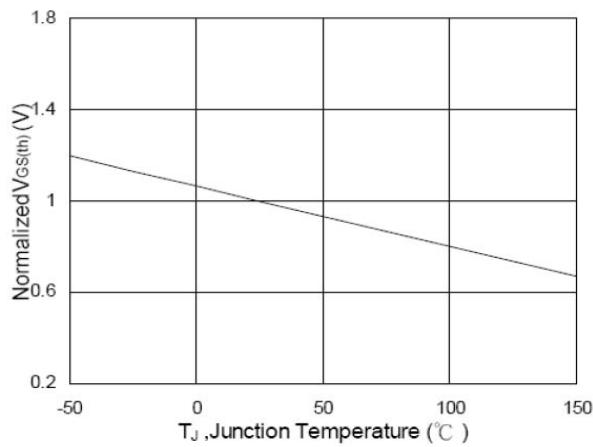


Fig 3. Gate Threshold Voltage vs. Junction Temperature

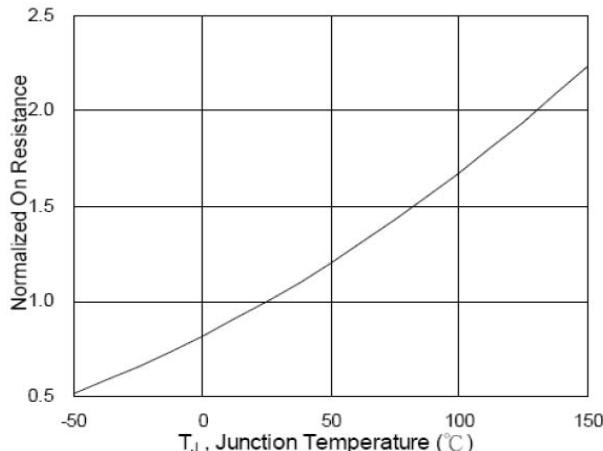


Fig 4. On-Resistance vs. Junction Temperature

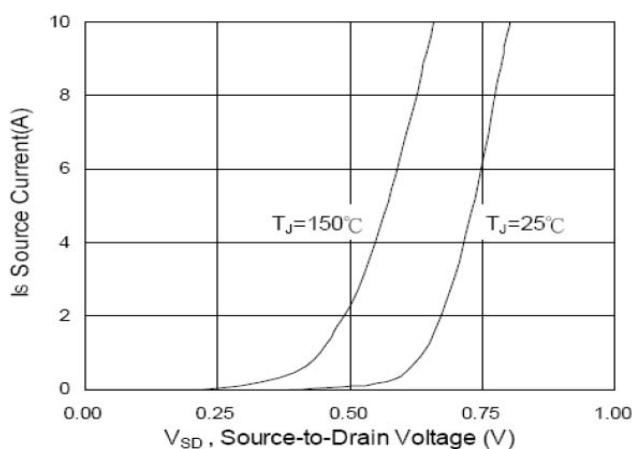


Fig 5. Forward Characteristics of Reverse Diode

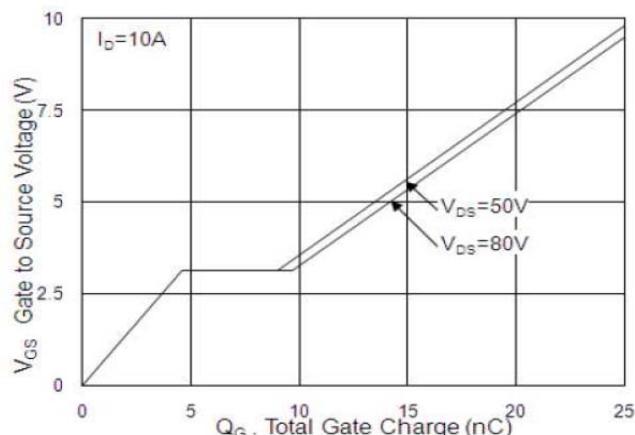


Fig 6. Gate Charge Characteristics

CHARACTERISTICS CURVE

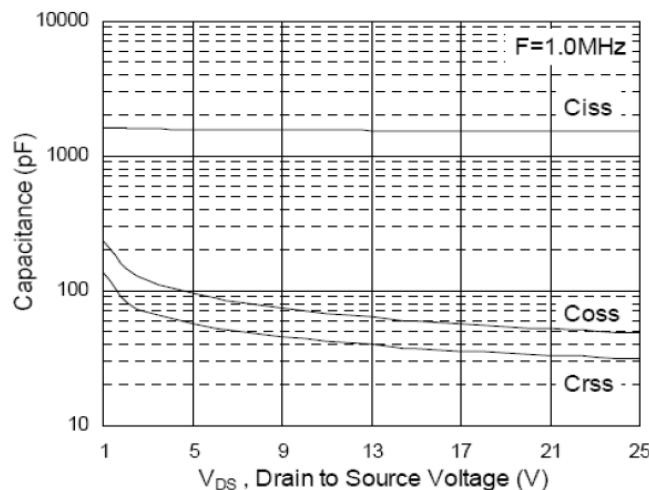


Fig 7. Typical Capacitance Characteristics

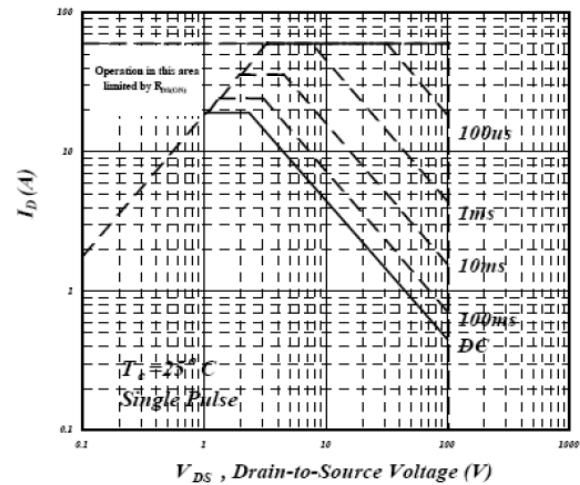


Fig 8. Maximum Safe Operating Area

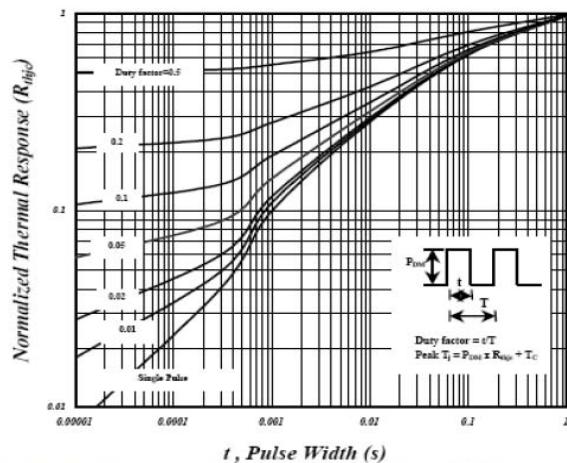


Fig 9. Normalized Transient Thermal Resistance vs. Pulse Width

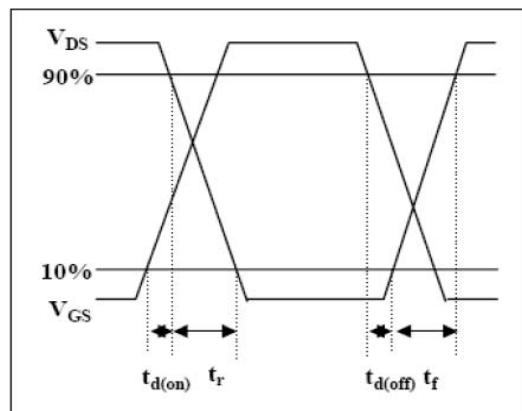


Fig 10. Switching Time Waveform

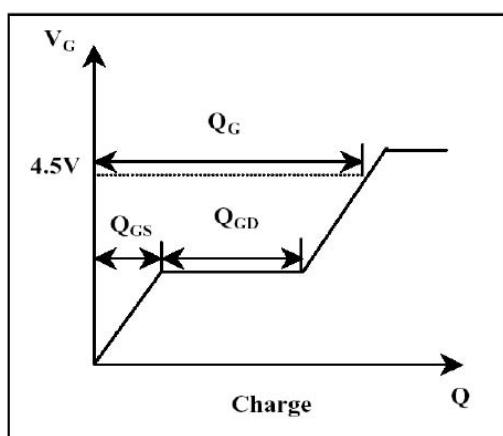


Fig 11. Gate Charge Waveform

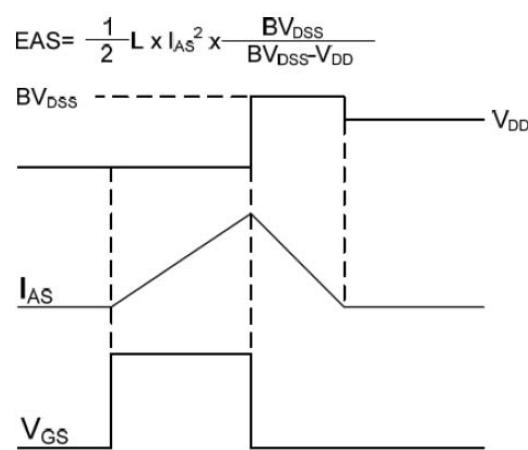


Fig 12. Unclamped Inductive Switching Waveform