

RF AMPLIFIER

MODEL *BXMP1005*

Medium Power Amplifier

Available as: WNMP1005, 10 Pin .625" Sq. Surface Mount (SG4)
BXMP1005, SMA Connectorized Housing

Features

- High Power Output: 1 Watt
- Two Stage Gain: 21 dB
- SMA Connectorized Housing

Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +66 dBm (Typ.)
Second Order Two Tone Intercept Point +63 dBm (Typ.)
Third Order Two Tone Intercept Point..... +43 dBm (Typ.)

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency (MHz)	10 - 200 MHz	10 - 200 MHz
Gain (dB)	21	20 Min.
Power @ 1 dB Comp. (dBm)	30	28.5 Min.
Reverse Isolation (dB)	-15	-13 Max.
VSWR In	1.5:1	2:0:1 Max.
Out	1.7:1	2:0:1 Max.
Noise figure (dB)	5.5	6.5 Max.
Power Vdc m A	+15 300	+15 320 Max.


Note: Care should always be taken to effectively ground the case of each unit.

Maximum Ratings

Ambient Operating Temperature -30°C to + 85 °C
Storage Temperature -62°C to + 125 °C
Case Temperature + 150 °C
DC Voltage + 18 Volts
Continuous RF Input Power + 20 dBm
Short Term RF Input Power ... 200 Milliwatts (1 Minute Max.)
Maximum Peak Power 0.2 Watt (3 µsec Max.)

Legend ——— + 25 °C - - - - + 60°C 0 °C

Typical Performance Data

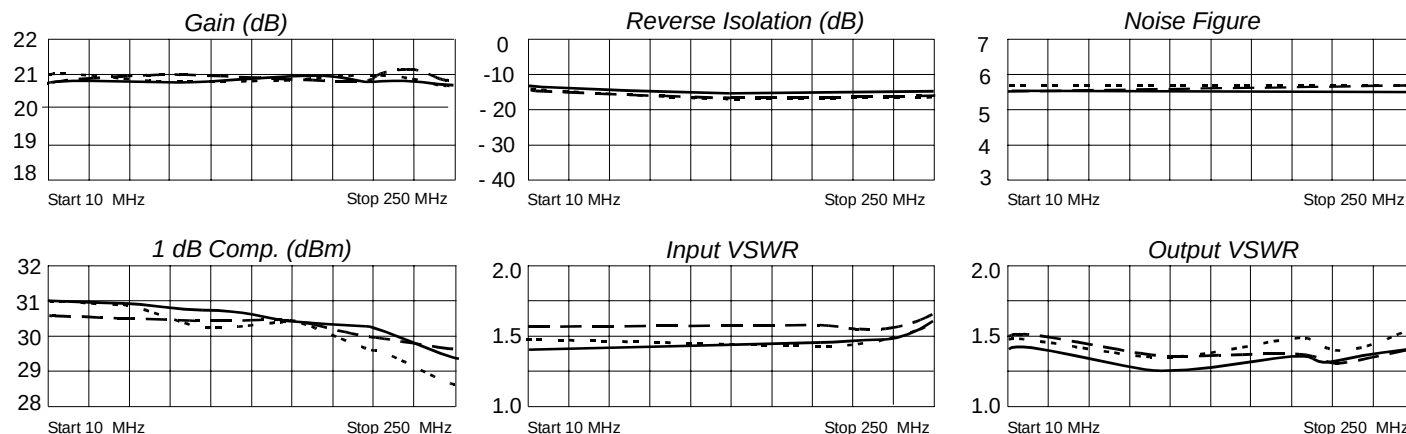

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 04/29/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001