

RoHS Compliant Product


A suffix of "C" specifies halogen free

FEATURES

- Trench MOS Schottky technology
- Low forward voltage drop
- Low reverse current
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.98 g (Approximate)

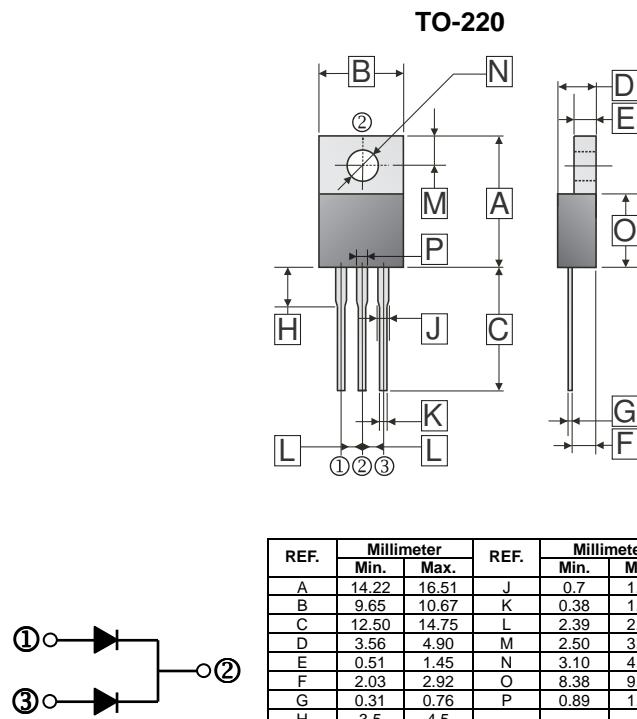

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%).

Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	120	V
Working Peak Reverse Voltage	V_{RSM}	120	V
Maximum DC Blocking Voltage	V_{DC}	120	V
Maximum Average Forward Rectified Current (Per Leg)	I_F	10	A
(Per Device)		20	
Peak Forward Surge Current, 8.3 ms single half sine-wave	I_{FSM}	150	A
Voltage Rate of Change (Rated V_R)	dv/dt	10000	$V/\mu s$
Typical Thermal Resistance	$R_{\theta JC}$	2	$^{\circ}C/W$
Operating and Storage Temperature Range	T_J, T_{STG}	-40~150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V_F	0.66	0.7	V	$I_F = 3A, T_J = 25^{\circ}C$
		0.71	0.75		$I_F = 5A, T_J = 25^{\circ}C$
		0.8	0.85		$I_F = 10 A, T_J = 25^{\circ}C$
		0.65	-		$I_F = 10 A, T_J = 125^{\circ}C$
Maximum DC Reverse Current at Rated DC Blocking Voltage ²	I_R	-	0.1	mA	$T_J=25^{\circ}C$
		-	10		$T_J=100^{\circ}C$
Typical Junction Capacitance ¹	C_J	210	-	pF	

NOTES:

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Pulse Test : Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

RATINGS AND CHARACTERISTIC CURVES

