

0,8mm HI-SPEED DATA LINK HFEM2 SERIES

SPECIFICATIONS

For complete specifications see www.samtec.com?HFEM2-DP or www.samtec.com?HFEM2-SE

Terminal:

QTE or QTE-DP Series



Socket:

QSE or QSE-DP Series

Plating:

Au over 50µ" (1,27µm) Ni

Cable:

HFEM2 (2 Layer)
1/2 oz. rolled annealed copper

Adhesive:

FR (DuPont)

Stiffener:

FR-4 glass epoxy

Flammability Rating:

UL 94 VO

Operating Temp Range:

-55°C to +105°C

Unmating Force (-RT1 option):

-RT1 option increases unmating force up to 50%

RoHS Compliant:

Yes

-DP Mates with:
QTE-DP, QSE-DP

-SE Mates with:
QTE, QSE

Differential Pairs or Single-Ended


Metal Ground Plane




Cable Length	HFEM2 Rated @ -3dB Insertion Loss	
	-DP	-SE
5" (127mm)	2.62 GHz / 5.24 Gbps	2.13 GHz / 4.26 Gbps
10" (254mm)	1.36 GHz / 2.72 Gbps	1.23 GHz / 2.46 Gbps

(0,80mm)
.0315"
pitch

-SE ROUTING



RUGGED APPLICATIONS

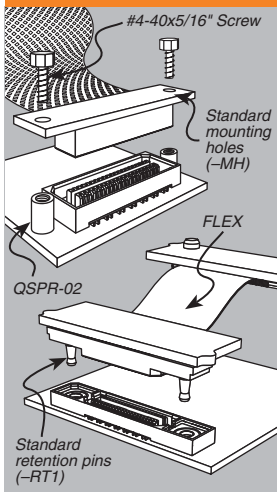


APPLICATION SPECIFIC OPTION

Three layer flex available.
Call Samtec.

Important Note:
Product may have some lines dedicated to ground. For actual signal-to-ground pinouts, see assembly print at web addresses above.

Note: Some sizes, styles and options are non-standard, non-returnable.

TYPE	SIGNAL PINS	T	OVERALL LENGTH	SIGNAL ROUTING	OTHER OPTION
HFEM2 = 2 layer flex	-014, -028, -042 = Number of Pairs (-DP) -020, -040, -060 = Pins per row (-SE) (Total number of Signals)		-03.00 = (76,20mm) 3.00" -05.00 = (127,0mm) 5.00" -10.00 = (254,0mm) 10.00"	-DP = Differential Pairs -SE = Single-Ended	Leave blank for no Mounting Holes or Retention Pins -RT1 = Retention Option -MH = Mounting Holes (3,18mm) .125" DIA

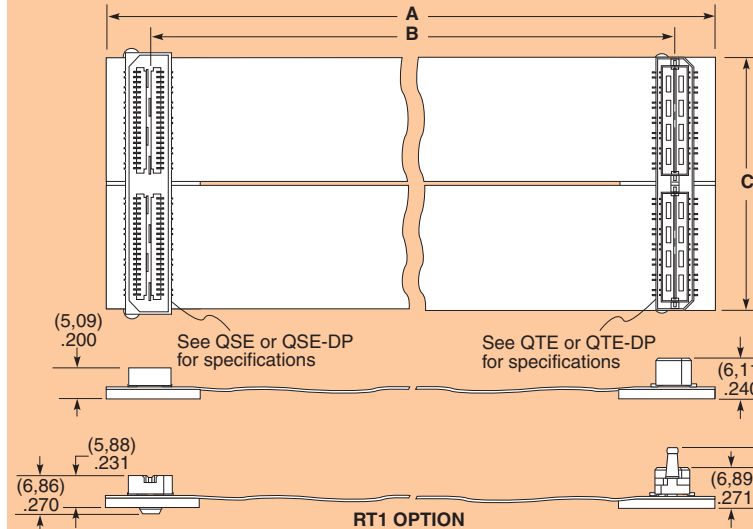

SIGNAL PAIRS/PINS PER ROW	C	C (With -RT1)	C (With -MH)
-014/-020	(19,50) .768	(33,98) 1.338	(27,62) 1.087
-028/-060	(39,52) 1.556	(53,99) 2.126	(47,64) 1.876
-042/-060	(59,54) 2.344	(74,00) 2.914	(67,65) 2.663

OVERALL LENGTH	A	B
-03.00	(76,20) 3.00	(64,52) 2.54
-05.00	(127,00) 5.00	(115,32) 4.54
-10.00	(254,00) 10.00	(242,32) 9.54

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM