

## Linear Systems replaces discontinued Siliconix JPAD10

The LSJPAD10 is a low leakage Pico-Amp Diode packaged in TO-92

The LSJPAD10 extremely low-leakage diode provides a superior alternative to conventional diode technology when reverse current (leakage) must be minimized. The LSJPAD10 features a leakage current of  $-10$  pA and is well suited for use in applications such as input protection for operational amplifiers.

### LSJPAD10 Benefits:

- Negligible Circuit Leakage Contribution
- Circuit "Transparent" Except to Shunt High-Frequency Spikes
- Simplicity of Operation

### LSJPAD10 Applications:

- Op Amp Input Protection
- Multiplexer Overvoltage Protection

### FEATURES

DIRECT REPLACEMENT FOR SILICONIX JPAD10

REVERSE BREAKDOWN VOLTAGE	$BV_R \geq -35V$
ULTRALOW LEAKAGE	$\leq 10$ pA
REVERSE CAPACITANCE	$C_{RSS} \leq 2.0pF$

### ABSOLUTE MAXIMUM RATINGS

@ 25°C (unless otherwise noted)

### Maximum Temperatures

Storage Temperature	-65°C to +150°C
Operating Junction Temperature	-55°C to +135°C

### Maximum Power Dissipation

Continuous Power Dissipation	350mW
------------------------------	-------

### MAXIMUM CURRENT

Forward Current (Note 1)	10mA
--------------------------	------

### LSJPAD10 ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)

SYMBOL	CHARACTERISTICS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
$BV_R$	Reverse Breakdown Voltage	-35	--	--	V	$I_R = -1\mu A$
$V_F$	Forward Voltage	--	0.8	1.5	V	$I_F = 5mA$
$C_{RSS}$	Total Reverse Capacitance	--	1.5	2	pF	$V_R = -5V, f = 1MHz$
$I_R$	Maximum Reverse Leakage Current	--	--	-10	pA	$V_R = -20V$

### Notes:

1. Absolute maximum ratings are limiting values above which LSJPAD10 serviceability may be impaired.


### Available Packages:

LSJPAD10 in TO-92  
LSJPAD10 available as bare die

Please contact Microcross for full package and die dimensions



TO-92 (Bottom View)

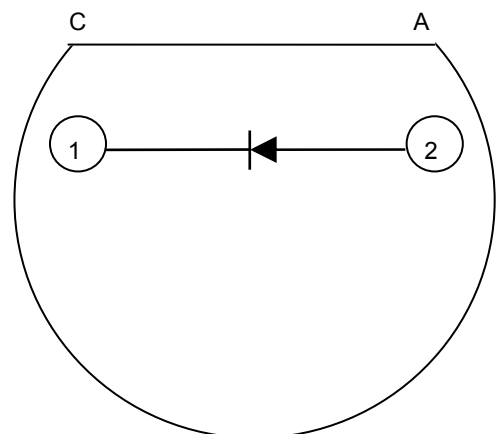

### Microcross Components Europe

Tel: +44 1603 788967  
Email: [chipcomponents@microcross.com](mailto:chipcomponents@microcross.com)  
Web: <http://www.microcross.com/distribution.com>