


PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.0	19.4
2.0-3.0	19.8



CIRCUIT: SPST


SWITCH FUNCTION	
POS. 1	POS. 2
(ON)	OFF
1-1a	OPEN

$\langle \rangle = \text{MOMENTARY}$

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN mm
2. GENERAL TOLERANCE: 0.00 ± 0.4
 0.00 ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 15A @ 125VAC OR 6A @ 250VAC
5. ELECTRIC LIFE: 10,000 cycles
6. INSULATION RESISTANCE: >1000 mega-ohm
7. DIELECTRIC STRENGTH: >1500 V 1 minute,
>3000 V between poles

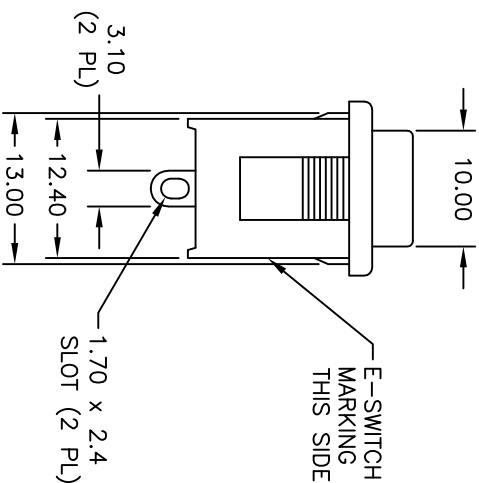

					E-SWITCH[®]				
					TITLE				
					R1966 F BLK BLK G S				
A		10728	RELEASED FOR PRODUCTION	7/5/00	GLG				
REV.		ECN NO.	DESCRIPTION	DATE	CHKD				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									
SCALE		DATE		DR	DWG	REV			
1.5:1		7/5/00		GLG	M304206	A			