

## Power Schottky Rectifier - 5Amp 45Volt

### Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction


### Mechanical data

- Case : Molded plastic
- Epoxy : UL 94V-0 rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202,method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 1.2 grams


### Maximum ratings and Electrical characteristics

Parameters		SB545L	UNIT
Maximum Recurrent Peak Reverse Voltage		45	V
Maximum RMS Voltage		31	V
Maximum DC Blocking Voltage		45	V
Maximum Average Forward Rectified Current		5	A
Peak Forward Surge Current		100	A
Maximum Instantaneous Forward Voltage at 5A	T <sub>C</sub> = 25°C	0.50	V
	T <sub>C</sub> = 125°C	0.40	
Maximum Average Reverse Current at Rated DC Blocking Voltage	T <sub>C</sub> = 25°C	0.5	mA
	T <sub>C</sub> = 125°C	20	
Typical Junction Capacitance		250	pF
Typical Thermal Resistance R <sub>θJA</sub>		25	°C/W
Operating and Storage Temperature Range		-50 to +150	°C


June 2010 / Rev.6.6

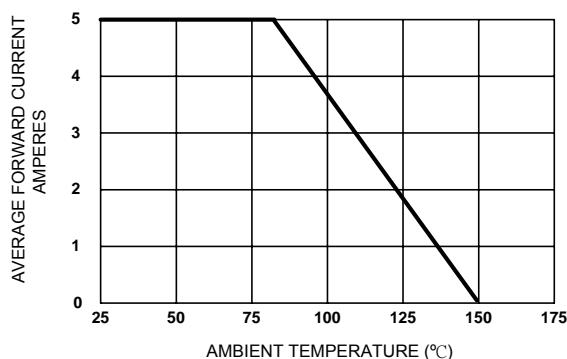


**Figure 1. Forward Current Derating Curve**

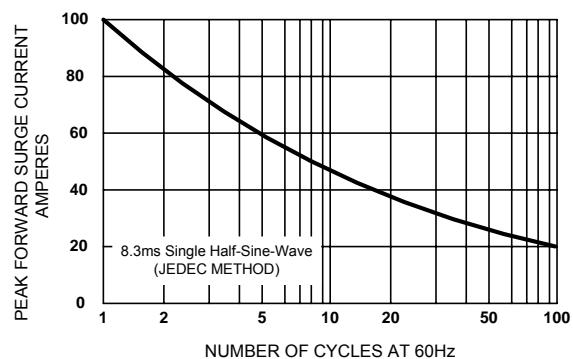


**Figure 2. Maximum Non-repetitive Surge Current**

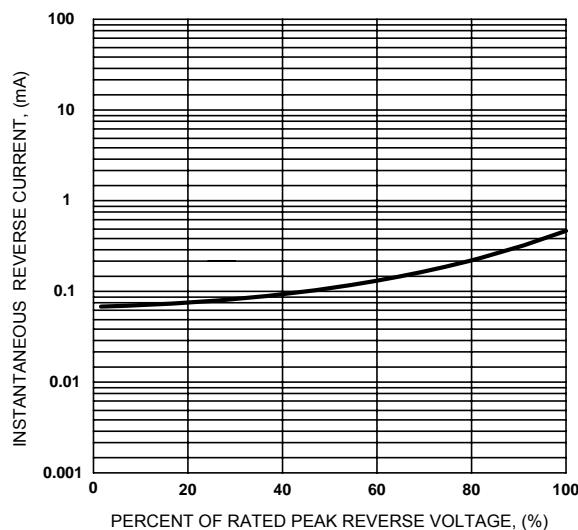

**Figure 3. Typical Reverse Characteristics**

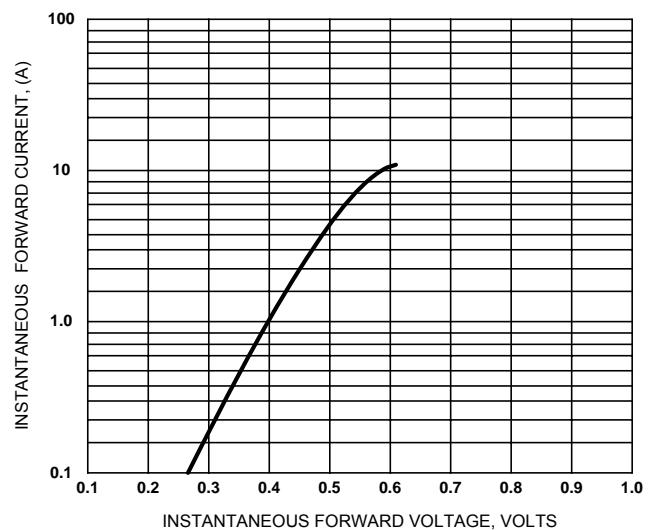

**Figure 4. Typical Forward Characteristics**

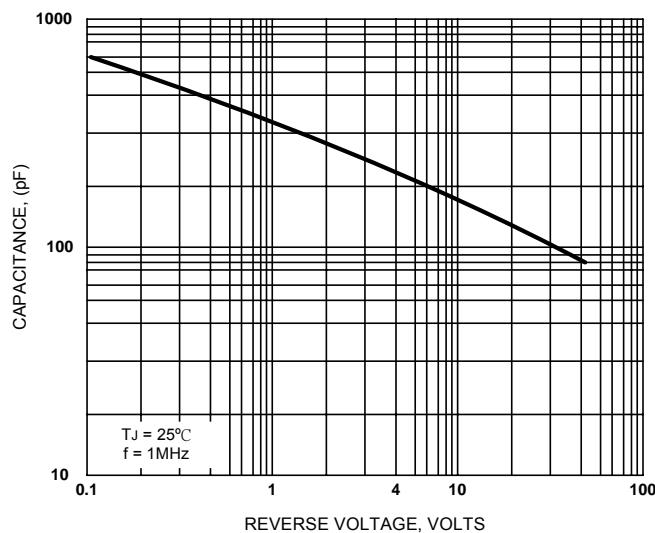

**Figure 5. Typical Junction Capacitance**

