

SPECIFICATIONS

Mechanical

Mating Force: 0.142Kgf max. per contact pair
Unmating Force: 0.017Kgf min. per contact pair
Contact Retention Force: 0.91Kgf min per contact.

Electrical


Current Rating: 1.0A
Contact Resistance: 35mΩ max.
Dielectric Withstanding Voltage: 500V /1min.
Insulation Resistance: 1000MΩ min, initial.

Physical


Housing: Thermoplastic, UL 94V-0 rated in black Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55°C to +85°C

SCSI Serial Connector

QA Series
Right Angle, T/H Type
2.54mm [.100] Pitch
Stacked 68 Pos.

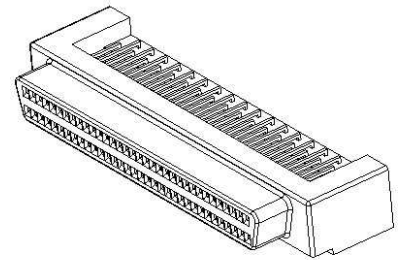

DRAWING

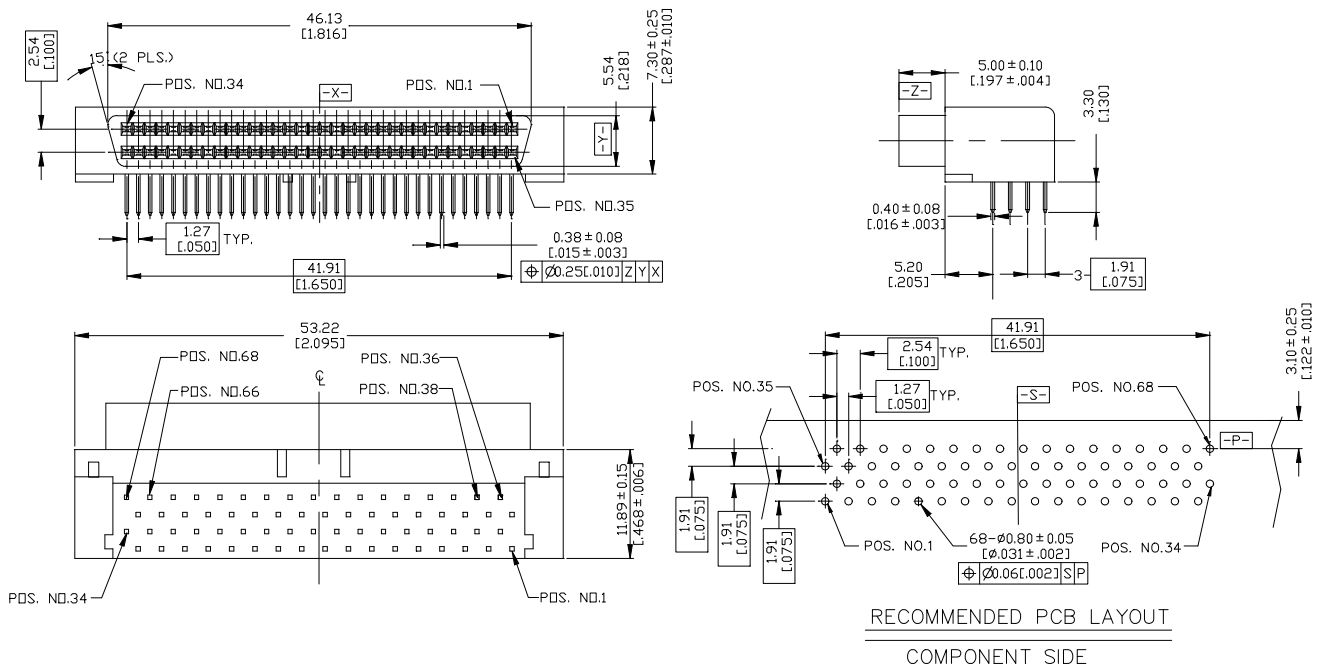

ORDERING INFORMATION

PRODUCT NO. : QA 1 1 3 4 3 -PNB7- A F

Series Prefix _____
Termination Type _____
1=Right Angle
Contact DesignType _____
1=Female
No. of Pos. _____
34=68 Pos .
Lead Free Code _____
F=Lead Free
Package Code _____
A=Tube
Extension Code _____
Contact Plating _____
3= 30u"Gold Plating

QA11343-PNB7-AF	30u" GOLD PLATING AT CONTACT AREA
P/N	PLATING