

RoHS Compliant Product

A suffix of "-C" specifies halogen-free and RoHS Compliant




## FEATURES

- Glass passivated junction
- High surge current capability
- Low reverse current
- Component in accordance to RoHS 2002/95/EC

## MECHANICAL DATA

- Cases: SMC
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead Free Plating(Tin Finish)  
Solderable Per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.231 grams(approximate)

SMC



## PACKAGE INFORMATION

Package	MPQ	Leader Size
SMC	3K	13 inch

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.750	3.250	E	-	0.203
B	6.520	7.110	F	7.750	8.130
C	5.590	6.220	G	0.760	1.520
D	2.000	2.620	H	0.150	0.305

## MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)

Parameters	Symbol	Part Number							Unit
		QG 801C	QG 802C	QG 803C	QG 804C	QG 805C	QG 806C	QG 807C	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum average forward rectified current	I <sub>F</sub>	8							A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	200							A
Maximum Instantaneous Forward Voltage @ I <sub>F</sub> =8A	V <sub>F</sub>	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	T <sub>C</sub> =25°C	5							μA
	T <sub>C</sub> =100°C	50							
Typical Junction Capacitance <sup>1</sup>	C <sub>J</sub>	50							pF
Thermal Resistance Junction to Ambient <sup>2</sup>	R <sub>θJA</sub>	28							°C / W
Thermal Resistance Junction to Lead <sup>2</sup>	R <sub>θJL</sub>	5							°C / W
Storage and Operating Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 ~ 150							°C

Notes :

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC
2. FR4 Board Heat sink size: 30\*30mm.

**MAXIMUM RATINGS CURVES**

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

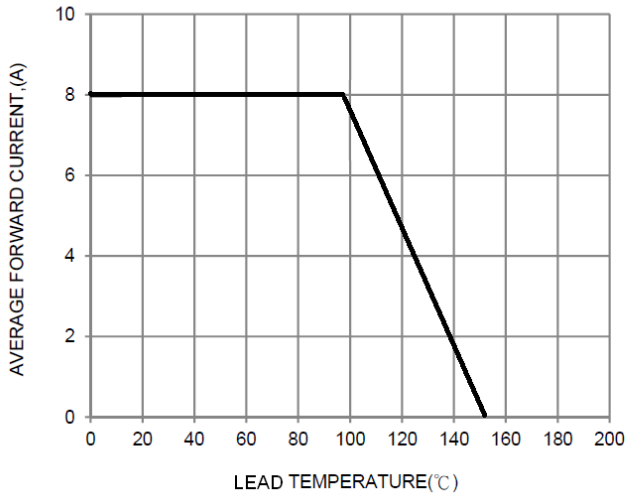


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

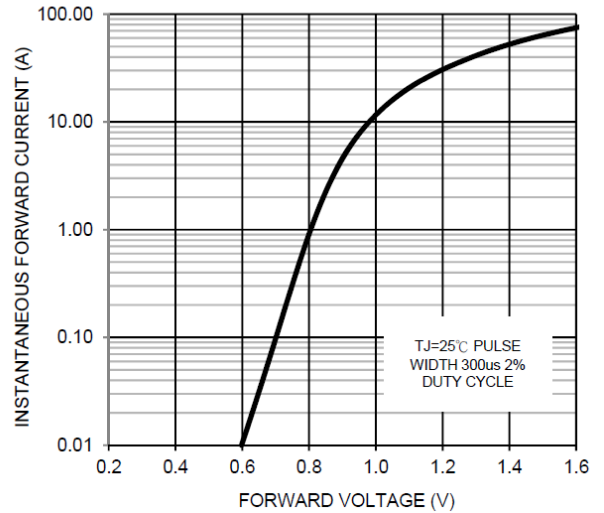


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

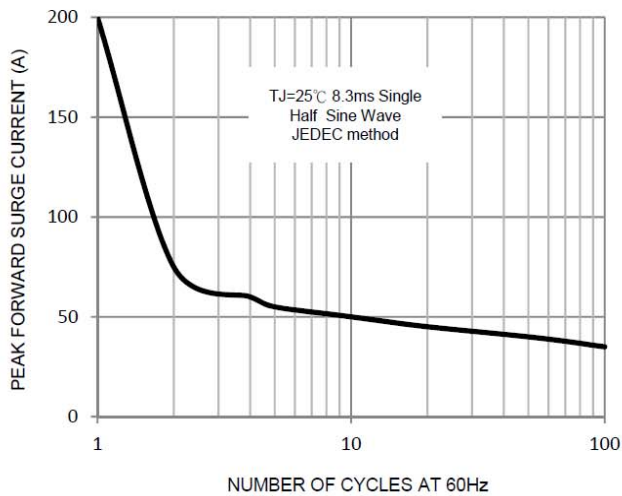


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

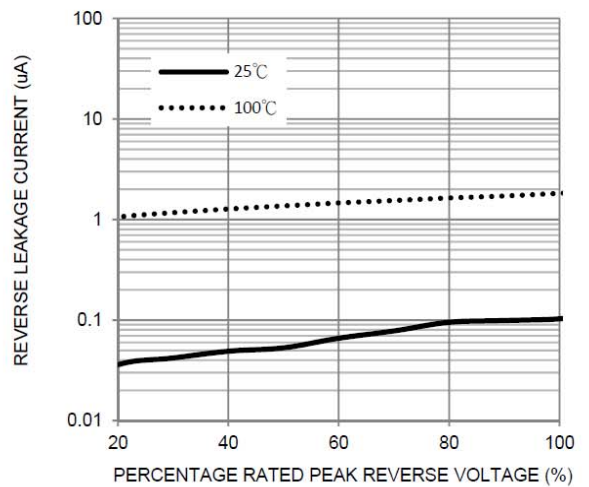


FIG. 5-TYPICAL JUNCTION CAPACITANCE

