



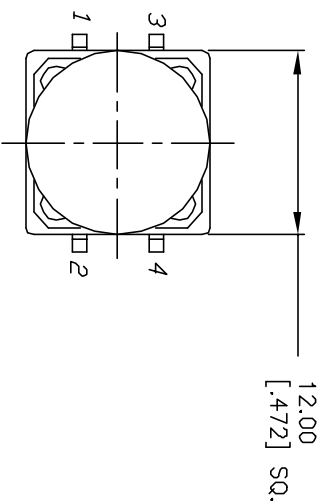

RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPST

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50mA @12V DC
5. CONTACT MATERIAL: SILVER
6. CONTACT RESISTANCE: 100mΩ (MIN)
7. MECHANICAL LIFE: ≥100,000 CYCLES
8. OPERATING FORCE: 160 ±50gf
9. TRAVEL: 0.3 ±0.15mm

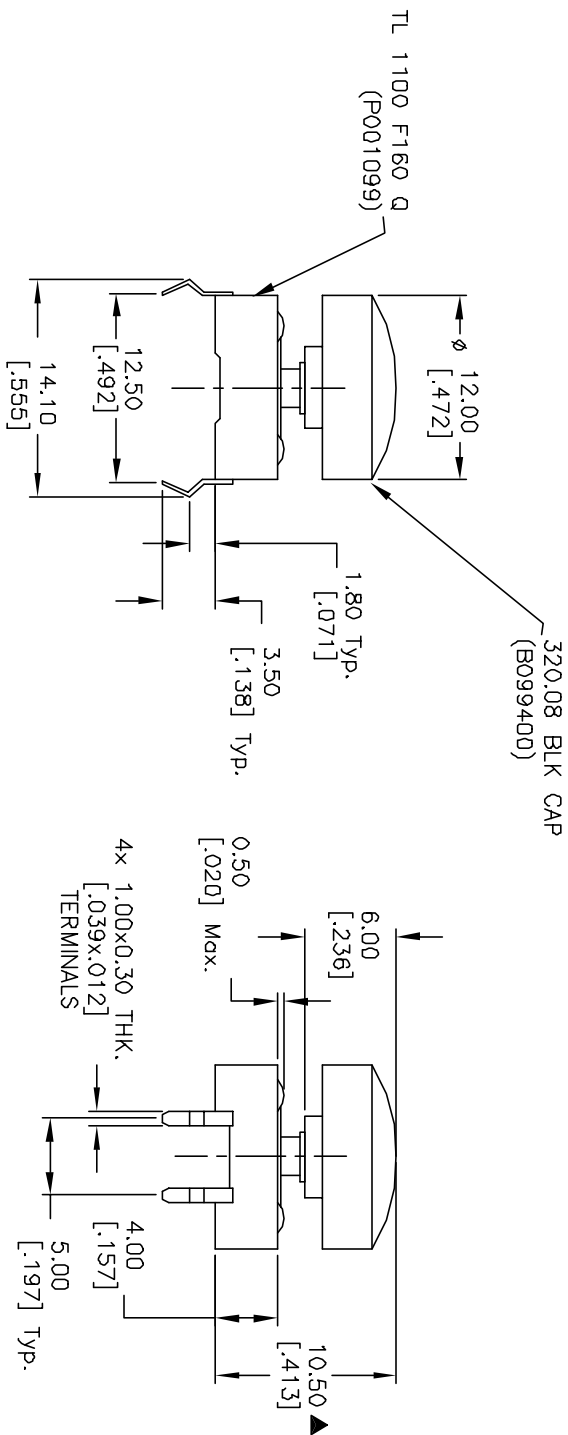

8. OPERATING FORCE: 160 ±50gf 9. TRAVEL: 0.3 ±0.15mm			
A	11457	RELEASED FOR PRODUCTION	10/25/01 CJC
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
E-SWITCH®			
TITLE			
TL1100 F160 Q/320.08 BLK			
SCALE	DATE	DR	DWG
2:1	10/25/01	CJC	XP0104A
			REV
			A