

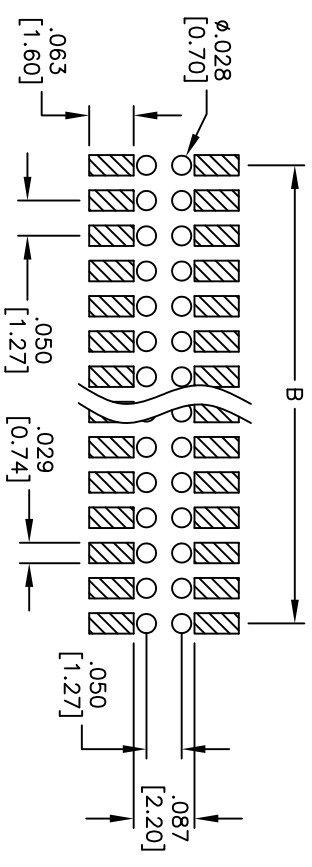
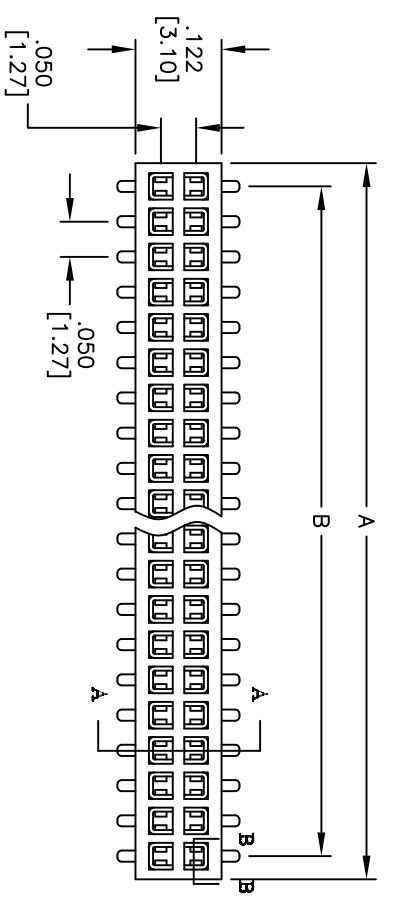


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	03/23/05	
A		REDRAWN	12/25/08	



Recommended PCB Layout

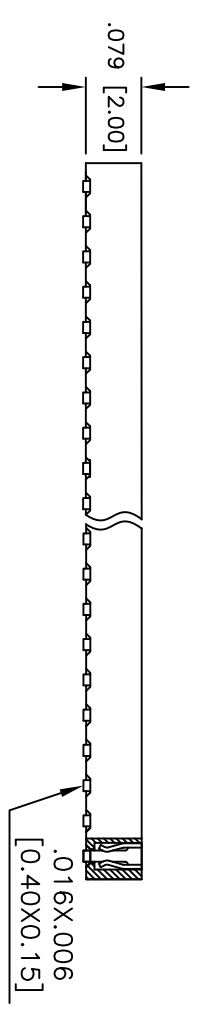

SPECIFICATIONS:

Material:
 Insulator: Nylon 6T, glass reinforced rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate overall.
Electrical:
 Operating voltage: 500 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 1,000 Mohms min.
Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

Positions: 04 thru 50
 A = .050 [1.27] x No. of Positions per Row + .016 [0.40]
 B = .050 [1.27] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .050" x .050" DUAL ROW RECEPTACLE STRIP
 .079 [2.00] HEIGHT, BOTTOM ENTRY, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS			
DRAWN	SS	DATE	03/23/05
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	HRS-2C-XX-G-SMT	A	
REF:	S00019C	SCALE:	NTS
		SHEET:	1 OF 1