

JCA Series



- Compact 1.0" x 0.8" Metal Package
- Industry Standard Pin Out
- 2:1 Input Range
- Single & Dual Outputs
- Operating Temperature -40 °C to +100 °C
- UL & TUV Approval Pending
- 3 Year Warranty

Specification

Input

Input Voltage Range	<ul style="list-style-type: none"> • 5 V (4.5-9.0 VDC) • 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-75 VDC)
Input Current	<ul style="list-style-type: none"> • See table
Input Filter	<ul style="list-style-type: none"> • Pi network
Undervoltage Lockout	<ul style="list-style-type: none"> • Turn On by 95% of rated input • Turn Off by 85% of rated input
Input Reflected Ripple Current	<ul style="list-style-type: none"> • 80 mA, 5 V input models, 30 mA all others • 12 μH inductor, 5 Hz to 20 MHz
Input Surge	<ul style="list-style-type: none"> • 5 V models 10 V for 1 s max, • 12 V models 25 V for 1 s max, • 24 V models 50 V for 1 s max, • 48 V models 100 V for 1 s max

Output

Output Voltage	<ul style="list-style-type: none"> • See table
Initial Set Accuracy	<ul style="list-style-type: none"> • $\pm 1\%$ max
Start Up Delay	<ul style="list-style-type: none"> • 30 ms max
Start Up Rise Time	<ul style="list-style-type: none"> • 3.5 ms typical
Minimum Load	<ul style="list-style-type: none"> • No minimum load required
Line Regulation	<ul style="list-style-type: none"> • $\pm 0.3\%$
Load Regulation	<ul style="list-style-type: none"> • $\pm 1\%$
Cross Regulation	<ul style="list-style-type: none"> • $\pm 5\%$ on dual output models with one output at 5% load and other varied from 5% to 100%
Transient Response	<ul style="list-style-type: none"> • 4% max deviation, recovery to within 1% in $< 500 \mu$s for a 25% load change at 1 A/μs
Ripple & Noise	<ul style="list-style-type: none"> • 50 mV pk-pk, 20 MHz bandwidth
Overcurrent Protection	<ul style="list-style-type: none"> • 150% typical, trip and restart (hiccup mode)
Short Circuit Protection	<ul style="list-style-type: none"> • Continuous with auto recovery
Overvoltage Protection	<ul style="list-style-type: none"> • 150% typical, Recycle input to reset
Temperature Coefficient	<ul style="list-style-type: none"> • $\pm 0.05\%/^{\circ}\text{C}$

General

Efficiency	<ul style="list-style-type: none"> • See table
Isolation	<ul style="list-style-type: none"> • 1500 VDC Input to Output, basic insulation • 500 VDC Input to Case • 500 VDC Output to Case
Switching Frequency	<ul style="list-style-type: none"> • 300 kHz typical
Power Density	<ul style="list-style-type: none"> • 31.25 W/in³
MTBF	<ul style="list-style-type: none"> • > 950 kHrs to MIL-HDBK-217F at 25 °C, GB

Environmental

Operating Temperature	<ul style="list-style-type: none"> • -40 °C to +100 °C output power derates from 100% load at +70 °C linearly to 0% load at +100 °C
Case Temperature	<ul style="list-style-type: none"> • +100 °C max
Storage Temperature	<ul style="list-style-type: none"> • -55 °C to +125 °C
Cooling	<ul style="list-style-type: none"> • Convection cooled
Operating Humidity	<ul style="list-style-type: none"> • Up to 95% RH, non-condensing

EMC & Safety

Emissions	<ul style="list-style-type: none"> • EN55022, level A conducted (level B with external components, see application note), level B radiated
ESD Immunity	<ul style="list-style-type: none"> • EN61000-4-2, level 2 Perf Criteria A
Radiated Immunity	<ul style="list-style-type: none"> • EN61000-4-3, 3 V/m Perf Criteria A
Conducted Immunity	<ul style="list-style-type: none"> • EN61000-4-6, 3 V rms Perf Criteria A
Magnetic Fields	<ul style="list-style-type: none"> • EN61000-4-8, 10 A/m, Perf Criteria A
Safety Approvals	<ul style="list-style-type: none"> • EN60950-1, UL60950-1, CSA C22.2 No. 60950-1-03, pending, CE Mark LVD


Models and Ratings

Input Voltage ⁽¹⁾	Output Voltage	Output Current	Input Current ⁽²⁾		Efficiency	Model Number
			No Load	Full Load		
4.5-9.0 VDC	3.3 VDC	2.42 A	100 mA	1.905 A	82%	JCA1005S03
	5.0 VDC	1.60 A	84 mA	1.839 A	86%	JCA1005S05
	12.0 VDC	0.83 A	126 mA	2.324 A	85%	JCA1005S12
	15.0 VDC	0.66 A	120 mA	2.271 A	86%	JCA1005S15
	±5.0 VDC	±0.80 A	129 mA	1.918 A	82%	JCA1005D01
	±12.0 VDC	±0.42 A	126 mA	2.388 A	84%	JCA1005D02
	±15.0 VDC	±0.33 A	105 mA	2.297 A	85%	JCA1005D03
9-18 VDC	3.3 VDC	2.42 A	52 mA	0.784 A	84%	JCA1012S03
	5.0 VDC	1.60 A	49 mA	0.745 A	89%	JCA1012S05
	12.0 VDC	0.83 A	42 mA	0.930 A	89%	JCA1012S12
	15.0 VDC	0.66 A	42 mA	0.916 A	89%	JCA1012S15
	±5.0 VDC	±0.80 A	45 mA	0.778 A	85%	JCA1012D01
	±12.0 VDC	±0.42 A	44 mA	0.944 A	88%	JCA1012D02
	±15.0 VDC	±0.33 A	44 mA	0.915 A	89%	JCA1012D03
18-36 VDC	3.3 VDC	2.42 A	28 mA	0.388 A	85%	JCA1024S03
	5.0 VDC	1.60 A	27 mA	0.375 A	88%	JCA1024S05
	12.0 VDC	0.83 A	19 mA	0.461 A	89%	JCA1024S12
	15.0 VDC	0.66 A	18 mA	0.455 A	90%	JCA1024S15
	±5.0 VDC	±0.80 A	16 mA	0.387 A	85%	JCA1024D01
	±12.0 VDC	±0.42 A	22 mA	0.469 A	89%	JCA1024D02
	±15.0 VDC	±0.33 A	25 mA	0.455 A	90%	JCA1024D03
36-75 VDC	3.3 VDC	2.42 A	13 mA	0.199 A	82%	JCA1048S03
	5.0 VDC	1.60 A	11 mA	0.186 A	89%	JCA1048S05
	12.0 VDC	0.83 A	7 mA	0.231 A	89%	JCA1048S12
	15.0 VDC	0.66 A	9 mA	0.229 A	89%	JCA1048S15
	±5.0 VDC	±0.80 A	5 mA	0.194 A	85%	JCA1048D01
	±12.0 VDC	±0.42 A	9 mA	0.236 A	89%	JCA1048D02
	±15.0 VDC	±0.33 A	10 mA	0.229 A	89%	JCA1048D03

Notes

- Nominal input voltage 5, 12, 24 or 48 VDC.
- Input current is at nominal input voltage.
- Efficiency is measured at nominal input and full load at 25 °C.

Mechanical Details

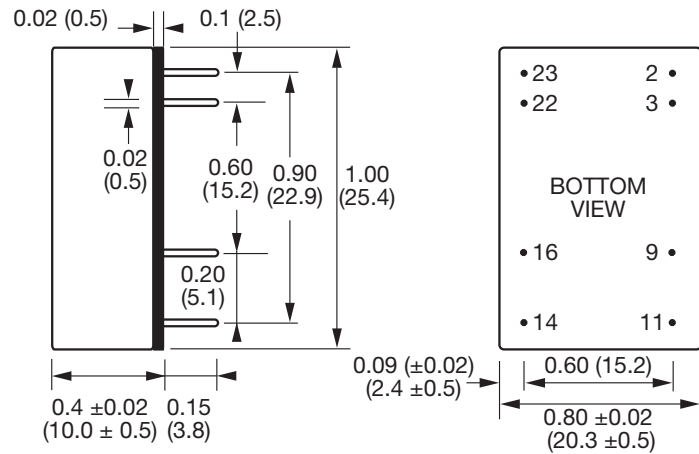

PIN CONNECTIONS		
Pin	Single Output	Dual Output
2	-Vin	-Vin
3	-Vin	-Vin
9	No pin	Common
11	N/C	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

- All dimensions in inches (mm)
- Weight: 0.03 lbs (12 g)
- Pin diameter tolerance: ±0.00079 (±0.02)
- Pin pitch tolerance: ±0.01 (±0.25)
- Case tolerance: ±0.02 (±0.5)

Application Note

Input Filter

To meet level B conducted emissions.

