

● **FEATURES:**

Power dissipation

P_D : 200 mW ($T_{amb}=25^\circ\text{C}$)

Collector current

I_F : 100 mA


Collector-base voltage

V_R : 20 V


Operating and storage junction temperature range

T_J, T_{stg} : -55°C to $+150^\circ\text{C}$

SOT-323

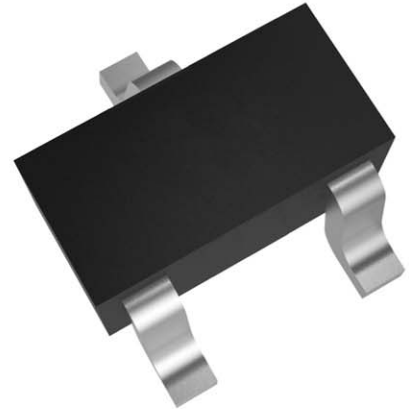

CIRCUIT:

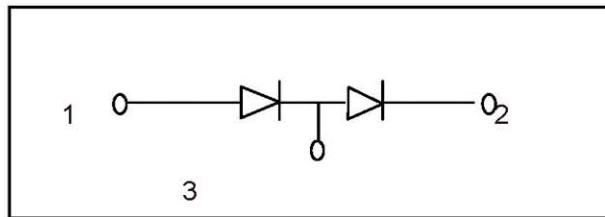

MARKING: K

● **ELECTRICAL CHARACTERISTICS** ($T_{amb}=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)}$	$I_R=100\mu\text{A}$	20		V
Reverse voltage leakage current	I_R	$V_R=15\text{V}$		0.1	μA
Forward voltage	V_F	$I_F=10\text{mA}$		1	V

