



DHE1A~DHE1M

Surface Mount High Efficiency Recovery rectifiers

Major Ratings and Characteristics

$I_{F(AV)}$	1.0 A
V_{RRM}	50 V to 1000 V
I_{FSM}	25 A
I_R	5 μ A
V_F	1.0V, 1.3V, 1.7V
T_J max.	150 °C




Features

- Low profile space
- Ideal for automated placement
- Glass passivated chip junctions
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering:
260 °C/10 seconds at terminals
- Component in accordance to
RoHS 2002/95/1 and WEEE 2002/96/EC

Mechanical Data

- **Case:** JEDEC SOD-123FL molded plastic body over glass passivated chip
- **Terminals:** Solder plated, solderable per J-STD-002B and JESD22-B102D
- **Polarity:** Laser band denotes cathode end
- **Weight:** 0.017gram

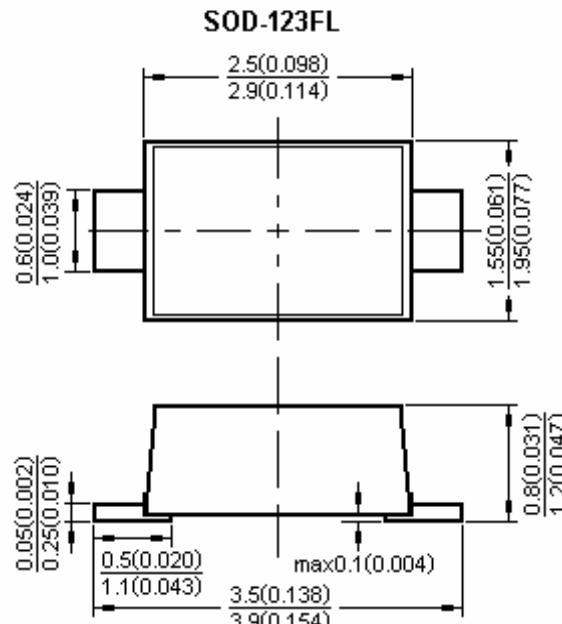

Dimensions in millimeters and (inches)

Maximum Ratings & Thermal Characteristics & Electrical Characteristics

($T_A = 25$ °C unless otherwise noted)

	Symbol	DHE 1A	DHE 1B	DHE 1D	DHE 1F	DHE 1G	DHE 1J	DHE 1K	DHE 1M	UNIT		
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	300	400	600	800	1000	V		
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	420	560	700	V		
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	600	800	1000	V		
Maximum average forward rectified current	$I_{F(AV)}$	1							A			
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	25							A			
Maximum instantaneous forward voltage at 1.0A	V_F	1.0		1.3		1.7		V				
Maximum DC reverse current $T_A = 25$ °C at Rated DC blocking voltage $T_A = 100$ °C	I_R	5.0 100							μ A			
Maximum reverse recovery time at $I_F = 0.5$ A , $I_R = 1.0$ A , $I_{rr} = 0.25$ A	t_{rr}	50				75				nS		
Thermal resistance from junction to ambient(Note1)	$R_{\theta JA}$	150							°C/W			
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							°C			

Note1: Mounted on P.C.Board with 0.9*1.5mm² copper pad area.





DHE1A~DHE1M

Surface Mount High Efficiency Recovery rectifiers

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

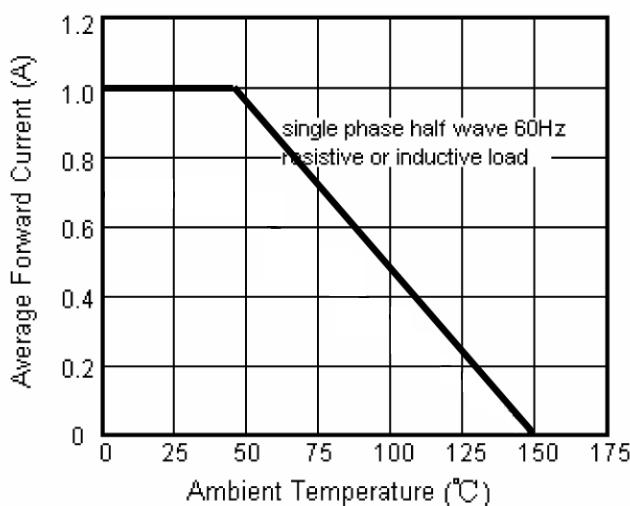


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

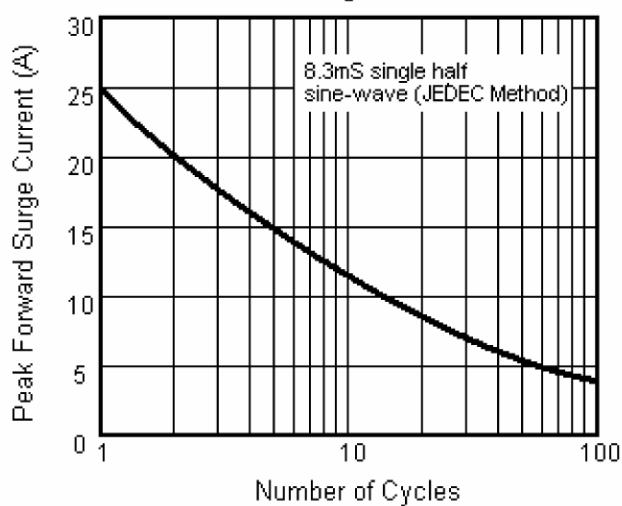


Fig.3 Typical Instantaneous Forward Characteristics

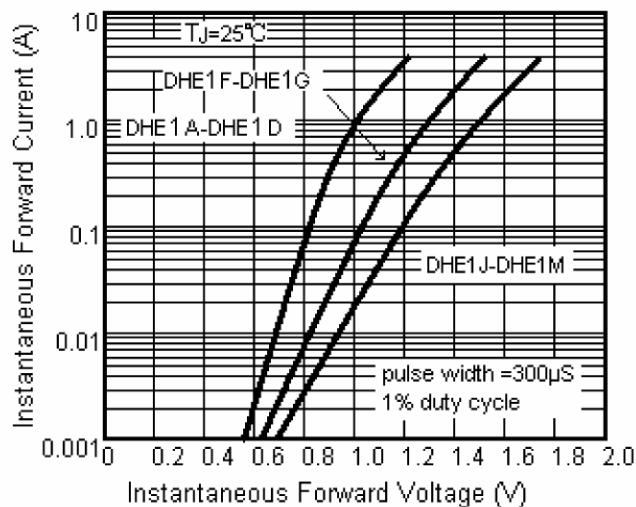


Fig.4 Typical Reverse Characteristics

