Rev	AWO #	Description	Date	Appr
-		RELEASED	3/01/11	

APPROVED: _____

DATE: _____ TITLE: _____

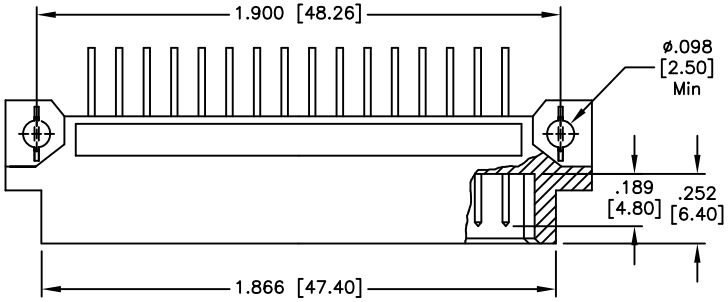

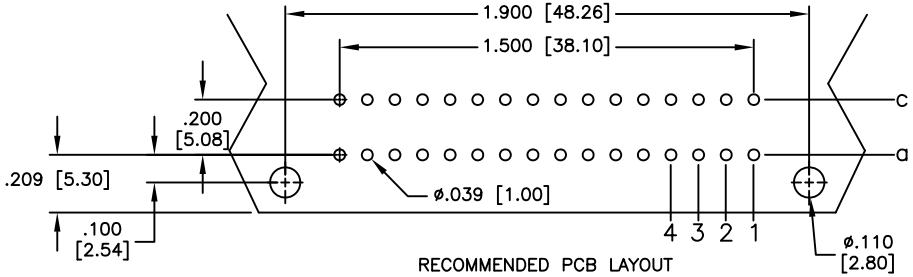

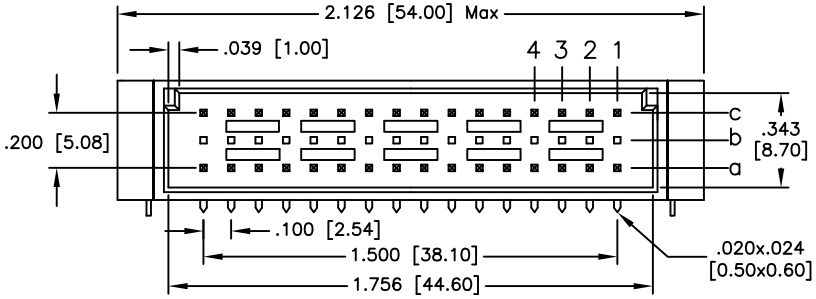

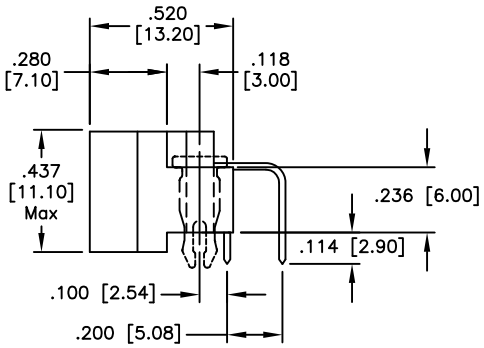

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Beige
Contacts: Copper Alloy
Plating:
X Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails.
(See chart for thickness)
Electrical:
Current rating: 2 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +125°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

"X"	PLATING	CLASS
1	30 u" Gold	1
2	15 u" Gold	2
3	Gold Flash	3

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	3/01/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
DIN TYPE HALF C MALE, 32 PIN LOADED
3 ROW RIGHT ANGLE, ROW A& C LOADED

SIZE	PART NO.	REV.
X	DIN-32MR-S32-A1CX-BL	-

REF: S00058T | SCALE: NTS | SHEET 1 OF 1