




28W 120V AC 572mm Linear LED Module

AC LED Technology by Lynk Labs
Compatible with Phase-cut Dimmers
5 yr. Warranty

Specifications

Drive Voltage:	120Vac (100-132V Min-Max)
AC Current:	240 mA @25°C typical; 290 mA max
Power Dissipation:	28W typical; 36W max
Power Factor:	>0.97
THD:	<20%
Life:	50,000 Hrs
Luminous Flux:	see chart
Luminous Efficacy:	see chart
Viewing Angle:	120 deg
Operating Temp:	-25°C to +100°C
Storage Temp:	-40°C to +100°C
Soldering Temp:	370°C

Line voltage AC LED modules are easy to use, offering direct connectivity and effectively replacing traditional lamp technologies. Patented AC LED technology eliminates the need for an AC-DC driver.

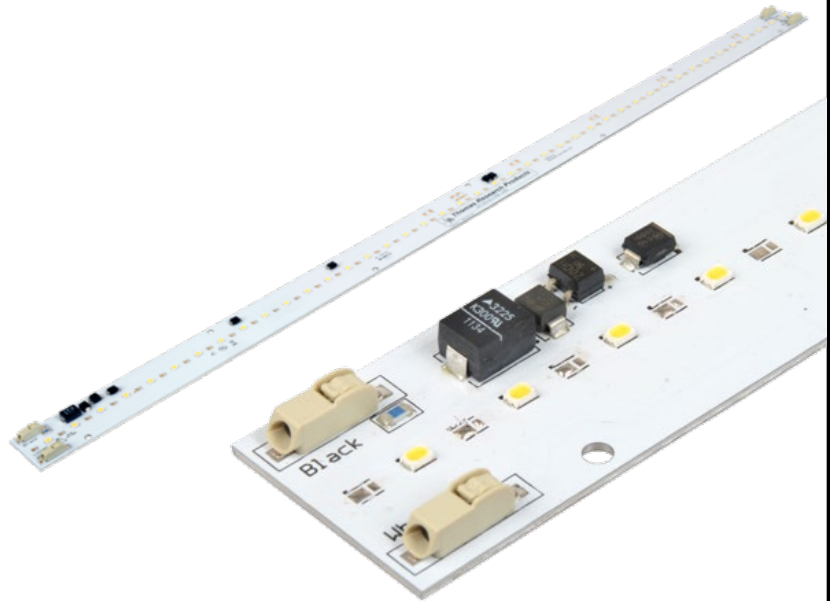

Features

- Direct 120V line connection
- Compatible with most existing leading edge or trailing edge phase cut AC Dimmers
- High Power Efficiency
- Significant Energy Savings
- Reliable, fast and easy
- Durable Light Source
- Long Operating Life
- Releasable Poke-in Connectors


Applications

- Troffer Replacement
- Fluorescent Tube Replacement
- Indoor/Outdoor General Line-voltage Illumination
- Ideal for commercial, hospitality or residential

572mm 120V AC Linear LED Module 28W					
Model Number	Input Power (W)	Input Voltage (Vac)	Color Temp (K)	Lumens (±10%)	LPW
99046	28	120	2200	2193	78
99268	28	120	2700	2287	82
99047	28	120	3000	2333	83
99269	28	120	3500	2380	85
99048	28	120	4000	2427	87
99049	28	120	5000	2473	88
99050	28	120	5700	2497	89

Dimensions:

572 ±0.254 mm L x 28.6 ±0.254mm W x 4.8 mm H

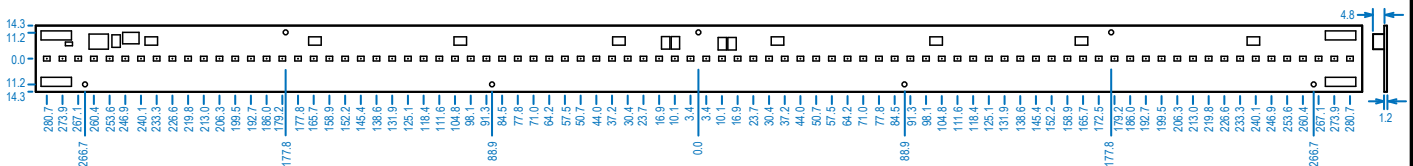


Modules can be daisy-chained, limit of 10m per chain.



Specifications subject to change without notice. Trademarks are property of their respective owners.

CIE Chromaticity Coordinates:

White Binning Structure Graphical Representation

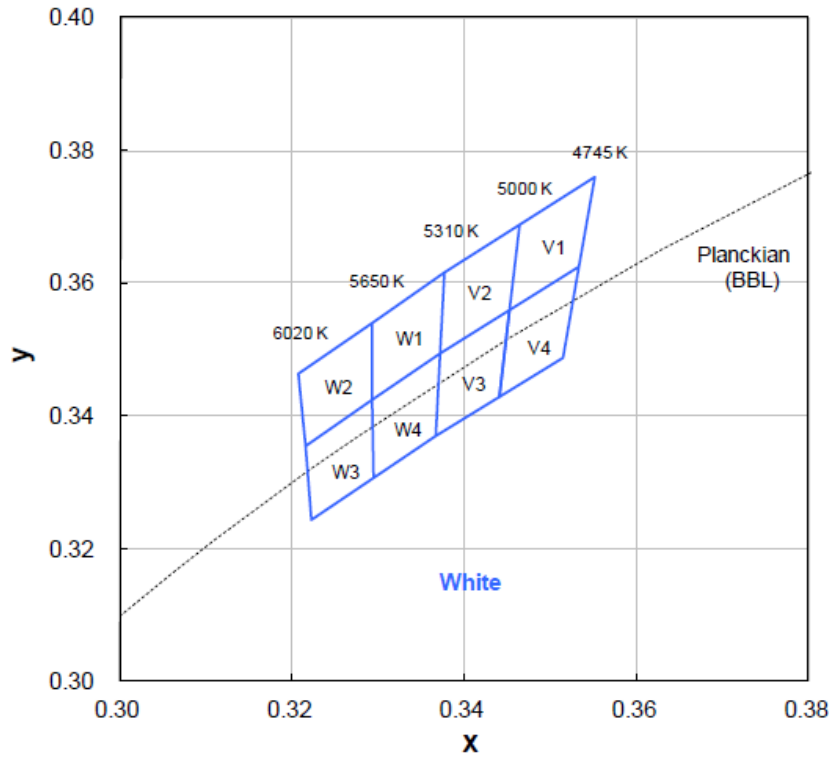


White Bin Structure

Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
V1	0.346	0.369	4870	W1	0.329	0.354	5475
	0.355	0.376			0.338	0.362	
	0.353	0.362			0.337	0.349	
V4	0.345	0.356	4870	W4	0.329	0.342	5475
	0.345	0.356			0.329	0.342	
	0.353	0.362			0.337	0.349	
	0.352	0.349			0.337	0.337	
V2	0.344	0.343	5155	W2	0.329	0.331	5830
	0.338	0.362			0.321	0.346	
	0.346	0.369			0.329	0.354	
	0.345	0.356			0.329	0.342	
V3	0.337	0.349	5155	W3	0.322	0.335	5830
	0.337	0.349			0.322	0.335	
	0.345	0.356			0.329	0.342	
	0.344	0.343			0.329	0.331	
	0.337	0.337			0.322	0.324	

● Tolerance on each color bin (x , y) is ± 0.01

Neutral White Binning Structure Graphical Representation

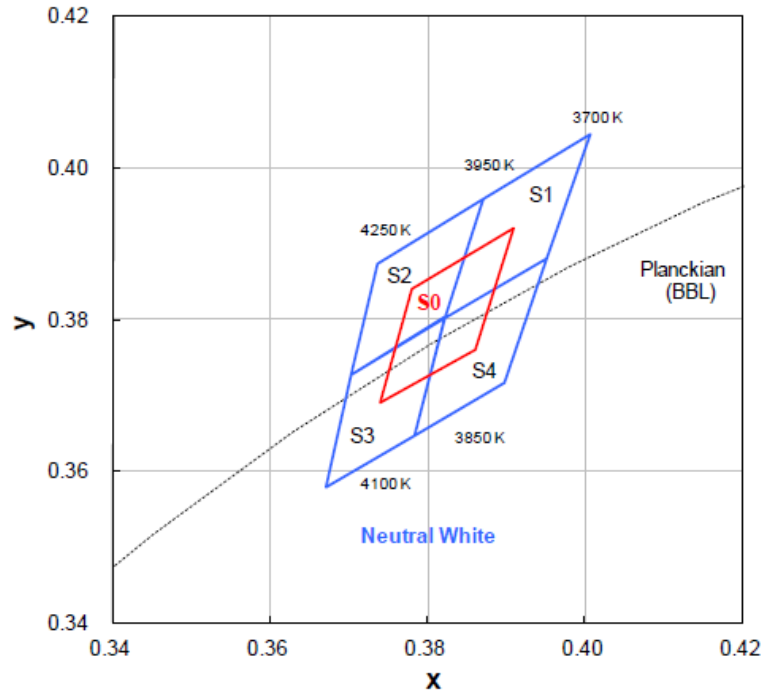


Neutral White Bin Structure

Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
S1	0.387	0.396	3825	S2	0.374	0.387	4100
	0.401	0.404			0.387	0.396	
	0.395	0.388			0.382	0.380	
	0.382	0.380			0.370	0.373	
S4	0.382	0.380	3825	S3	0.370	0.373	4100
	0.395	0.388			0.382	0.380	
	0.390	0.372			0.378	0.365	
	0.378	0.365			0.367	0.358	
S0	0.374	0.369	3975				
	0.378	0.384					
	0.391	0.392					
	0.386	0.376					

● Tolerance on each color bin (x , y) is ± 0.01

Warm White Binning Structure Graphical Representation

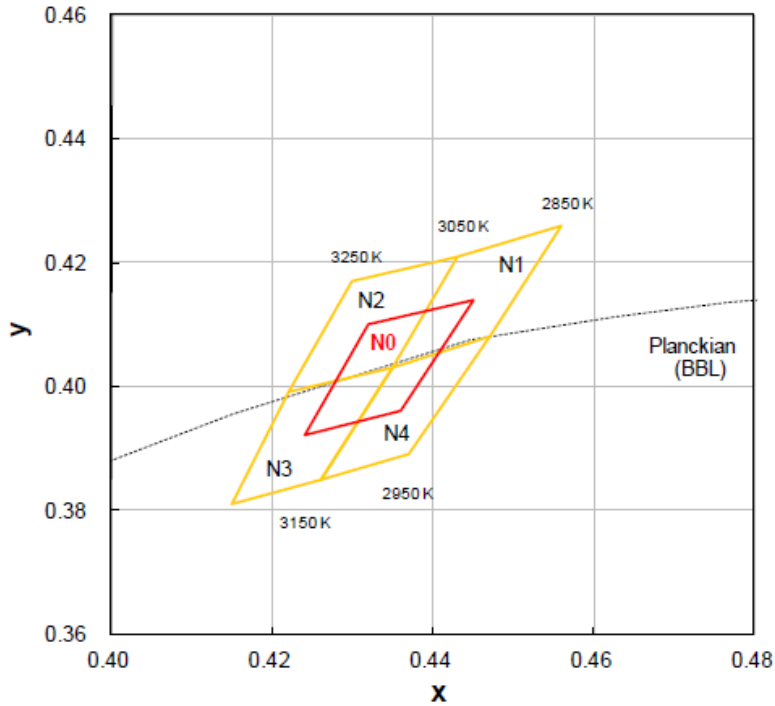

Warm White Bin Structure

Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
N1	0.443	0.421	2950	N2	0.430	0.417	3150
	0.456	0.426			0.443	0.421	
	0.447	0.408			0.435	0.403	
N4	0.435	0.403	2950	N3	0.422	0.399	3150
	0.447	0.408			0.435	0.403	
	0.437	0.389			0.426	0.385	
	0.426	0.385			0.415	0.381	
N0	0.424	0.392	3050				
	0.432	0.410					
	0.445	0.414					
	0.436	0.396					

- Tolerance on each color bin (x , y) is ± 0.01




28W 572mm 120V Linear AC LED Light Engine


SSL Solutions Faster Than The Speed Of Light®

Typical Electrical & Optical Characteristic Curves:


Relative Power / Voltage

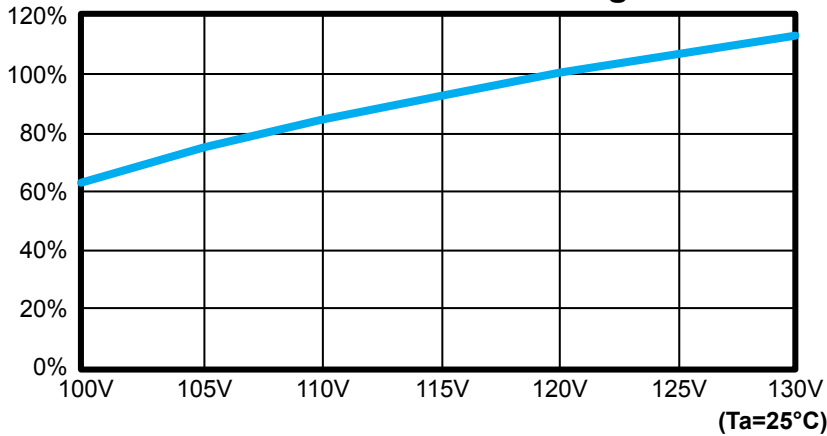

Relative Luminous Flux / Voltage


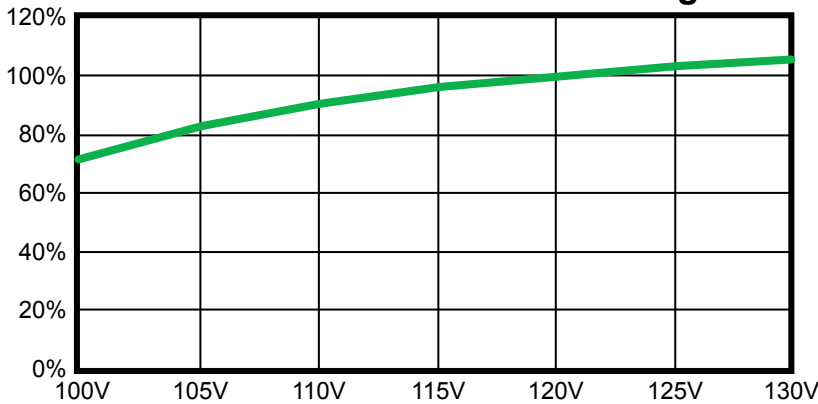


Lumen Thermal De-Rating Curve

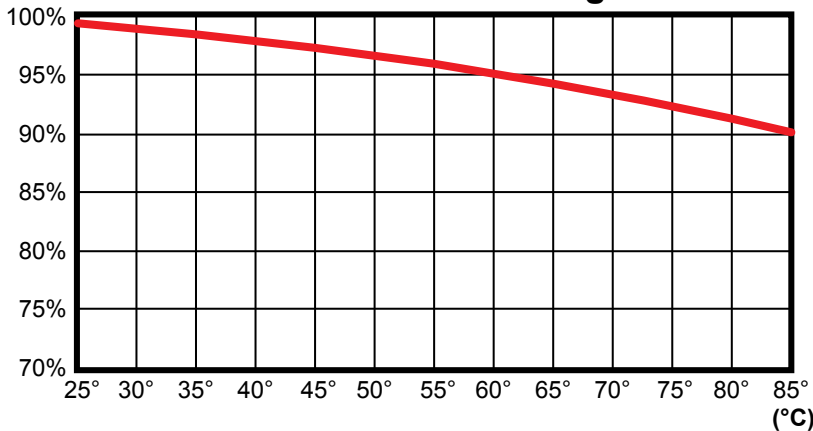


Typical Electrical & Optical Characteristic Curves:


1. White

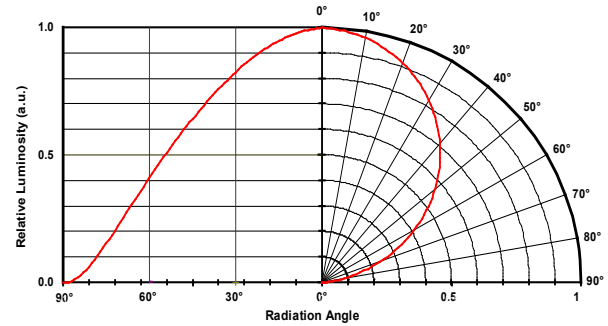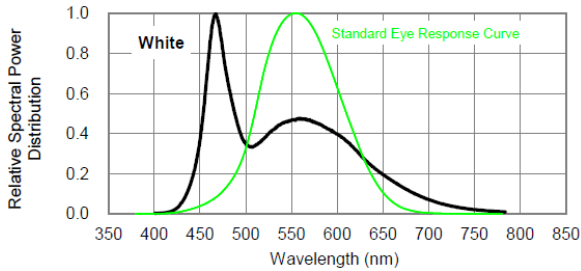

2. Neutral White

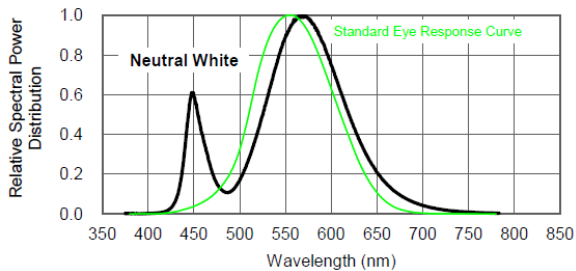

3. Warm White

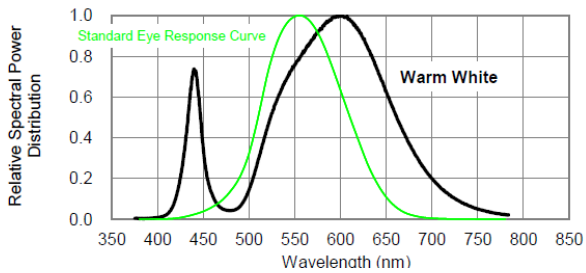

Packaging

- LED Modules will be packaged in trays for primary protection.
- According to the total delivery amount, cardboard boxes will be used to protect the trays of LED Modules from mechanical shocks during transportation.
- The boxes are not water resistant and therefore must be kept away from water and moisture.

Reliability and Average Lumen Maintenance

Before releasing new products the manufacturer puts a representative product sample set through an entire suite of qualification tests, including the most stressful test for high power LEDs, the Wet High-Temperature Operating Life (WHTOL) test at 85°C/85%RH for 1000 hours at the specified operating current.

LED lifetime has been extrapolated based on the accumulated operating and accelerated aging data. Based on this data, the manufacturer projects that the LED products will deliver, on average, 70% lumen maintenance at 50,000 hours of operation at the specified operating current, provided that the case temperature is maintained at or below 80°C.