
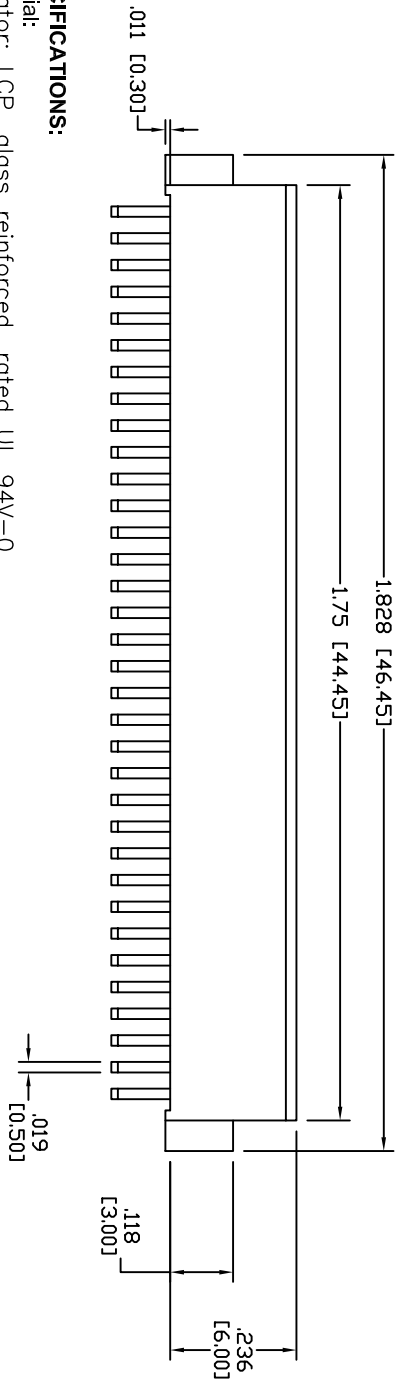
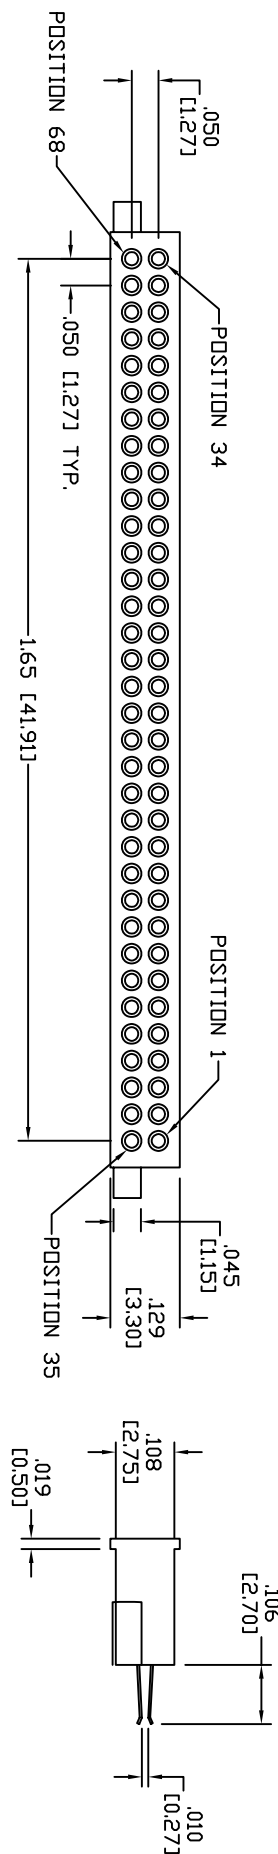


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/6/07	

APPROVED: _____
 DATE: _____ TITLE: _____

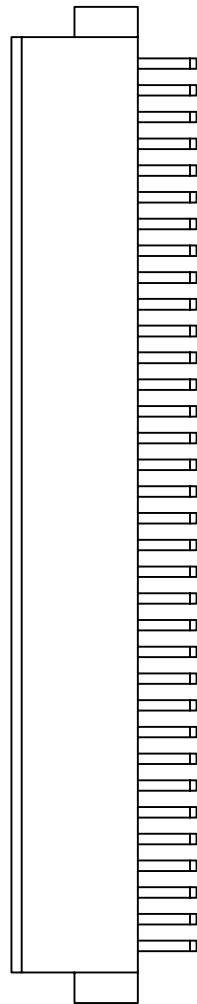

SPECIFICATIONS:

Material:
 Insulator: LCP, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating:
 Gold flash over Nickel underplate on contact area, Tin over Copper underplate on straddle mount tails

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 40 mohms max.
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -20°C to +80°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C. for 5 sec.

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: COMPACT FLASH SOCKET, 68 POSITION, VERTICAL, STRADDLE MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .010
ØX	± .10
ØXXX	± .015
ØXXX	± .010
APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	CFS-68-A-SG-SM	-
REF:	SCALE: NTS	SHEET 1 OF 1

