



FERYSTER

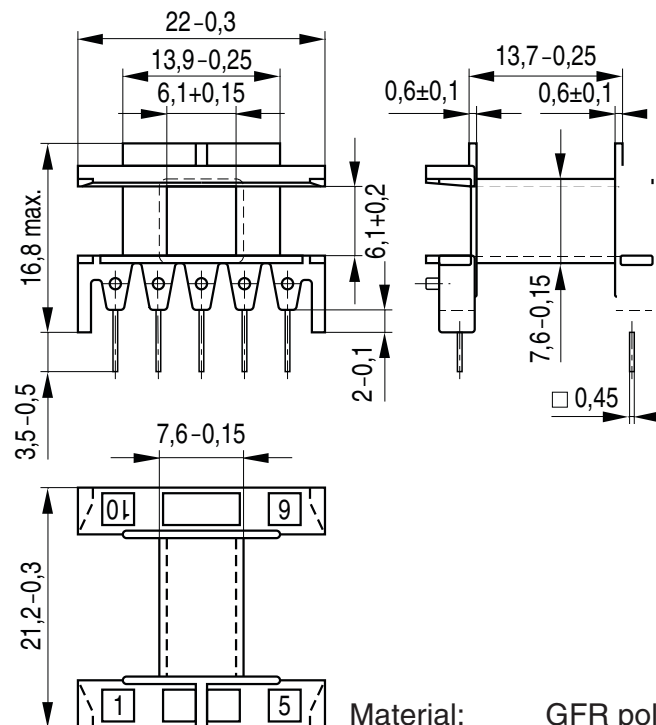

Hole arrangement
View in mounting
direction



Material: GFR polyterephthalate (UL 94 V-0, insulation class to IEC 60085: F max. operating temperature 155 °C), color code black Valox 420-SE0® [E45329 (M)], GE PLASTICS B V

Solderability: to IEC 60068-2-20, test Ta, method 1 (aging 3): 235 °C, 2 s

Resistance to soldering heat: to IEC 60068-2-20, test Tb, method 1B: 350 °C, 3.5 s

www.
FERYSTER®
-pl

FERYSTER® spółka jawna B. i Z. Sobków
PRODUCENT ELEMENTÓW INDUKCYJNYCH

EF20-K-H-10P