

NCR18650B Standard data


March, 2012

Energy Company of Panasonic Group

Lithium-Ion Battery Business Unit

High Capacity type

TENTATIVE

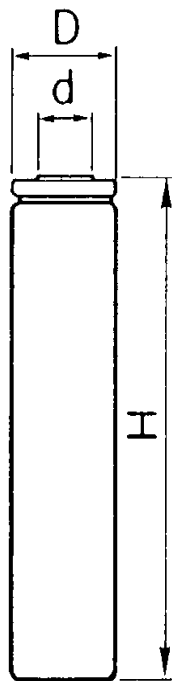

Dimensions(Typ.) of Bare Cell	H	64.93mm
	D	18.2mm
	d	7.9 mm

Discharged State after Assembling

Cell Type NCR18650B

Specification


Rated Capacity		*at 20deg.C	Min.3200mAh
Nominal Capacity		*at 25deg.C	Min.3250mAh
			Typ.3350mAh
Nominal Voltage			3.6V
Charging Method			Constant Current -Constant Voltage
Charging Voltage			4.2V
Charging Current			Std.1625mA
Charging Time			4.0hrs.
Ambient Temperature	Charge		10~+45°C
	Discharge		-20~+60°C
	Storage		-20~+50°C
Weight (Max.)			47.5g
Dimensions (Max.)*	(D)		18.25mm *without tube
			18.50mm *with tube
	(H)		65.10mm *without tube
			65.30mm *with tube
Volumetric Energy Density			676Wh/l
Gravimetric Energy Density			243Wh/kg

*Maximum size without tube

Panasonic ideas for life

TENTATIVE

Discharge Rate Characteristics for NCR18650B

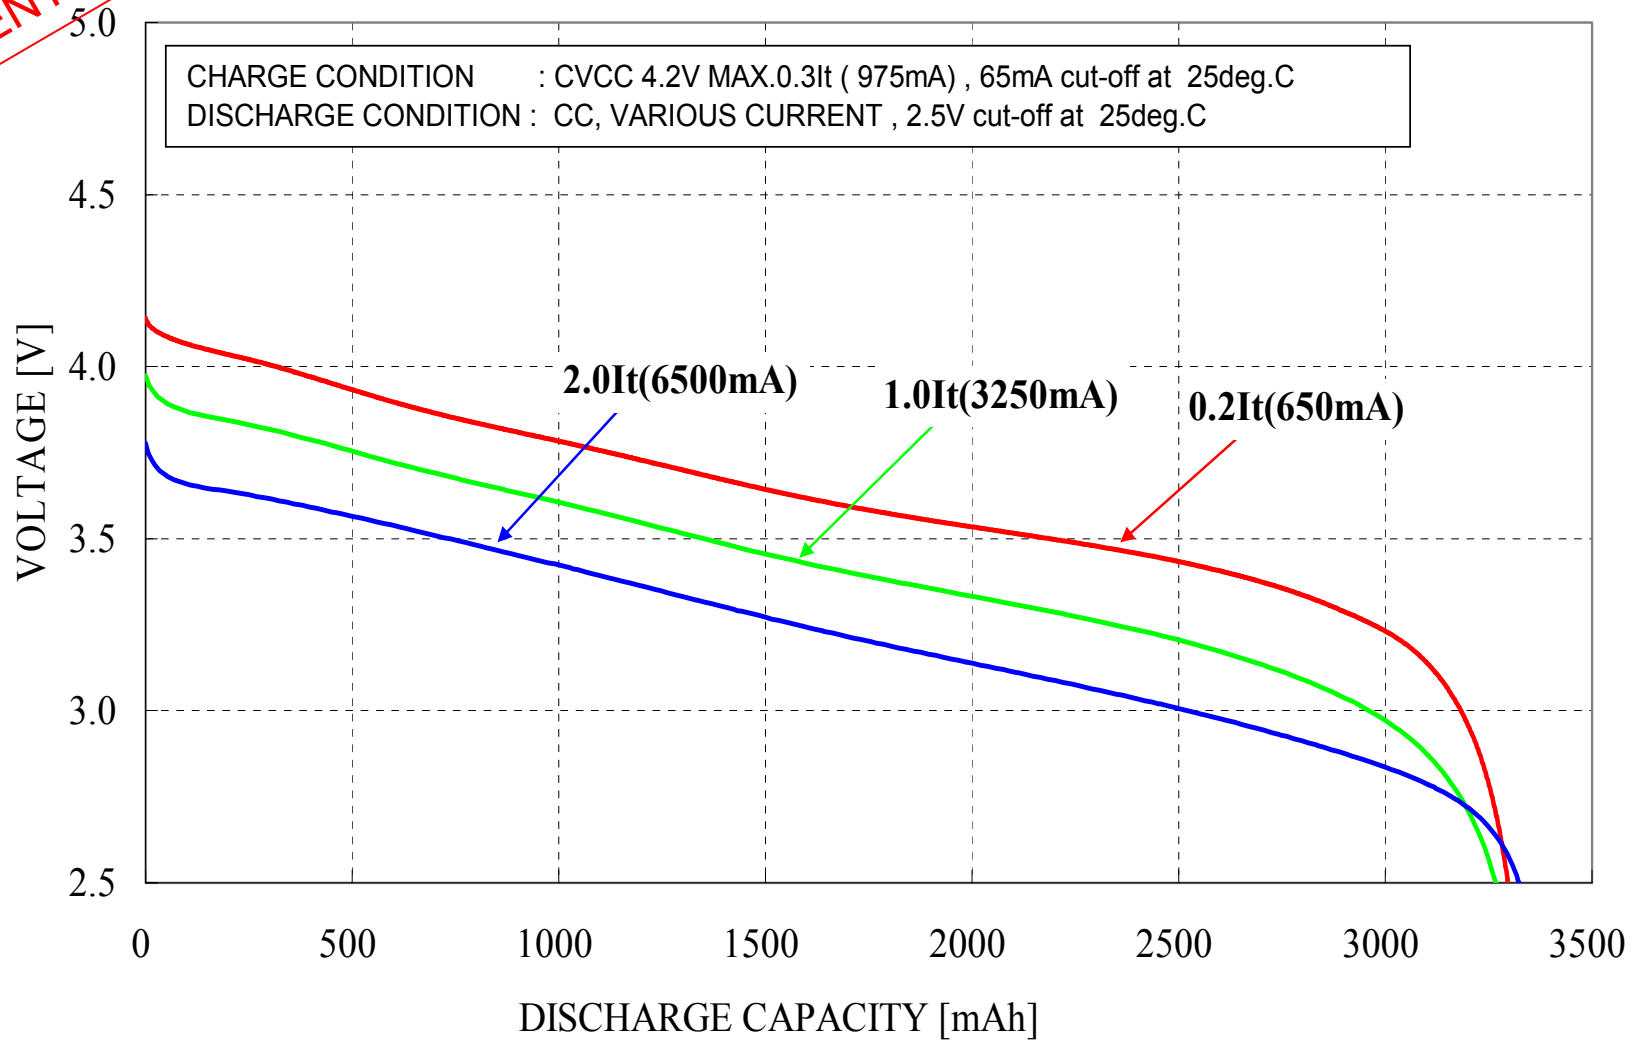


Panasonic ideas for life

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.


TENTATIVE

Discharge Temperature Characteristics for NCR18650B

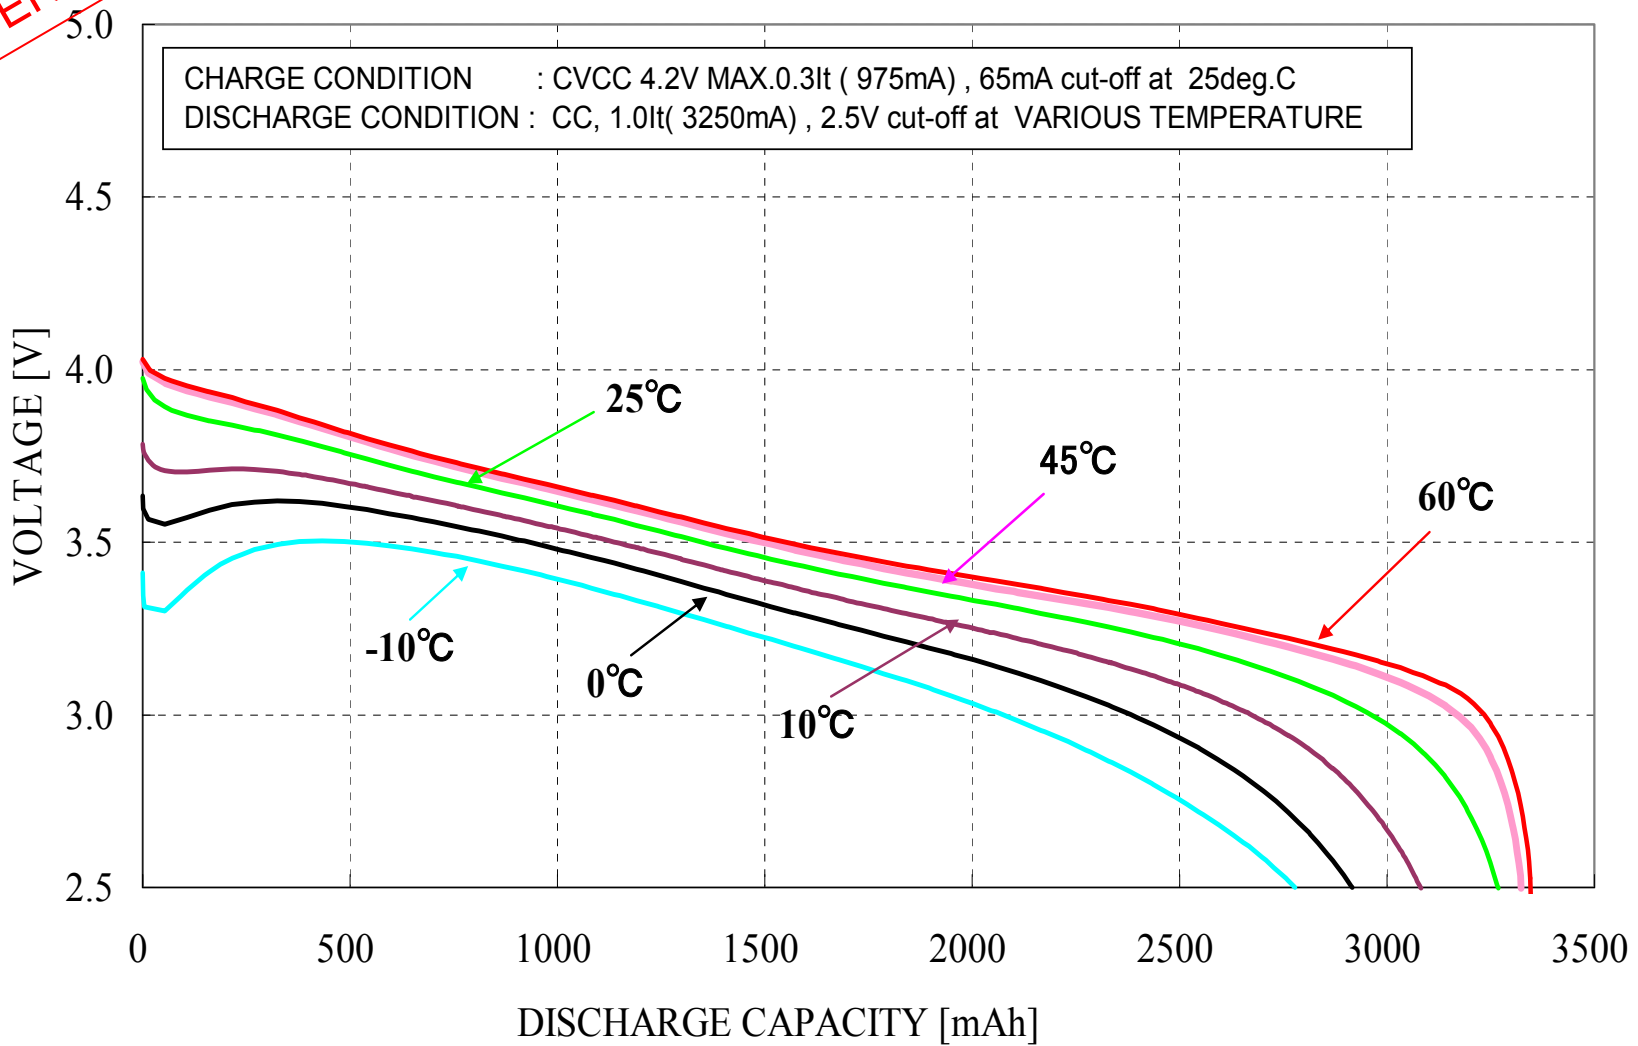


TENTATIVE

Charge Characteristics for NCR18650B

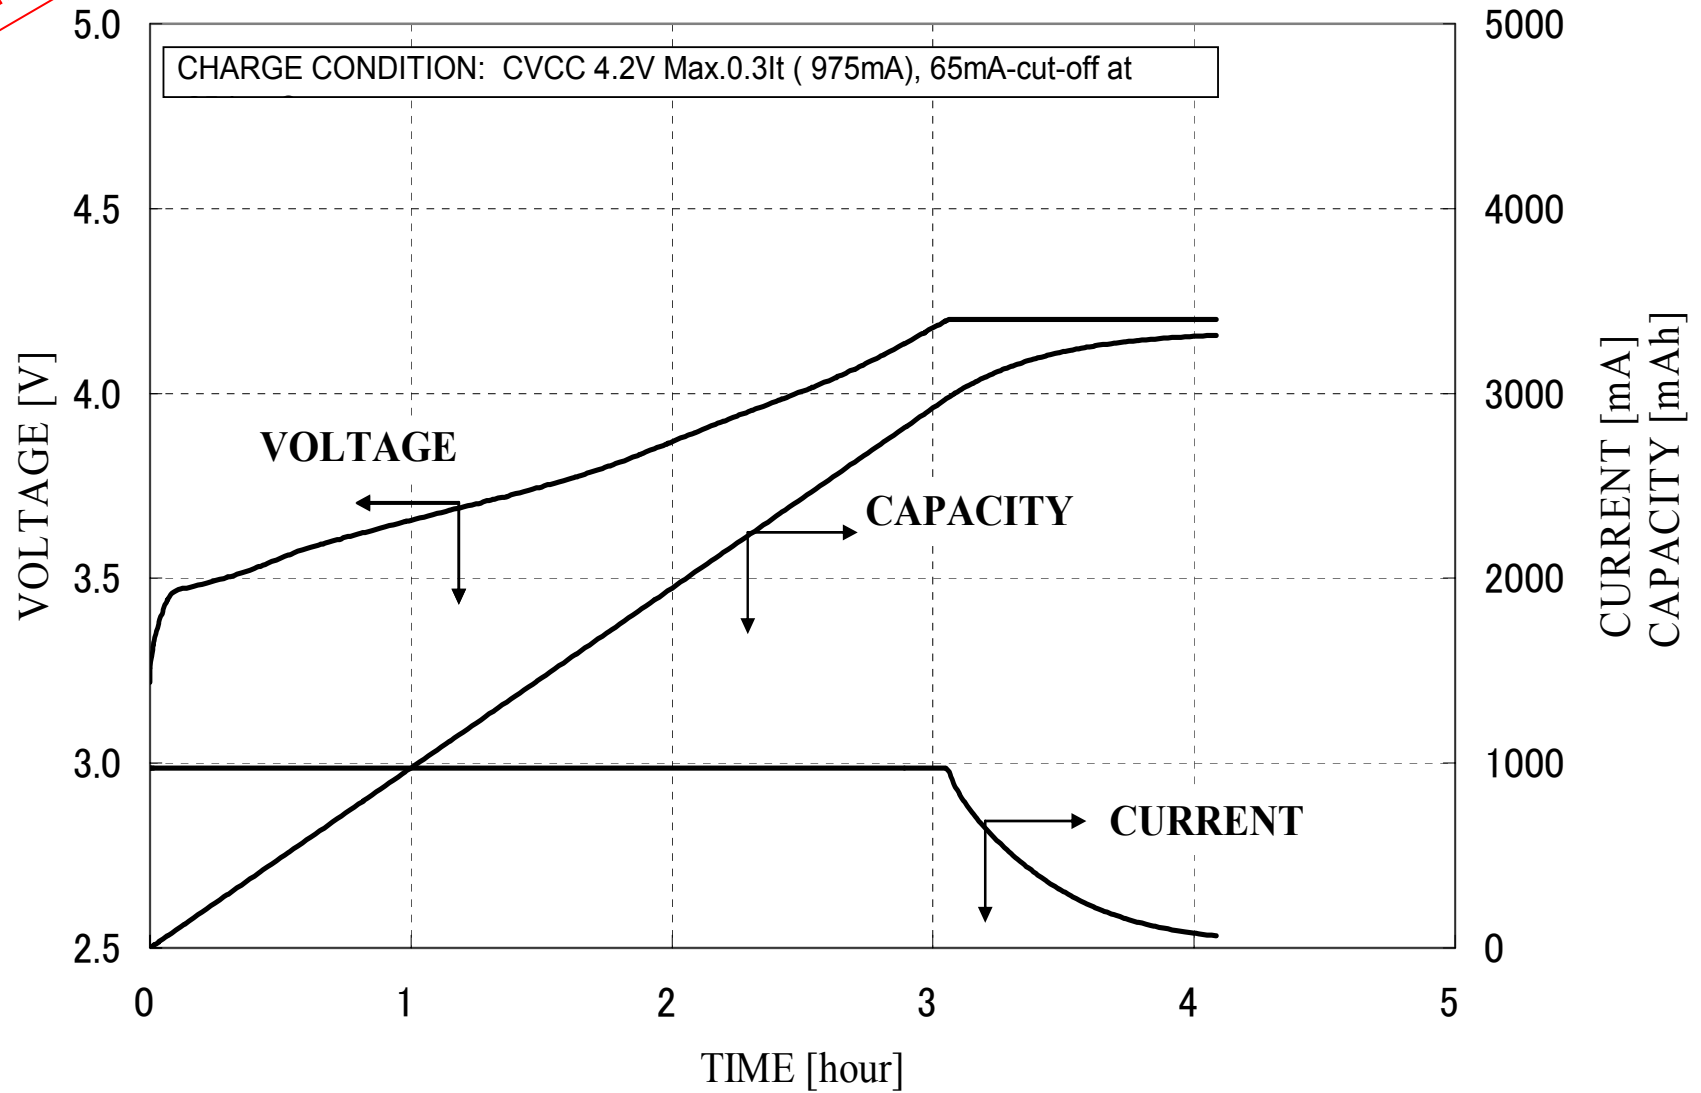

TENTATIVE

Cycle Characteristics for NCR18650B

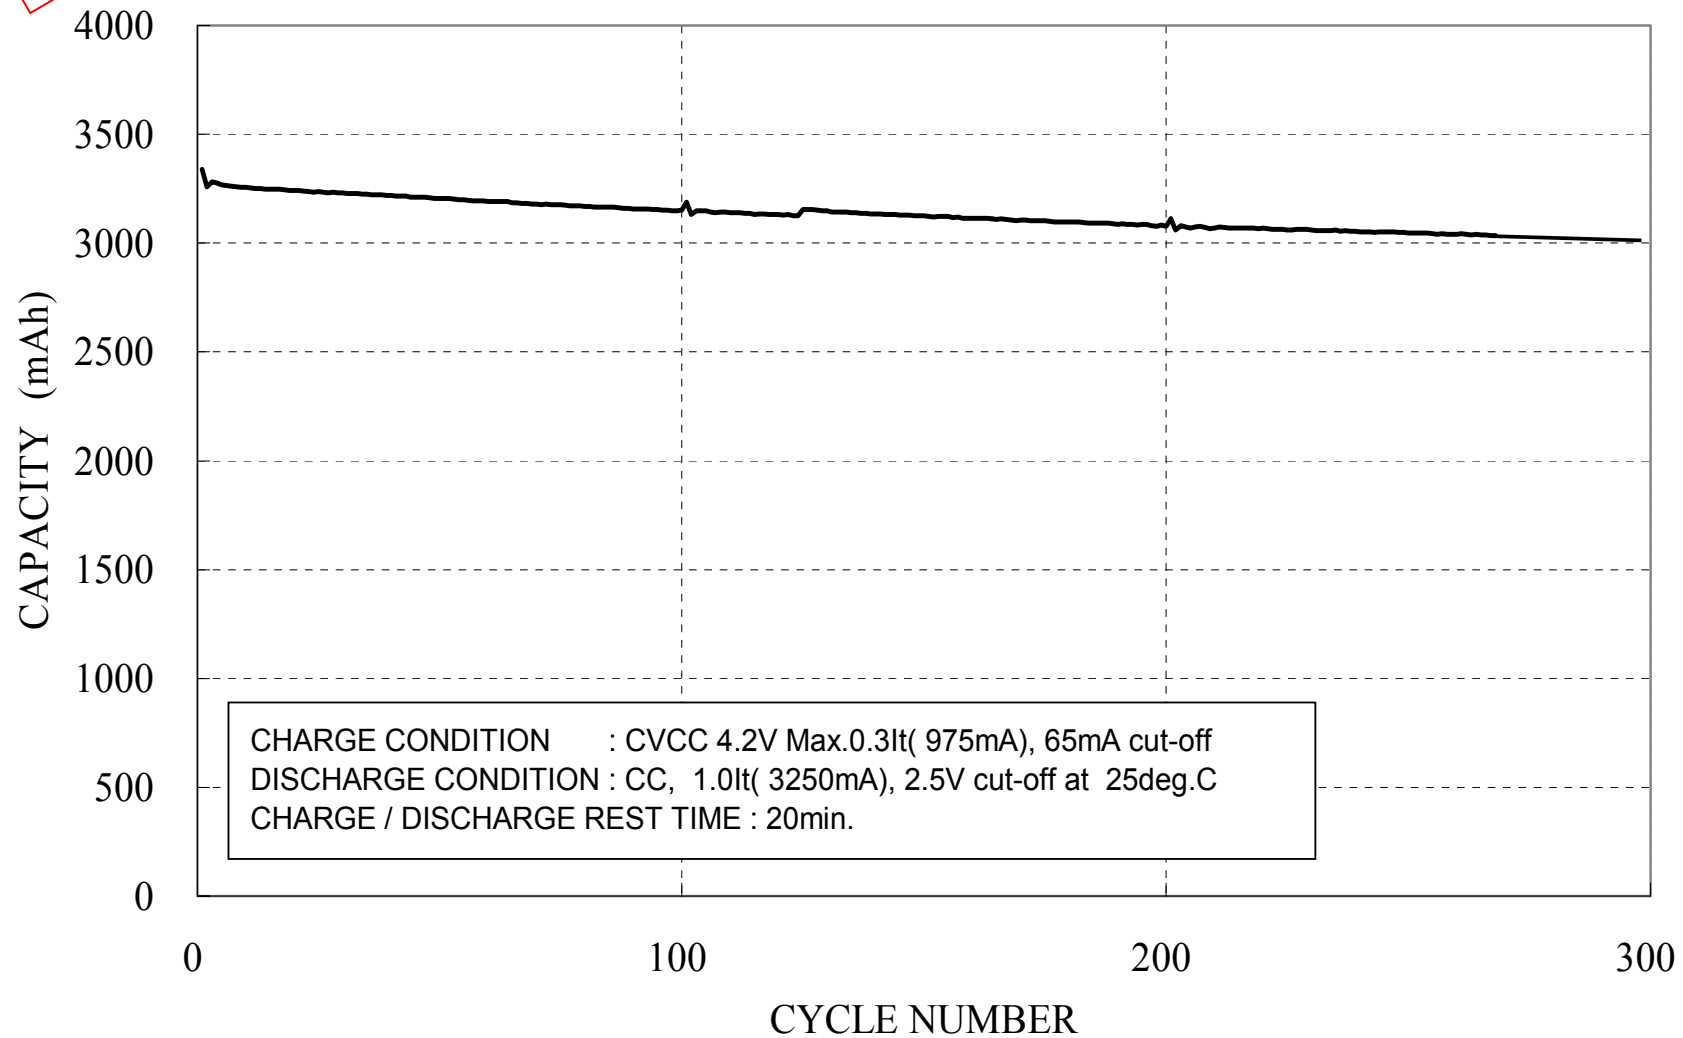

Panasonic
ideas for life